# 48-INCH BUILT-IN FRENCH DOOR REFRIGERATOR, PRE-ASSEMBLED, PROFESSIONAL DESIGN













# PRE-ASSEMBLED PROFESSIONAL STAINLESS STEEL PANELS, HANDLES & FRAME KIT

Pre-Assembled, for a simplified and faster installation.

#### SIGNATURE FIT™ PROUD OR FLUSH DESIGN

Versatile design allows for ¾" proud installation in existing 24" deep cabinets or true flush installation in 25" deep cabinetry. All drawers line up with standard countertop height a seamless look.

# DUAL COMPRESSORS & DUAL EVAPORATORS FOR PRECISE PRESERVATION

Always keeps temperature fluctuation within +/-1° F to enhance food freshness for longer period of time\*. Separated cooling from refrigerator and freezer keeps compartments at optimized humidity.

#### **CONVERTIBLE FRIDGE/FREEZER DRAWER**

Innovative convertible fridge/freezer drawer offers five preset temperatures zones for precise food preservation: chilled wine, fridge deli, meats and seafood, cold drinks, or drop the temperature all the way down to make it a freezer when you need it.

# INTERNAL WATER DISPENSER & DUAL ICE MAKER WITH CRAFT ICE°

The internal water dispenser delivers cold, fresh, filtered water with a simple touch. Options for both the slow-melting, spherical Craft Ice and frustum ice elevate beverages of all kinds.

#### **Style**

Door Style / Handles	
Professional Stainless Steel Panels and	Handles
Interior Cabinet Finish	Metal

Innovation	
Wi-Fi Enabled for ThinQ° Control with iPhone / Android App	Yes
Remote Operations	Yes
4 Drawer Design	Yes
Craft Ice® and Cubed Ice	Yes

Performance	
Dual Smart Inverter Compressors	Yes
Dual Evaporators	Yes
Smart Cooling Plus® System	Yes
IcePlus®	Yes
Adaptive Defrost	Yes

#### Modes

Sabbath, IcePlus®, Demo, Icemaker On / Off, Power On / Off, Temp Control, Water Filter Reset, Smart Diagnosis, Wi-Fi. Smart Grid

Internal Water Dispenser	Yes
Water Filter (6 Months)	Yes
Fresh Air Filter	Yes

# **Capacity and Storage**

. ,	
Total Capacity (cu. ft.)	26.0
Refrigerator Capacity (cu. ft.)	18.35
Freezer Capacity (cu. ft.)	7.65
Full-Extension Freezer Storage Drawer	2 Soft Close / Self Close
Full-Extension Dual Icemaker Drawer	1 Soft Close / Self Close
Full-Extension Convertible Drawer	1 Soft Close / Self Close

Convertible Drawer Modes

Freezer (-7° to 5° F), Meat / Seafood (30° F), Cold Drinks (33° F), Fridge / Deli (37° F), Chilled Wine (41° F)

©2025 LG Electronics USA, Inc. All rights reserved. "Signature Kitchen Suite" and the Signature Kitchen Suite logo are registered trademarks of LG Electronics Inc. Design, features and specifications are subject to change without notice. Specifications are for planning purposes only. Consult the product's installation instructions for final dimensional data and other details prior to making cutouts or custom panels. Consult with a heating and ventilation engineer for your specific ventilation requirements. Non-metric weights and measurements are approximate. Smart features require Internet access.

<sup>\*</sup>Based on TÜV Rheinland test results using LG's internal testing method measuring the average peak to peak temperature fluctuation in the fresh food compartment at the factory temperature setting under no load condition. Applicable models only. The result may vary in actual usage.

# 48-INCH BUILT-IN FRENCH DOOR REFRIGERATOR, PRE-ASSEMBLED, PROFESSIONAL DESIGN



## **Capacity and Storage (continued)**

Convertible Drawer Dividers	1
Storage Shelves	4 Adjustable w/LED Lighting, 1 Fixed
Lift and Go™ Crisper / Storage Drawers	2 Soft Close / Self Close
Aluminum Framed Door Bins (Holds 2-Liter Bottles)	6 Adjustable

### **General Features**

LCD Touch Screen	Yes
Water Filter Indicator	Yes
Dual Ice Makers with Craft Ice®	Yes
Ice Production (24 Hrs.), Cubed	3.5 lbs (3.8 lbs with IcePlus°)
Ice Production (24 Hrs.) Craft Ice®	3 Clear or 6 Standard
Ice On / Off	Yes
Smart Grid Ready	Yes
Hidden LED Interior Lighting	Yes
Operating Temperatures	<u>'</u>

# Operating Temperatures Refrigerator: 33° to 43° F

Convertible Drawer: 5 Preset Modes

Freezer Drawers: -7° to 5° F

Temperature Sensors	4
Door Alarm	Yes
Cooling System	Multi-Air-Flow Technology
Maximum Sound Level	39 dBA
Star-K Certified Sabbath Mode	Yes
ENERGY STAR® Certified	Yes

## Installation Features

Four Point Front Adjustable with 5 Wheels	Yes
Attachment Method to Cabinetry	Top with No Visible Screws
Front Serviceable	Yes
Anti-tip Bracket Included	Yes

## **Technical Specs**


reclinical opecs	
Required Power Supply	115 V, 60 Hz, 15 Amp
Plug Type	3-Prong
Power Cord Length	86 1/2"
Dimensions and Weight	
Overall Width (inches)	47 1/4"
Overall Height (inches)	83 1/2" Min. – 84 3/16" Max.
Overall Depth Without Panel or Handles (inches)	23 7/8"
Net Weight (approx.)	761 lbs.
Shipping Weight (approx.)	840 lbs.
Optional Accessories	
Replacement Water Filter	LT1000P-S
Warranty Summary*	
Limited Warranty, Parts & Labor	3 Years
Limited Warranty, Sealed System and Compressor, Parts & Labor	5 Years
Limited Warranty Compressor, Parts Only	10 Years

<sup>\*</sup>These warranties give you specific legal rights and you may have other rights that vary from state to state. For complete warranty details, refer to your Use & Care manual.

# 48-INCH BUILT-IN FRENCH DOOR REFRIGERATOR, PRE-ASSEMBLED, PROFESSIONAL DESIGN




#### **CUTOUT DIMENSIONS - FLUSH AND PROUD INSTALLATION**

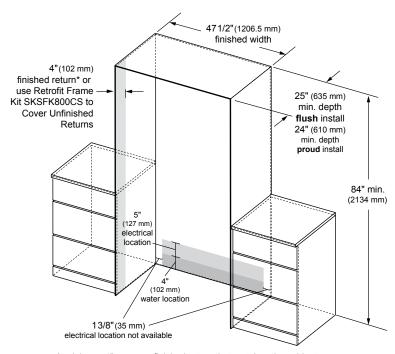

\*A minimum 4" (102 mm) finished return that matches the cabinet exterior is recommended on all sides and the top of the cutout opening. The shaded area will be visible after installation.

# INSTALLATION CLEARANCES - FLUSH INSTALLATION TOP VIEW



#### **Notes**

**Door Swing Clearances** – The installation must allow for clearances to adjacent walls or cabinets. This refrigerator is equipped with a 2-position door stop. The factory-set 115° door swing can be adjusted to 90° if clearance to adjacent cabinets or walls is restricted.

**Door Handle Clearances** – The pre-assembled unit uses a Stainless Steel Door Panel Kit w/Handles with the Brushed Aluminum Handles. The door handle clearance with door open 115° is 12 15/16" (329 mm).

#### **Notes**

#### **Proud or Flush Installation**

Refrigerator installs proud in a 24" deep cutout. The pre-assembled panel protrudes with 3/4".

With a 25" (635 mm) cutout depth, the front face of the refrigerator fits flush with 25" (635 mm) depth adjacent cabinets.

#### **Electrical**

A 115V, 60Hz., 15 amp power supply is required. An individual properly grounded branch circuit or circuit breaker is recommended. Install a properly grounded 3-prong electrical receptacle recessed into the back wall. Electrical must be located on rear wall as shown.

**Note**: GFI (ground fault interrupter) is not recommended.

#### **Water Line**

A cold water supply is required for automatic icemaker operation. Water pressure must be between 20 and 120 p.s.i.

Tubing should be long enough to extend to the front of the refrigerator. Allow enough tubing to accommodate a bend leading into the water line connection.

Water line can enter an opening through floor or back wall.


Install a shut-off valve between the icemaker water valve and cold water supply in the home.

# 48-INCH BUILT-IN FRENCH DOOR REFRIGERATOR, PRE-ASSEMBLED, PROFESSIONAL DESIGN



### **OVERALL PRODUCT DIMENSIONS SIDE VIEW** 27 5/16"†(694 mm) **FRONT VIEW** 24 3/4"\* (629 mm) †Depth with handles \*Depth with 3/4" (19 mm) door panel 23 7/8"\*\* (607 mm) \*\* Depth with door (no panel) 471/4" (1200 mm) 22"\*\*\*(558 mm) \*\*\* Unit depth without door 83 1/2" 80 3/4" 83 3/8" (2121 mm) (2050 mm) (2117 mm) min. min. min. 84 3/16" 81 3/8" 84" (2138 mm) (2067 mm) (2134 mm) max. max. max. 4 13/16" (123 mm) 4" (102 mm) (229 mm) 4" (102 mm) 3/4" (19 mm)

## **INCLUDED ACCESSORIES**

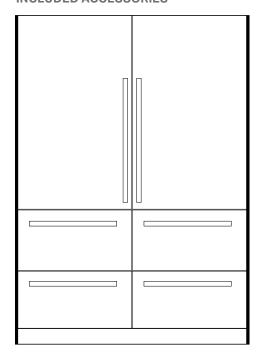

### Frame Kit (Included)

This unit can be installed in a 24" (610 mm) deep cutout with the included frame kit to cover an unfinished furniture return. The kit includes two 80" (2032 mm) brushed aluminum side trim pieces. Each trim piece is 5" (127 mm) deep with a 1/2" (13 mm) front face.