
Mera Sound Sconce™

Quick Start Guide & Wiring Diagrams

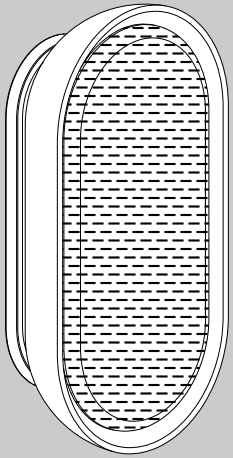

Leon®

Before Installation

⚠ Working near electrical equipment and wires poses an electrocution hazard. Turn off nearby electrical circuits from the breaker. Use a non-contact voltage tester to confirm that the installation location is free of live electrical wires and equipment prior to cutting or drilling into the wall. Contact a qualified electrician before making any modifications to electrical wiring. Consult local building and/or electrical codes prior to installation of speakers, cabling, or electrical equipment.

LIMITED WARRANTY ON COMPONENTS:

Passive Loudspeakers

Leon Speakers ("Leon") warrants to the first end-user purchaser that the Passive Loudspeakers of this Leon product ("Product"), when purchased from an authorized Leon Dealer, will be free from defective workmanship and materials for the period of five (5) years. Leon will at its option and expense during the warranty period, either repair the defect or replace the Speaker Components of this Product with new or remanufactured Speaker Components or reasonable equivalent.

Powder Coated Aluminum Outer Bowl with Lighting Assembly

Leon warrants to the first end-user purchaser that the Outer Bowl with Lighting Assembly (including the American Lighting LED Driver) utilized by the Product, when purchased from an authorized Leon Dealer, will be free from manufacturing defects from the date of shipment for a period of two (2) years. If any manufacturing defect exists in the Outer Bowl with Lighting Assembly, so long as the customer promptly notifies Leon of the defect within the warranty period and, if requested by Leon, returns the defective part(s), Leon will at its option and expense during the warranty period, either repair or replace the components with new or remanufactured components or reasonable equivalent.

Note: The Warranty will be void, and Leon will have no responsibility under this Warranty, if Leon or its representatives cannot access any Components to inspect, diagnose problems or repair Product as a result of concealment or inaccessibility of such Products or Components within a building structure. This Warranty only covers failure due to defects in materials and workmanship that occur during normal use and does not cover normal maintenance.

EXCLUSIONS:

TO THE EXTENT PERMITTED BY LAW, THE WARRANTY SET FORTH ABOVE IS IN LIEU OF, AND EXCLUSIVE OF, ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, AND IS THE SOLE AND EXCLUSIVE WARRANTY PROVIDED BY LEON. ALL OTHER EXPRESS AND IMPLIED WARRANTIES, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY, IMPLIED WARRANTY OF FITNESS FOR USE, AND IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE ARE SPECIFICALLY EXCLUDED. No one is authorized to make or modify any warranties on behalf of Leon.

The warranty stated above is the sole and exclusive remedy and Leon's performance shall constitute full and final satisfaction of all obligations, liabilities and claims with respect to the Product. IN ANY EVENT, LEON SHALL NOT BE LIABLE FOR CONSEQUENTIAL, INCIDENTAL, ECONOMIC, PROPERTY, BODILY INJURY, OR PERSONAL INJURY DAMAGES ARISING FROM THE PRODUCT, ANY BREACH OF THIS WARRANTY OR OTHERWISE. THE RIGHT TO RECOVER DAMAGES WITHIN THE LIMITATIONS SET FORTH IS YOUR EXCLUSIVE ALTERNATIVE REMEDY IF THE LIMITED REMEDY OF REPAIR OR REPLACEMENT FAILS ITS ESSENTIAL PURPOSE.

This warranty statement gives you specific legal rights, and you may have other rights which vary from state to state. Some states do not allow the exclusion of implied warranties or limitations of remedies, so the above exclusions and limitations may not apply. If your state does not allow disclaimer of implied warranties, the duration of such implied warranties is limited to period of Leon's express warranty.

Warranty Period for this Product:

This warranty begins on the date on the original sales receipt, invoice or other satisfactory proof of purchase.

Additional Limitations and Exclusions from Warranty Coverage:

The warranty described above is non-transferable, applies only to the initial installation of the Product, does not include installation of any repaired or replaced Product, does not include damage to allied or associated equipment which may result for any reason from use with this Product, and does not include labor or parts to repair damage caused by accident, mishandling, disaster, negligence, improper installation, misuse (including, but not necessarily limited to, overdriving the amplifier or speaker, exposing the Product to excessive heat or cold or humidity, direct water spray or immersion), abuse, negligence, or normal wear and tear, or from service or repair which has not been authorized by Leon. This warranty also excludes normal cosmetic deterioration caused by environmental conditions.


Obtaining Authorized Service:

To qualify for the warranty, you must contact your authorized Leon Dealer/Installer or call Leon Customer Service at (888) 213-5015 within the warranty period, obtain a return merchandise number (RMA), and deliver the Product to Leon in suitable packaging, shipping prepaid during the warranty period, together with the original sales receipt, invoice or other satisfactory proof of purchase.

New Construction Installation

Pages 4-5


New construction installations include an off-board LED driver and can be easily installed and integrated using entirely low voltage wiring. **Start by referencing the wiring diagram below and move to Page 4 for installation instructions.**

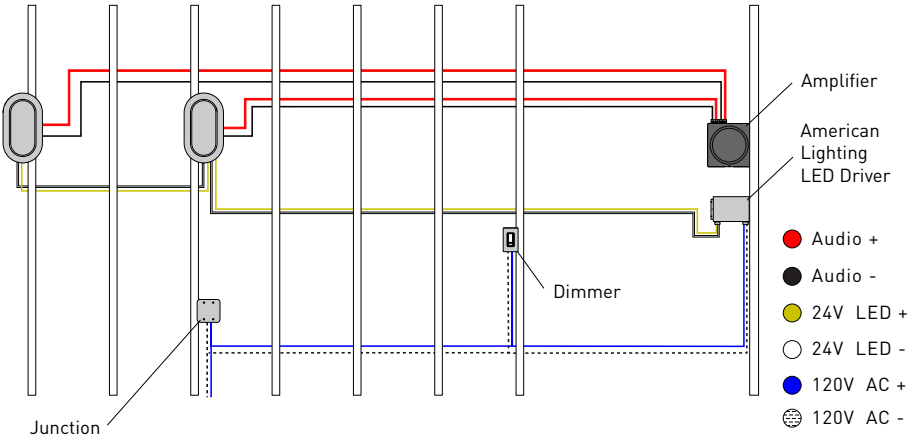


Retrofit Installation


Pages 6-7

The assembly for retrofit installations comes with an integrated LED Driver on board, allowing you to connect a high voltage wire from your pre-existing sconce box directly to the LED Driver. **Start by referencing the wiring diagram below and move to Page 6 for installation instructions.**

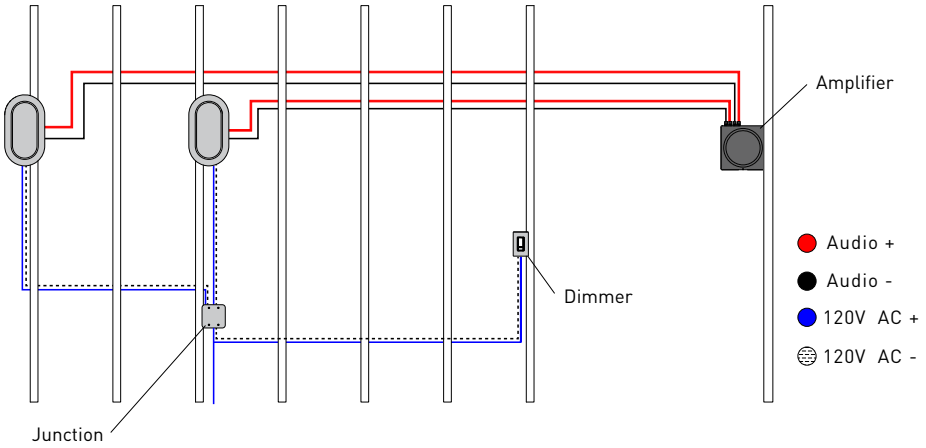


What's Included (New Construction)

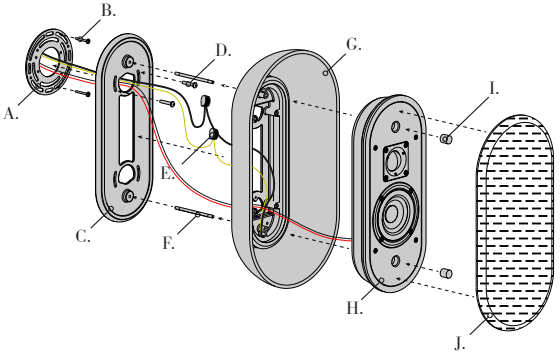





Universal Mounting Bracket (x1)




8-32 x 0.75" Machine Screws (x2)




Wall Plate (x1)




6-32 x 0.75" Machine Screws (x2)




WAGO 222 Series Wire Connectors (x2)




10-32 Threaded Stainless Studs (x2)




Outer Bowl (x1)*




Speaker Assembly (x1)



10-32 Brass Finial Nuts (x2)




Fabric Grille (x1)




LED Driver

New Construction Installation




1.

Pull wires from the single gang box through the Universal Bracket [A], then attach the bracket to the gang box using Machine Screws [B]. Next, pull wires through the top holes in the Wall Plate [C], and attach the Wall Plate to the Universal Bracket using Machine Screws [D].

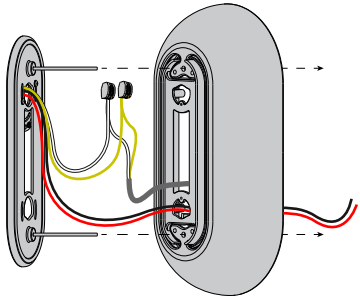


2.

Using Wire Connectors [E], connect low voltage lighting wires from the LED Driver [K] to the wires coming out of the Outer Bowl (positive to positive, negative to negative). Then seat the Outer Bowl onto the Threaded Studs [F].



3.


Connect audio wires to the terminals on the back of the Speaker [H] (positive to positive, negative to negative). Then mount the speaker into the outer bowl on the Threaded Studs [F].




4.


Attach Finial Nuts [I] to the Threaded Studs [F]. Finalize the assembly by magnetically attaching the Fabric Grille [J] to the speaker.

What's Included (Retrofit)

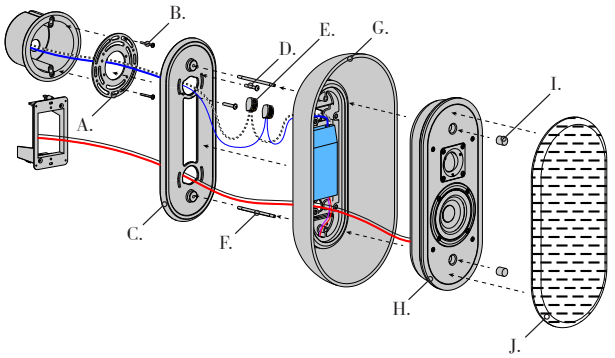





Universal Mounting Bracket (x1)




8-32 x 0.75" Machine Screws (x2)




Wall Plate (x1)




6-32 x 0.75" Machine Screws (x2)




WAGO 222 Series Wire Connectors (x2)




10-32 Threaded Stainless Studs (x2)




Outer Bowl (x1) with LED Driver



Speaker Assembly (x1)




10-32 Brass Finial Nuts (x2)



Fabric Grille (x1)


Retrofit Installation

WARNING! Working near electrical equipment and wires poses an electrocution hazard. Turn off nearby electrical circuits from the breaker before proceeding.




1.

Install a retrofit gang box below the single gang box for your speaker wire. Pull high voltage wires from the wall through the Universal Bracket [A], then attach the bracket to the gang box using Machine Screws [B]. Next, pull high voltage wires through the top holes in the Wall Plate [C] and the speaker wire through the lower holes in the Wall Plate, then attach the Wall Plate to the Universal Bracket using Machine Screws [D].




2.

Using Wire Connectors [E], connect the high voltage wires to the LED Driver within the Outer Bowl (positive to positive, negative to negative). Then seat the Outer Bowl onto the Threaded Studs [F].



3.

Connect audio wires to the terminals on the back of the Speaker [H] (positive to positive, negative to negative). Then mount the speaker into the outer bowl on the Threaded Studs [F].



4.

Attach Finial Nuts [I] to the Threaded Studs [F]. Finalize the assembly by magnetically attaching the Fabric Grille [J] to the speaker.

Questions?

For additional support, call customer service
1 (888) 213-5015 | Mon - Fri 8 am-6 pm EST

Leon

Leon is a registered trademark of Leon Speakers, Inc ©2022.
REF-25-134_Mera_Sconce_Quick_Start_Guide_20240311