


GE Zoneline® Dry Air 25 Cooling and Electric Heat Unit with Corrosion Protection, 230/208 Volt



Model# AZ45E12DAP

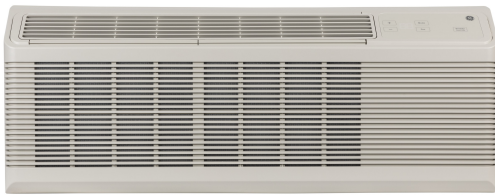

- Perfect for high humidity climates - Removes 20%-35% more moisture from the air than standard Zoneline air conditioners* (*Varies when comparing dehumidification rates of the 7,000/9,000/12,000 BTU base models to their dry air model counterparts)
- Cooling capacity - 11,200/11,100 BTU
- Energy efficiency - 11.5 EER
- Dehumidification - 4.2 pints/hour
- Indoor fan CFM (high/low) - 360/270
- Fresh air vent CFM (fully open high fan) - 47
- Quiet operation - Baked-on mastic sound barrier, cross flow blower and two DC fan motors create less noise to ensure comfort
- Corrosion resistant - Extends life of the unit in sea coast areas/corrosive environments
- Heat & Freeze Sentinels - Keeps the room from overheating or freezing
- Electronic temperature limiting - Prevents expensive over-cooling or over-heating of the room
- - Electronic touch controls with LED display
- - R-410A refrigerant
- - SMC base pan
- Simplified structure - Easy to maintain and service

Have more questions? Please contact 1-800-626-2005

FEATURES

Sensible Heat Ratio	54%
Chassis Type	Slide-In
Control Type	Coverless Backlit White LED Touch Controls
Corrosion Treated	Yes
Discharge Grille	2-position
Electronic Micro Computer Control	Yes
Fan Cycle Switch	Yes
Fan Motor	2
Fan Speed Control	Yes
Fan Speed Selections	Hi/Low Cooling; Hi/Low Fan Only; Hi/Low Heating
Filter Type	Rigid Frame; Slide-Out
Heat - Cool	Yes
Louver Style	Reversible
Manual Vent Control	Hidden
Rotary Compressor	Yes
Temperature Limiting	Electronic 7-Step
Vent Control	3-position
Dry Air	Yes
Venting Features	Concealed Manual Vent Control; Outdoor Vent Control - 3 Positions; Vent Air Filter
Zoneline Features	"Sleep" Mode; "Smart Fan" Fan Cycle Control; Auto Power Recovery; Automatic Indoor Frost Control; Central Desk Control Compatibility; Freeze Sentinel; Heat Sentinel; LCDI Power Cord (purchased separately); Proportional - Integral ID Airflow; Random Twist/Length Segment Tangential Blower; Remote Thermostat Compatibility; Universal Heaters; Weather Protected Electrical Components
Product Type	Packaged Terminal Air Conditioners (PTAC)
Temperature Range	60 - 85 F

GE Zoneline® Dry Air 25 Cooling and Electric Heat Unit with Corrosion Protection, 230/208 Volt



Model# AZ45E12DAP

APPROXIMATE DIMENSIONS (HxDxW)

- 16 in x 20 13/16 in x 42 in

CAPACITY

- Cooling BTUH (MIN) 11000.00 Btu
- Cooling BTUH (MAX) 11200.00 Btu
- Cooling EER (BTUH / Watt) 11.4/11.5
- CFM Indoor Fan High 360
- CFM Indoor Fan Low 270
- Dehumidification (pts./hr.) 4.20
- Vent CFM (high fan at zero ESP) 44

WARRANTY

- Parts Warranty - Limited 1-year entire appliance; Limited 5-year sealed refrigerating system
- Labor Warranty - Limited 1-year entire appliance; Limited 5-year sealed refrigerating system
- Warranty Notes - See written warranty for full details

Have more questions? Please contact 1-800-626-2005