

Refrigeration Equipment Reach-In Freezer, 1 Door, 25 cu.ft - Stainless Steel (R290)

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____



738279 (KCHRI25R1DFE)

1-door reach-in freezer,
stainless steel, 25 cubic feet,
R290 refrigerant gas, -8/+5°F

Short Form Specification

Item No.

1 full door freezer with door and bottom panel in 430 stainless steel, exterior back, side and top panels in prepainted steel; interior back, side, top and bottom panels in white High Impact Polystyrene. Control with cabinet temperature display. Self-closing and on-site reversible door feature with lock and key. Temperature range: - 8 °F min / 5 °F max.

R290 gas in the refrigeration circuit.
ETL Safety and Sanitation certifications.
3/5 Years warranty.

Main Features


- External temperature display.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Removable gasket for easy cleaning operations.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Back bottom mounted cooling unit guarantee an easy access and cleaning.

Construction


- Lockable door.
- Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.
- PVC shelves.

APPROVAL: _____

Front

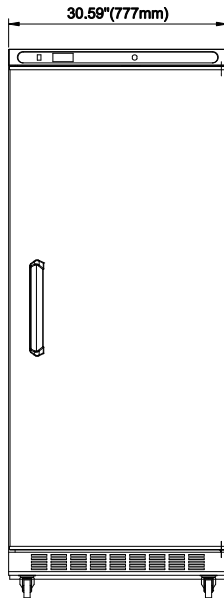


Side

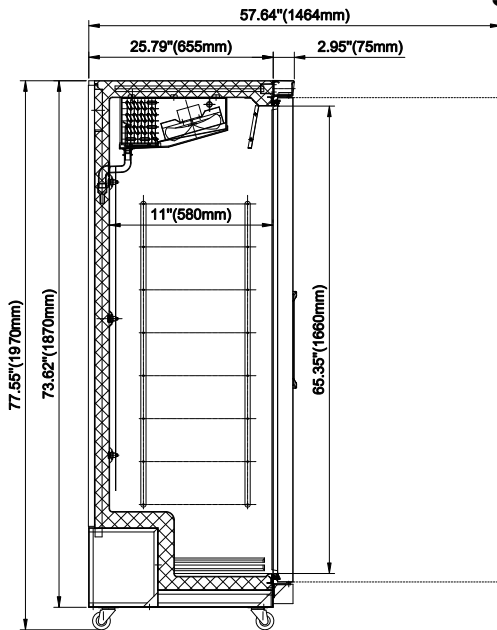

EI = Electrical connection

Top



Electric

Supply voltage:

738279 (KCHRI25R1DFE)

115 V/1 ph/60 Hz

Current consumption:

7 Amps

Plug type:

USA NEMA 5-15P

Key Information:

Door hinges:

Right Side

Capacity (Cu. Ft.)

25

External dimensions, Width:

30 9/16" (776.99 mm)

External dimensions, Depth:

28 3/4" (730 mm)

External dimensions, Height:

77 9/16" (1970 mm)

Number and type of doors:

1 ; Full

Number and type of grids (included):

3 - Vinyl-Coated steel

Type of external material:

Prepainted Steel

Type of internal material:

White Polystyrene

External Door material:

430 AISI

Warranty:

3 / 5 years

External door material:

Stainless Steel

Refrigeration Data

Compressor Horsepower:

1/6

Refrigerant type:

;R290

Operating temperature min.:

-7.6 °F

Operating temperature max.:

5 °F

Condenser type:

Fin & tube

Defrost type:

auto defrost