PRO

TORNADO II

INSERT

ZEPHYR

ZEPHYRONLINE.COM

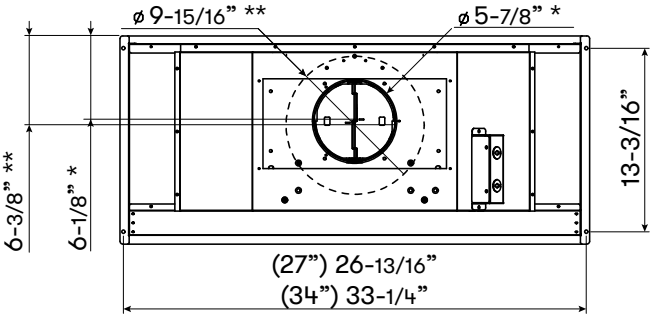

TOP

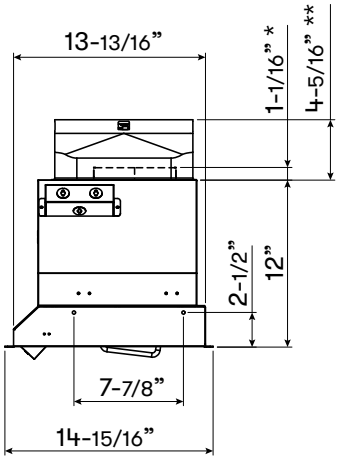

SIDE

Optional Wireless Remote Control

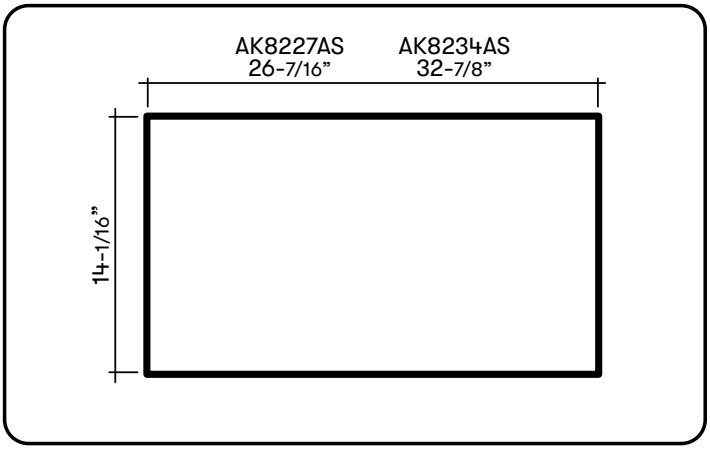

Cabinet Bottom Cut-Out Size (W x D):
26-7/16" x 14-1/16" (AK8227AS), 32-7/8" x 14-1/16" (AK8234AS)

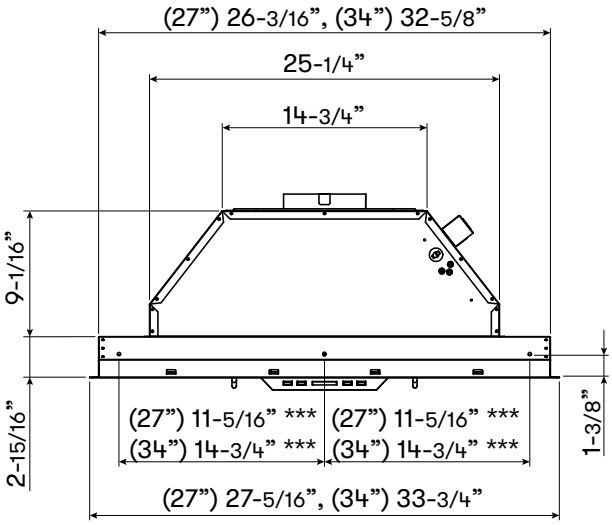

FRONT

* 6" Round Ducting
** 10" Round Ducting
*** Mounting holes measurements from rear

ZEPHYR

ZEPHYRONLINE.COM

MODEL		
Stainless Steel	AK8227AS	AK8234AS
Size	30” (27-5/16” x 14-15/16”)	36” (33-3/4” x 14-15/16”)
BLOWER PERFORMANCE		
Included Single Blower	200 - 600 CFM, 1 - 6 sones	200 - 600 CFM, 1 - 6 sones
ACT 390	200 - 390 CFM, 1 - 4 sones	200 - 390 CFM, 1 - 4 sones
ACT 290	200 - 290 CFM, 1 - 3 sones	200 - 290 CFM, 1 - 3 sones
Optional Dual Blower	500 - 1000 CFM, 3.5 - 8 sones	500 - 1000 CFM, 3.5 - 8 sones
FEATURES		
Controls	Electronic LCD	Electronic LCD
Speed Levels	5	5
Auto Delay-Off	Yes	Yes
Lighting	LumiLight LED with TruHue™, 6Wx2	LumiLight LED with TruHue™, 6Wx2
Dual-Level Lighting	Yes	Yes
TruHue™	Yes	Yes
Filters	Pro Baffle x2	Pro Baffle x2
Wireless Remote Control Option	Yes, RF	Yes, RF
Dual Internal Blower Option	Yes	Yes
Recirculating Option	No	No
ADA Compliant	Yes (with remote accessory)	Yes (with remote accessory)
DUCT SPECIFICATIONS		
Vertical Single Internal Blower	6” Round	6” Round
Vertical Dual Internal Blower	10” Round	10” Round
AC POWER		
Single Blower	120V, 60Hz at Max. 3A	120V, 60Hz at Max. 3A
Dual Blower	120V, 60Hz at Max. 6A	120V, 60Hz at Max. 6A
OPTIONAL ACCESSORIES		
Dual Internal Blower Kit	PBD-1000A	PBD-1000A
36” Liner (17-3/8” - 19-5/8” Depth)	AK082360AS	NA
Wireless Remote Control	RC-0002	RC-0002
MOUNTING HEIGHT RANGE*	24” - 36”	24” - 36”
WARRANTY	3 years parts, 1 year labor	3 years parts, 1 year labor

*Mounting height refers to distance between top of a 36” tall cooking surface and bottom of hood.

ACT™ **Airflow Control Technology™ (ACT™)**
is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.

TruHue™
A bright idea: customize your hood’s light to harmonize with the rest of your kitchen’s lighting at the touch of a button—from 2700K, 3000K, 3500K, 4000K to 5000K.

Specifications subject to change, check zephyronline.com for up-to-date information.
Zephyr Ventilation | 2277 Harbor Bay Parkway, Alameda, CA 94502 | 888.880.VENT

JAN26.0101

c UL us