

# **SPECIFICATIONS** P10 SERI **RANGE HOODS**

## **Professional Series Range Hood**

#### **Hood Dimensions**

Overall bottom projection - 24" Available height (without Soffit) -10" Available widths: 30" and 36"

#### Hood

Stainless steel. Wall mounted, Install at least 24" above the cooking surface.

#### **Thermostat**


Thermostat detects when the heat level rises to an excessive amount and automatically turns the hood on.

#### Lighting

2 - PAR16, 3.125" in length, type A screw-in base, 45 watt maximum Halogen lamps (included).

#### **Heat Lamps** (model P1036W)

2 - type R40, medium base IR 250W (not included).

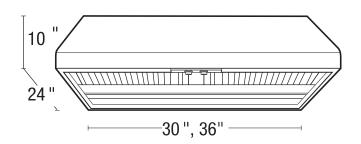

#### **Ducting Options**

Vertical outlet only. Vertical or Horizontal ducting transition achieved through vertical or horizontal duct adapter (available separately) specified for size of motor.

#### **Filters**

Grease Baffles: Dishwasher safe, Stainless Steel baffles (included).

### **BLOWERS SOLD SEPARATELY**

Model	Description	Width	Height
P1030	Range Hood	30"	10"
P1036	Range Hood	36"	10"
P1036W	Range Hood w/Heat Lamps	36"	10"

POWER USAGE						
	30"		36"		36" w/Heat Lamps	
Motor Size	Full Load Amps	Breaker Size	Full Load Amps	Breaker Size	Fu <b>ll</b> Load Amps	Breaker Size
300 CFM	1.7 amps	15 amp	1.7 amps	15 amp	5.9 amps	15 amp
500 CFM	1.9 amps	15 amp	1.9 amps	15 amp	6.1 amps	15 amp
600 CFM	2.1 amps	15 amp	2.1 amps	15 amp	6.3 amps	15 amp
900 CFM	6.5 amps	15 amp	6.5 amps	15 amp	10.7 amps	15 amp
1200 CFM	8.0 amps	15 amp	8.0 amps	15 amp	12.2 amps	20 amp

Breaker Size is listed at the recommended minimum size. Installation must be in accordance with all applicable

PROJECT							ARCHITEC	т		
LOCATION			ENGINEER							
CONTRACTOR			SUBMITTED BY DATE							
FAN NUMBER 1	MODEL NUMBER	CFM	IN W.C.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS	



Specifications subject to change without notice.



U.S.: 820 Lincoln Avenue West Chester, Pennsylvania 19380-4466 Tel: (610) 692-7400 • 877-304-3785

Fax: (610) 696-8048

Canada: 8 Edvac Drive Brampton, Ontario L6S 5P2 Tel: (905) 456-2033 • 800-250-8767 Fax: (905) 456-1015

Updated 5-12