

ASOLA

PINAS428SS, PINAS422SS

Don's Appliances

Exceptional Brands and Service Since 1971




Designed for discreet installation within cabinetry, providing a precise fit for 12" deep cabinetry and a width of 28" or 22".

Featuring a 400 CFM blower, Asola is highly capable of fulfilling diverse cooking needs. Its user-friendly Backlit Electronic Push Button Controls effortlessly operate the 3-speed blower and LED lighting.

MOUNTING HEIGHT RANGE

 $\geq 24"$  $\geq 30"$

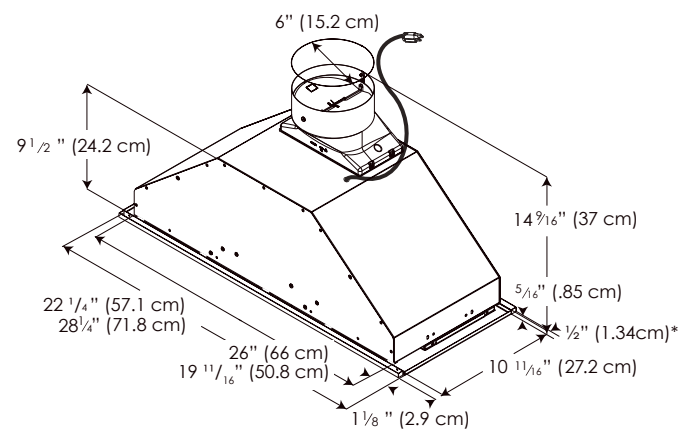

* Stainless Steel Spacers must be installed and used when cabinet depth is greater than 12"

SPECIFICATIONS

Width:	28" Unit	22" Unit
Model:	PINAS428SS	PINAS422SS
Dimensions:	28 1/4"W x 10 3/4"D x 9 1/2"H	22 1/4"W x 10 3/4"D x 9 1/2"H
Blower Type(internal):**	400 CFM(3-speed)	400 CFM(3-speed)
Noise (sones):**	0.5 - 5.9 Sones	0.5 - 5.9 Sones
Finish:	Stainless Steel	Stainless Steel
Controls:	Backlit Electronic Push Buttons	Backlit Electronic Push Buttons
Illumination: (replaceable lamps 1 intensity)	2 LED, 2.1 Watts 4000 KELVIN 235 LUMEN/Lamp	2 LED, 2.1 Watts 4000 KELVIN 235 LUMEN/Lamp
Grease Filter:	(2)Dishwasher-Safe, Anodized Aluminum Mesh Filter	(2)Dishwasher-Safe, Anodized Aluminum Mesh Filter
Duct Transition:	6" Round with Backdraft Damper (top only)	6" Round with Backdraft Damper (top only)
Installation Type:	Ducted or Recirculating with Kit	Ducted or Recirculating with Kit
Mounting Height Range:	Electric ≥ 24", Gas ≥ 30"	Electric ≥ 24", Gas ≥ 30"
Electrical:	120V - 60 Hz, 289 Watts	120V - 60 Hz, 289 Watts
ACCESSORIES:		
Hood Liner for 36":	ACC02774 (35" x 17 1/2" - 20 1/2" D x 4" H)	Not Available
Hood Liner for 30":	ACC02773 (29" x 17 1/2" - 20 1/2" D x 4" H)	Not Available
Recirculating Kit:	ACC02770 (Contains 2 round carbon filters & cabinet grate)	
CFM Reduction:	ACC0175561 (achieves <300 CFM)	
WARRANTY:	Two (2) years parts & in-home labor	

PLUS FEATURES



Aluminum mesh filters are a cut above the competition, featuring a triple-layered design of anodized aluminum woven into a highly dense mesh, capturing more grease and resisting staining.



LED LIGHTING - High Quality LED with 20,000 hours of lifespan allows a significant energy saving.

*The product images shown are for illustration purposes only and may not be an exact representation of the product.

**CFM and Noise data indicate the performance of the hood blower tested according to international standards. For AHAM Certified Ratings, established in accordance with California Title 24 Standardized test procedure, please refer to AHAM Certified Product Directory. Electric Ratings are declared according to UL.



ASOLA

PINAS428S1, PINAS422S1

Don's Appliances

Exceptional Brands and Service Since 1971




Designed for discreet installation within cabinetry, providing a precise fit for 12" deep cabinetry and a width of 28".

Featuring a 400 CFM blower, Asola is highly capable of fulfilling diverse cooking needs. Its user-friendly Backlit Electronic Push Button Controls effortlessly operate the 3-speed blower and LED lighting.

MOUNTING HEIGHT RANGE

$\geq 24"$ $\geq 30"$

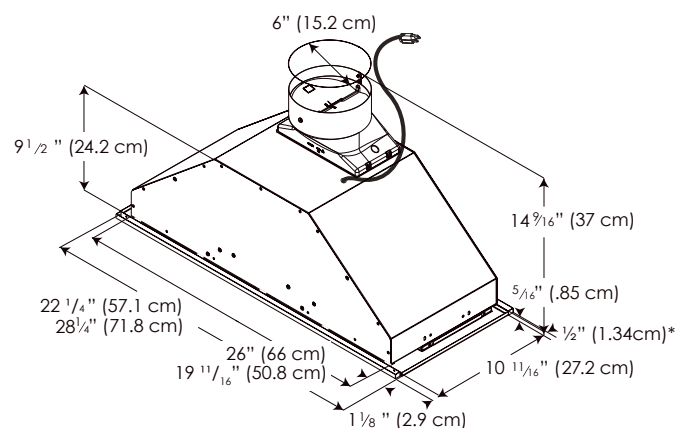

* Stainless Steel Spacers must be installed and used when cabinet depth is greater than 12"

SPECIFICATIONS

Width:	28" Unit	22" Unit
Model:	PINAS428S1	PINAS422S1
Dimensions:	28 1/4"W x 10 3/4"D x 9 1/2"H	22 1/4"W x 10 3/4"D x 9 1/2"H
Blower Type(internal):**	400 CFM(3-speed)	400 CFM(3-speed)
Noise (sones):**	0.5 - 5.9 Sones	0.5 - 5.9 Sones
Finish:	Stainless Steel	Stainless Steel
Controls:	Backlit Electronic Push Buttons	Backlit Electronic Push Buttons
Illumination: (replaceable lamps 1 intensity)	2 LED, 2.1 Watts 4000 KELVIN 235 LUMEN/Lamp	2 LED, 2.1 Watts 4000 KELVIN 235 LUMEN/Lamp
Grease Filter:	(2)Dishwasher-Safe, Anodized Aluminum Mesh Filter	(2)Dishwasher-Safe, Anodized Aluminum Mesh Filter
Duct Transition:	6" Round with Backdraft Damper (top or rear)	6" Round with Backdraft Damper (top or rear)
Installation Type:	Ducted or Recirculating with Kit	Ducted or Recirculating with Kit
Mounting Height Range:	Electric ≥ 24", Gas ≥ 30"	Electric ≥ 24", Gas ≥ 30"
Electrical:	120V - 60 Hz, 289 Watts	120V - 60 Hz, 289 Watts
ACCESSORIES:		
Hood Liner for 36":	ACC02774 (35" x 17 1/2" - 20 1/2" D x 4" H)	Not Available
Hood Liner for 30":	ACC02773 (29" x 17 1/2" - 20 1/2" D x 4" H)	Not Available
Recirculating Kit:	ACC02770 (Contains 2 round carbon filters & cabinet grate)	
CFM Reduction:	ACC0175561 (achieves <300 CFM)	
WARRANTY:	Two (2) years parts & in-home labor	

PLUS FEATURES



Aluminum mesh filters are a cut above the competition, featuring a triple-layered design of anodized aluminum woven into a highly dense mesh, capturing more grease and resisting staining.



LED LIGHTING - High Quality LED with 20,000 hours of lifespan allows a significant energy saving.

*The product images shown are for illustration purposes only and may not be an exact representation of the product.

**CFM and Noise data indicate the performance of the hood blower tested according to international standards. For AHAM Certified Ratings, established in accordance with California Title 24 Standardized test procedure, please refer to AHAM Certified Product Directory. Electric Ratings are declared according to UL.

