

# STU1822



Product Family	Dishwashers
Commercial width	45 cm
Commercial height	82 cm
Installation	Fully-integrated built-in
Kitchen panel	Not supplied
N° baskets	2
Motor	Inverter
EAN code	8017709344177



## Programs



N. of programmes	6	Super	Yes
Washing temperatures	45, 50, 55, 65 °F	Regular	Yes
Delicate	Yes	Intensive 65°	Yes
Auto	Yes	Rinse	Yes

## Options



Hi-Temp	Yes	Delay timer option	Up to 24 hours
Extra Fast	Yes	Extra dry option	Yes
Sanitize	Si	1/2 load FlexiZone	Yes
Silent	Si	option	

## Baskets

Basket colour	Grey	Height adjustment of the upper basket	On two levels (5cm)
Basket components colour	Grey	Lower Basket	With 2 foldable racks
Handle	In plastic on upper and lower basket	Colour Inner Components	Grey
Upper Basket	With 2 foldable racks	Cutlery basket	Yes

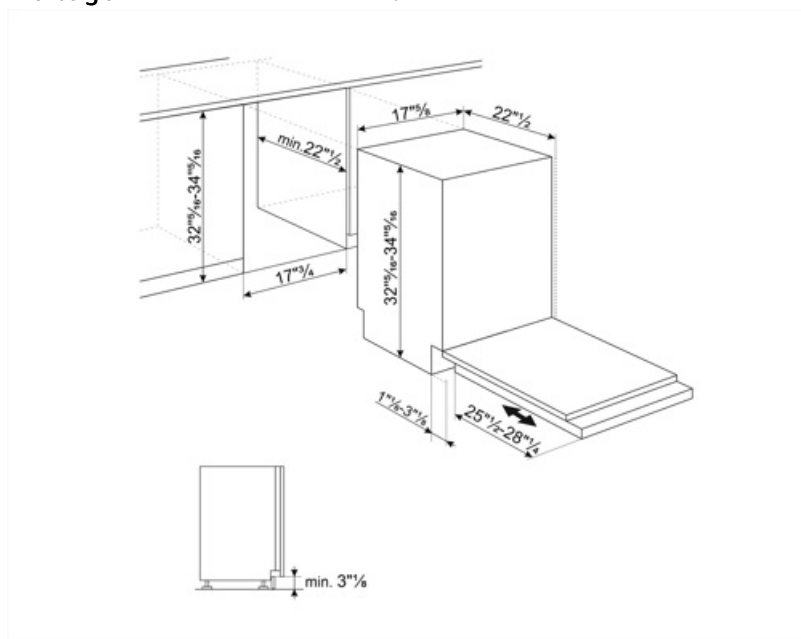
## Technical Features



<b>Width (mm)</b>	17 5/8 "	<b>End of cycle indicator</b>	On display, with acoustic signal
<b>Depth (mm)</b>	21 5/8 "	<b>Washing system</b>	Standard
<b>Display type</b>	LED display (3 digit)	<b>Turbidity sensor</b>	Yes
<b>Product Height (mm)</b>	32 5/16 "	<b>Aquatest</b>	
<b>Controls</b>	Electronic	<b>Drying system</b>	Natural condenser drying
<b>Display</b>	Delayed start, Programme time indicator	<b>Tube material</b>	Stainless steel
<b>Programme graphics</b>	Written in EN	<b>Filter</b>	Stainless steel
<b>On/off indicator</b>	Yes	<b>Concealed heating element</b>	Yes
<b>Rinse aid indicator</b>	Light	<b>Adjustable feet</b>	5cm, from 820 to 870 mm
		<b>Back feet adjustable from front</b>	Yes

## Electrical Connection

<b>Plug</b>	(B) NEMA 5-15P	<b>Frequency (Hz)</b>	60 Hz
<b>Connected power</b>	1400 W	<b>Type of connection</b>	Single-phase
<b>Current</b>	12 A	<b>Power supply cable length</b>	116 "
<b>Voltage</b>	120 V		



---

## Compatible Accessories

---



### KITPL60B

Toekick Kit in White colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.



### KITPL60N

Toekick Kit in Black colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.



### KITPL60X













Toekick Kit in Stainless Steel with adjustable height and deepness. Can be fitted over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.



### KITPLV2

Kit extension for dishwasher and washing machine: lenght mt. 2

## Symbols glossary

	The Aquatest sensor is an electronic sensor that measures the degree of water transparency at the end of the initial soaking phase. Used on the values measured, the sensor sets the most suitable programme, thus obtaining the best washing results with the minimum amount of water.		82 cm high
	Delay Timer: Option to postpone the start of the desired programme by up to 24 hours in order to programme the dishwasher to run at the desired time.		FlexiZone: The ½ load flexizone allows you to wash a reduced load saving energy, water and time and there are no restrictions on where the items are placed.
	Smeg's evolution towards more intelligent and eco-friendly models has led to the choice of Inverter technology, which significantly reduces consumption.		Noise Level: Excellent insulation and special devices keep noise to a minimum.
	Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled.		Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled.
	PRG_RINSE_72dpi		PRG_STRONG_72dpi
	EXTRA DRY This option adds a hot rinse cycle that ensures improved drying.		The Regular programme is for dishes with regular dirt, even with dried-on residues.