

HR 1422-3 I  
30 inch range  
in all AllElectric design.



- 7-segment display with rotary selector – Direct Select
- Latest cooktop technology – four induction cooking zones
- Rapid heating and even heat distribution – TwinPower
- Minimal cleaning effort – Pyrolytic cleaning
- Easy opening & closing, door with noise & vibration absorbers

EAN: 4002516755906 / Material number: 12298850 / Old Material Number: 25142281USA

Heating type	
All electric	•
Cooktop	Induction
Construction type	
Range	•
Appliance width in inches	30
Operating modes	
Maxi Broil	•
Convection Bake	•
Convection Roast	•
Surround	•
Bake	•
Convection Broil	•
Design	
Colour	CleanTouch Steel
Oven display	EasyControl
Convenience features – oven and speed oven	
Precise temperature regulation in °C	75-575°F
Cooktop features	
Heating type	Induction
Number of induction cooking zones	4
Cooking zones with Booster function	4 cooking zones
Cooking zones with TwinBooster	2 cooking zones
Power level display	1 - 9
Cooking zones with Keeping warm function	4 rings
Variable cooking zones	4 rings
Residual heat indicator	•
User convenience	
Metal knobs	•
Safety shut-off	•
Time-of-day display	•
Timer	•
Programmable cooking duration	•
Individual settings	•
Appliance door	
CleanGlass door	•
Door contact switch	•
SoftClose oven door	•
Oven cavity	
Oven capacity in l	4.59 (130) ft <sup>3</sup> (l)
Number of oven shelf levels	6
Number of halogen lights	double
TwinPower Convection Fans	•
Cleaning convenience	
Stainless steel front with partial CleanTouch Steel finish	•
Self Clean oven	•
Unheated catalyzer	•
Catalyzer	Unheated
Cooktop surface	Ceramic surface

HR 1422-3 I  
30 inch range  
in all AllElectric design.



EAN: 4002516755906 / Material number: 12298850 / Old Material Number: 25142281USA

## Safety

Appliance cooling system with touch-cool fronts	•
Safety shut-off	•
System lock	•
Door contact switch	•
Door lock during SelfClean	•


## Technical data

Appliance height in mm (min.)	35 5/8 (902)
Dimensions in mm (depth) with bullnose	27 3/4 (702)
Appliance height in mm (max.)	37 1/8 (940)
Appliance width in mm	30 (762)
Voltage in V	120
Fuse rating in A	50
Number of phases	1

## Accessories supplied


Self Clean ready wire rack	1
Self Clean ready wire rack with rail system	1
Self Clean ready side racks	1

## HR 1422-3 I 30 inch range in all AllElectric design.

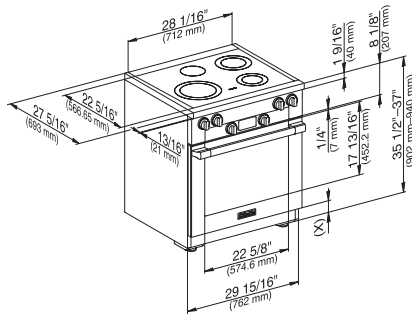


HR1421, HR1421-3, HR1422-3 i (installation drawing)

E = Electric connection

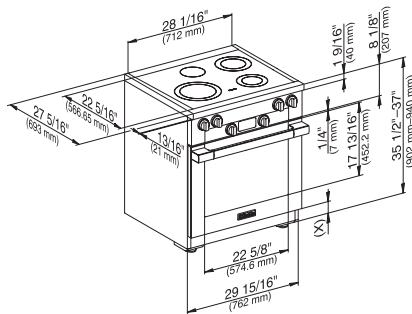


HR1421-3, HR1422-3i (installation drawing)

(x) = Toe-kick height adjustment 5" - 6 1/2" (127 mm - 165.1 mm)

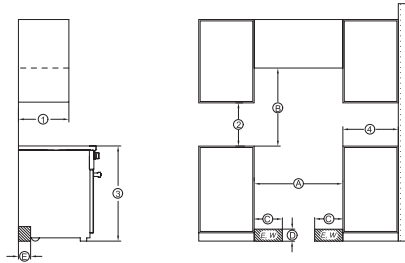


HR1421, HR1622, HR1622-2, HR1421-3, HR1422-3i,  
HR1622-3i - Installation drawing

Maximum depth of top cabinet , Minimum distance to bottom edge of top cabinet , Distance from the floor to cooktop surface , Minimum distance to combustible surfaces , , E = Electric connection , W = Water connection , (A) Width of cabinet opening , (B) Minimum distance between the top of the cooking area and the bottom of an unprotected combustible surface., Minimum distance to a protected combustible surface or when a Miele Ventilation Hood is installed. For all other, Hoods please consult the manufacturer's specifications for required distances., (C) Maximum connection width right and left , (E) Maximum connection height

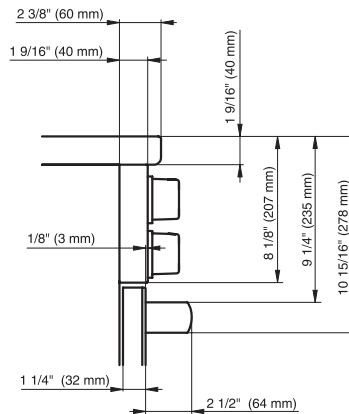

HR1421-3, HR1422-3i (installation drawing)

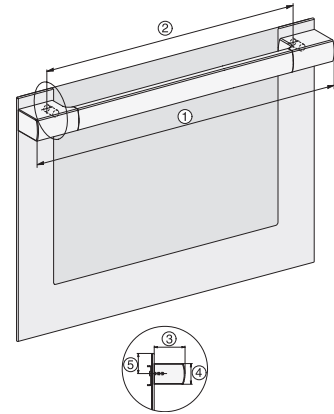

HR11xx-3, HR14xx-3, HR16xx-3i, HR17xx-3,  
HR19xx-3 installation drawings

30", 20 3/4" / 527,6 mm, 16 5/8" / 422,6 mm, 2 1/2" / 64 mm, 1 11/16" / 43 mm, 1 11/16" / 42,5 mm, , 36", 28 9/16" / 725 mm, 22 5/8" / 575 mm, 2 1/2" / 64 mm, 1 11/16" / 43 mm, 1 11/16" / 42,5 mm