



Color Variants

AL400792
stainless steel
Width 90 cm

AL400792
Retractable Downdraft ventilation 400 series
stainless steel
Width 90 cm
Air extraction / Air recirculation
Motorless

Extendable table ventilation, when not in use can be completely lowered into the worktop
Dimmable, neutral white surface LED light for ideal illumination of the whole cooktop
Precision crafting of 3 mm stainless steel
For surface mounting with a visible edge or for flush mounting
Motorless, can be combined with Gaggenau BLDC remote fan units

Output

Power levels depend on the remote fan unit, see table on page XX.

Features

3 electronically controlled power levels and 1 intensive mode.
Interval ventilation, 6 min.
Run-on function, 6 min.
Grease filter saturation indicator.
Neutral white surface LED light (3600 K), continuously dimmable.
Lamp output 4 x LED 6medium power 5W stripe.
Illuminance 200 lx.

Consumption data

Planning notes

Refer to the table on page XX for the matching remote fan units for air recirculation or air extraction mode.
Operation of Vario cooking appliances only possible without appliance cover.
Max. output of cooktops 18 kW.
The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.
The remaining surface of the worktop (min. 50 mm) between the cut-outs must be reinforced with a support. It is recommended to use furniture support AA 409 401/431.
Additional instructions for flush mounting:
Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.
When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the hood's power supply line needs to feature a suitable safety switch.


Connection

Total connected load 65 W.
100 - 120 V / 60 Hz.
Total amps: 10 A.
Connecting cable 1.8 m with plug.
Network cable 1.2 m.

Product Features
Operating Mode
Convertible: Ducted / Recirculating
Number of speed settings
Delay Shut off modes
6
Silence level
Required accessories
Optional accessories
AA400510
Number of lights
4
Type of lamps used
LED
Total power of the lamps
20
Grease filter material
Washable stainless steel
Grease filter type
Multilayer cassette
Clean filter reminders


Consumption and connection features

2022-04-15
Page 1

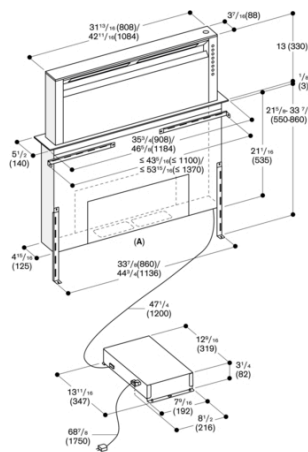


A: Flexible connection of the hood at the front, the back, or at the bottom

Measurements in inches (mm)

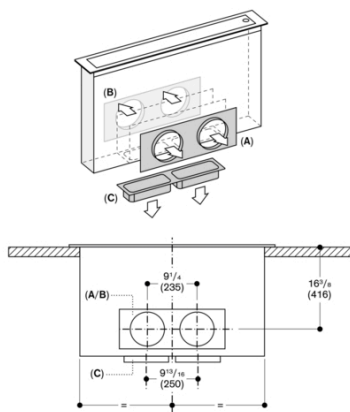


A: Connection at the front with AD 754 049
B: Connection at the back with AD 754 049
C: Connection at the bottom with AD 854 050

Measurements in inches (mm)

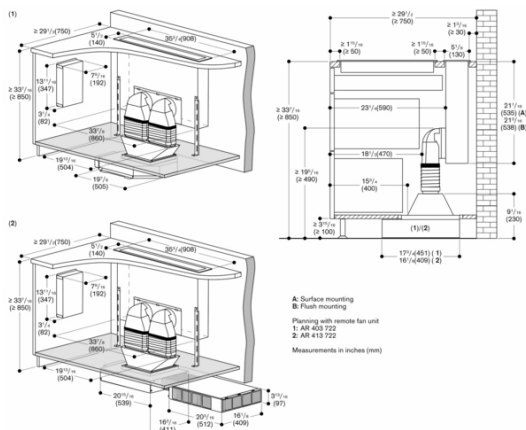


A: Surface mounting
B: Flush mounting
C: Planning with remote fan unit
1: AR 403 722
2: AR 413 722

Measurements in inches (mm)

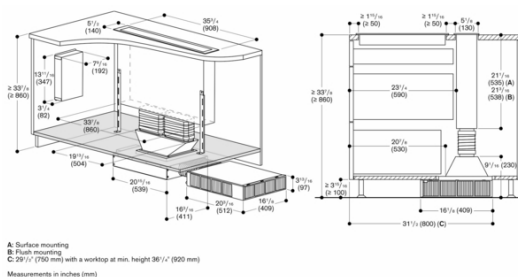


A: Surface mounting
B: Flush mounting
C: 29 1/2\"/>

Measurements in inches (mm)

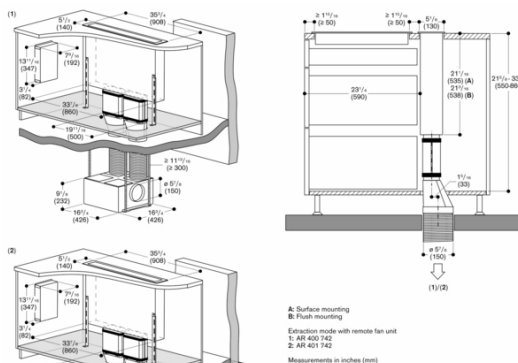


A: Surface mounting
B: Flush mounting
C: Extraction mode with remote fan unit
1: AR 403 742
2: AR 401 742

Measurements in inches (mm)

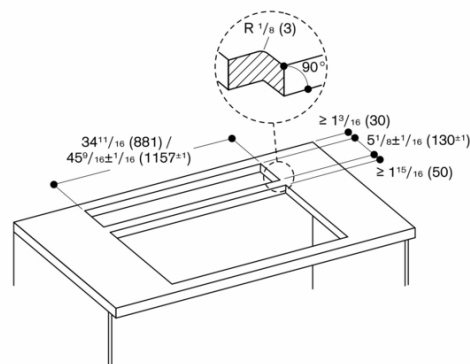


Measurements in inches (mm)

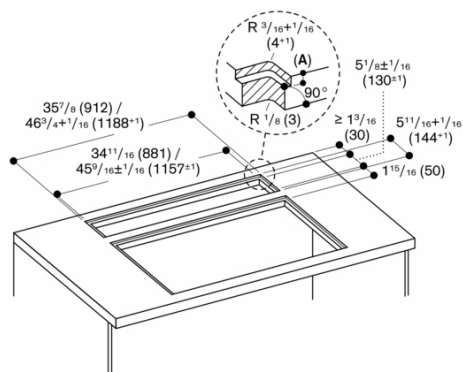

A: $\frac{1}{8}$ " (3.5^{±0.5} mm)


Measurements in inches (mm)

View from above

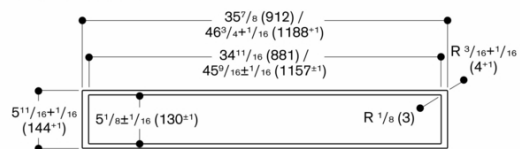

Measurements in inches (mm)

Cross-section

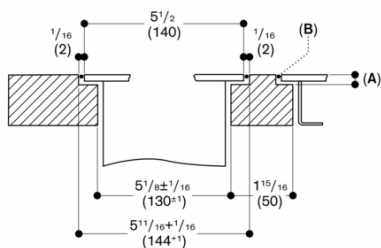


A: $\frac{1}{8}$ " (3.5^{±0.5} mm)

B: Fill with silicone

Measurements in inches (mm)


Longitudinal section

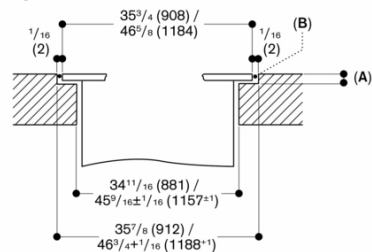

A: $\frac{1}{8}$ " (3.5^{±0.5} mm)

B: Fill with silicone

Measurements in inches (mm)

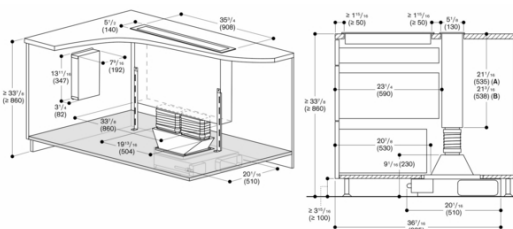

A: Surface mounting
B: Push mounting
Measurements in inches (mm)