

PD900DP

GE Profile™ 30" Drop-In Electric Range

Dimensions and Installation Information (in inches)

KW Rating	
240V	11.6
208V	8.7
Breaker Size	
240V	40 Amps
208V	40 Amps

Note: Cabinets installed adjacent to slide-in ranges must have an adhesion spec of at least 194° temperature rating.

Note: To reduce possibility of scorching the side walls above the countertop when no load is present on burners, it is recommended that a minimum of 6" spacing from adjacent side wall be allowed for possible extended, high-heat, element operation.

IMPORTANT: 30" DROP-IN RANGES ARE DESIGNED TO HANG FROM THE COUNTERTOP. IT DOES NOT REST ON THE FLOOR. FOR INSTALLATION ALTERNATIVES, REFER TO INSTALLATION INSTRUCTIONS PACKED WITH PRODUCT.

Optional Kits For Drop-In Electric Ranges (Available At Additional Cost)

Accessory Backguards

(Attaches to the back of range as a backguard when unit is installed in 30" free-standing cutout)

JXS32SS (Stainless) - 4" High

JXS32WW (White) - 4" High

JXS32BB (Black) - 4" High

JXS37WW (White) - 5-1/4" High

JXS37CC (Bisque) - 5-1/4" High

JXS37BB (Black) - 5-1/4" High

Rear Filler Strip

WB07T10680 - Black Filler Strip Assembly

WB07T10681 - White Filler Strip Assembly



WB07T10682 - Bisque Filler Strip Assembly

Installation information: Before installing, consult installation instructions packed with product for current dimensional data.

For answers to your Monogram®, GE Profile™ or GE® appliance questions, visit our website at geappliances.com or call GE Answer Center® service, 800.626.2000.



imagination at work

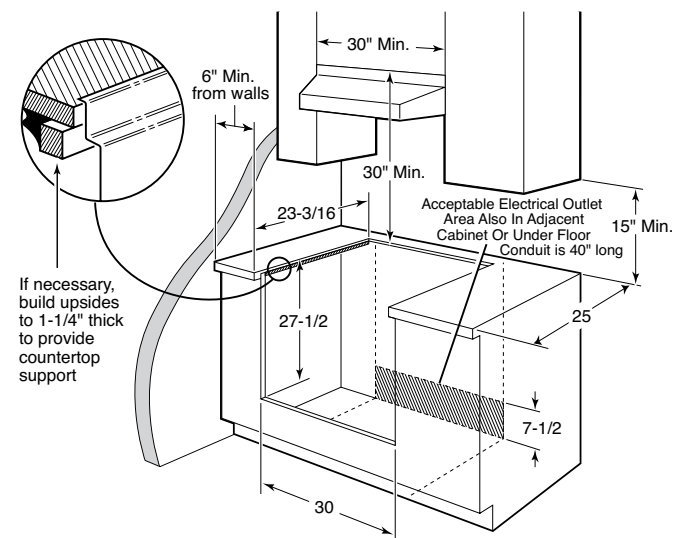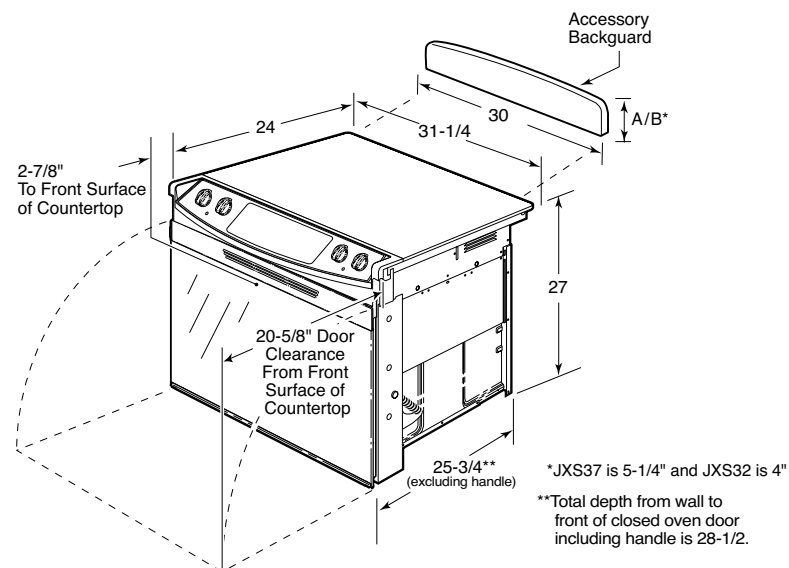

Above illustration intended for dimensional reference only. Refer to photograph for actual product appearance.



All GE ranges are equipped with an Anti-Tip device. The installation of this device is an important, required step in the installation of the range.



Listed by Underwriters Laboratories



Specification Revised 6/11


220804

PD900DP

GE Profile™ 30" Drop-In Electric Range

Features and Benefits

- Ceramic glass cooktop - A smooth cooktop surface makes cleaning quick and easy
- Electronic oven controls - Electronic pads on the control panel are easy to operate with just a touch
- Dual element - Choose a ribbon heating element to accommodate the size of your pan
- Extra-large oven capacity - Enough room to cook an entire meal at once
- TrueTemp™ oven system - This feature helps ensure the temperature you set is the temperature you get, with less variance, to give you the baking and broiling performance you desire
- Ribbon heating elements - Powerful heat beneath the smooth surface provides high-speed warm-up and even heating
- Ceramic glass cooktop - A smooth cooktop surface makes cleaning quick and easy
- Six-pass bake element - One continuous heating element delivers even heating, unparalleled baking and evenly cooked food
- Warm mode - Helps keep just-cooked foods warm and at the ideal serving temperature
- Two oven racks - Includes two oven racks that are sturdy and reliable
- Proof Mode - Gently circulate 100°F air allows dough to rise quickly and efficiently
- Model PD900DPWW - White on white (white door and solid black cooktop)
- Model PD900DPCC - Bisque on bisque (bisque door and solid black cooktop)
- Model PD900DPBB - Black on black (black door and solid black cooktop)

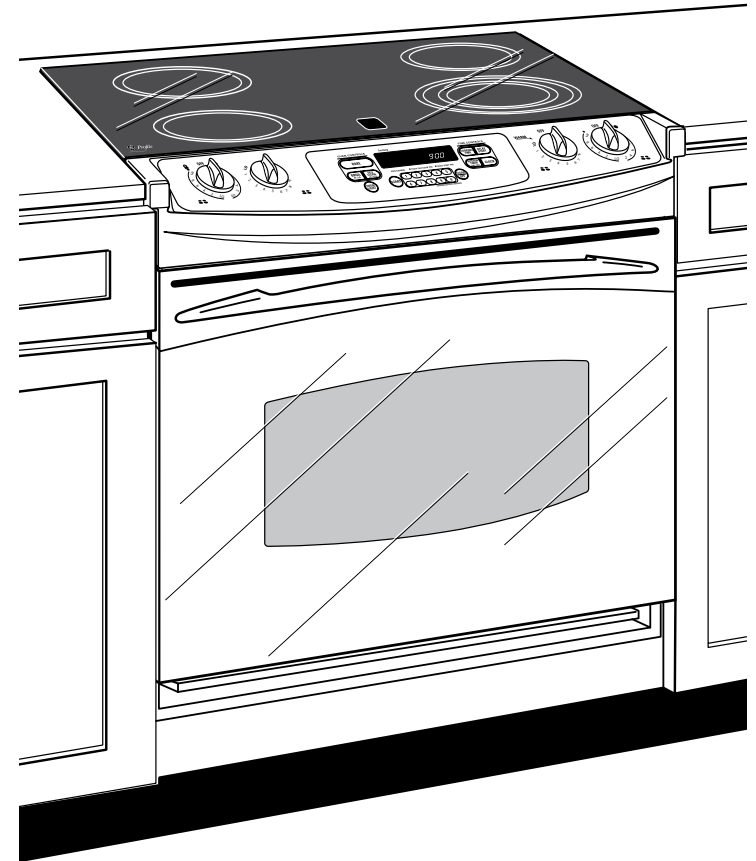

imagination at work