

# DLE3420W/ DLG3421W

## 7.4 cu. ft. Ultra Large High Efficiency Control Dryer™, Electric Dryer

7.4 cu.ft. Capacity

AI Dry

Sensor Dry

FlowSense™ Duct Clogging Indicator

Aluminized Alloy Steel Drum

LoDecibel™ Quiet Operation



### AVAILABLE COLORS



WHITE



### SUMMARY

Type	Front Load Dryer
Vent Type	Vented
Dryer Type	Electric / Gas
Capacity	7.4 cu. ft.
Matching Washer	WM3420CW
Sensor Dry	Yes
Steam	No
Colors	White (W)

### DRYER PROGRAMS

No. of Programs	10
	Normal, Heavy Duty, Bedding, Towels, Perm. Press, Delicates, Quick Dry (Manual Dry) AI Dry, Downloaded
No. of Options	7
	Wrinkle Care, Energy Saver, Remote Start, Signal, Control Lock, Wi-Fi, Damp Signal
Temperature Setting	High, Med. High, Medium, Med. Low, Low
Drying Levels	Very, More, Normal, Less, Damp
Manual Dry Times	60 min., 50 min., 40 min., 30 min., 20 min.

### APPEARANCE

Control & Display	Electronic Control Panel with LED Display
Touch Buttons	Yes
Dial-A-Cycle®	Yes
<b>FABRIC CARE FEATURES</b>	

AI Sensor Dry

Sensor Dry

Precise Temperature Control with Variable Heater

Precise Temperature Control with Variable Compressor

Steam

### CONVENIENCE FEATURES

3 Minute Installation Check	Yes
End of Cycle Signal	Yes
Drum Light (door open)	No
Reversible Door	Yes
FlowSense® Duct Clogging Indicator	Yes
Wrinkle Care Option	Yes
Control Lock	Yes
Venting Option	Electric: 4 Way Venting Gas: 3 Way Venting
4 Adjustable Legs	Yes
Remaining Time Display/ Status Indicator(s)	Yes

### SMART FEATURES (ThinQ® TECHNOLOGY)

Smart Diagnosis (v3.0)	Yes
Wi-Fi	Yes
NFC Tag On Technology	No
ThinQ Care (Remote Start/ Cycle Monitor)	Yes
Energy Monitoring	Yes

### ENERGY

ENERGY STAR® Certified	Yes
CEF	Electric: 3.94 Gas: 3.49

### MATERIALS

Aluminized Alloy Steel Drum	Yes
NeveRust® Stainless Steel Drum	No
Cabinet	Painted Steel
Door	Round White Trim
All Available Colors	White (W)

### POWER SOURCE

Ratings	CSA Listed
Electrical Requirements	Electric: 120/240V, 60Hz, 26A (120/208V, 60Hz, 23A) Gas: 120V, 60Hz, 5Amps
Type	Electric/ Gas
Plug	Electric: Not Included Gas: Included
Plug Type	Electric: 4-Wire or 3-Wire (Homes built after 1996 require 4-Wire) Gas: 3 Prong
BTU Rating	Electric: N/A Gas: 20,000

### OPTIONS

LP Conversion Kit	Electric: N/A Gas: 383EEL3002R
Side Venting Kit	383EEL9001B
Drying Rack	3750EEL1001A
Pedestal	WDP6W
Pedestal (WxHxD)	27" x 13 5/8" x 28" (43 7/8" D with door open)


### LIMITED WARRANTY

Parts & Labor	1 Year
Drum	3 Years

### UPC CODES

DLE3420W (Electric)	048231349901
DLG3421W (Gas)	048231349918

## DIMENSION / CLEARANCES

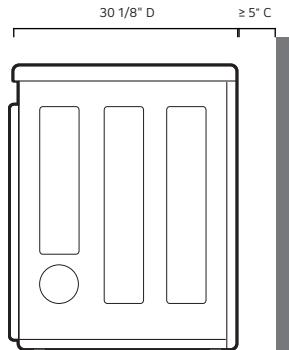

## DIMENSIONS

Product (WxHxD)	27" X 39" X 30 1/8"
Depth with Door Open	51 3/8"
Carton (WxHxD)	29" x 43 1/4" x 31 3/8"
Weight (Product)	Electric: 120.15 lbs / Gas: 123.02 lbs
Weight (Carton)	Electric: 122.4 lbs / Gas: 124.9 lbs


## DIMENSION / CLEARANCES

## CLOSET VENTILATION REQUIREMENTS

Closets with doors must have both an upper and lower vent to prevent heat and moisture buildup in the closet. One upper vent opening with a minimum opening of 48 sq. in. (310 cm<sup>2</sup>) must be installed no lower than 6 feet above the floor. One lower vent opening with a minimum opening of 24 sq. in. (155 cm<sup>2</sup>) must be installed no more than one foot above the floor. Install vent grilles in the door or cut down the door at the top and bottom to form openings. Louvered doors with equivalent ventilation openings are also acceptable.

## DIMENSION / CLEARANCES

## Installation Spacing for Recessed Area or Closet, with Stacked Washer and Dryer

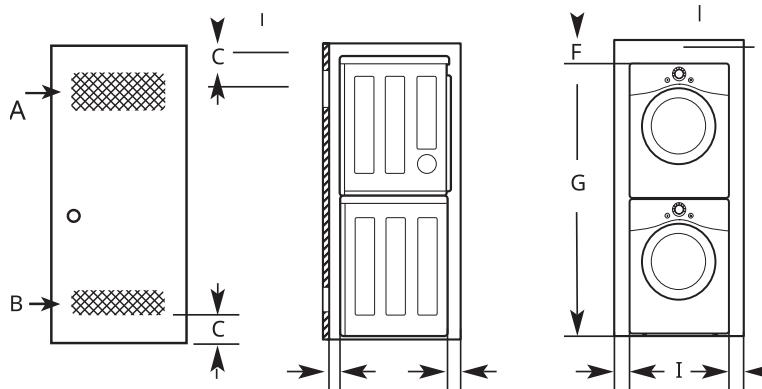

## DIMENSIONS



A Upper Ventilation Opening	≥ 48 sq. in. (310 cm <sup>2</sup> )
B Lower Ventilation Opening	≥ 24 sq. in. (155 cm <sup>2</sup> )
C Distance to Ventilation Opening	≥ 3" (76 mm)
D Front Clearance	≥ 1" (25 mm)
E Back Clearance	≥ 5 1/2" (140 mm)
F Top Clearance to the Ceiling	≥ 6" (152 mm)
G Height to the Top of Stacked Appliances†	77 1/2" (1968 mm)
H Side Clearance	≥ 1" (25 mm)
I Width	27" (686 mm)

## DIMENSION / CLEARANCES

## Installation Spacing for Recessed Area or Closet Installation

These clearance are recommended for this dryer.

- Additional clearance should be considered for ease of installation and servicing.
- Additional clearance should be considered on all sides of the dryer to reduce noise transfer.

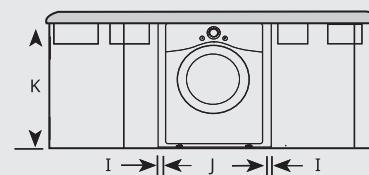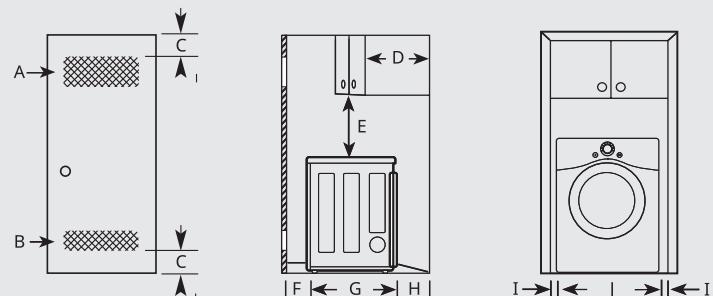

## DIMENSIONS

A Upper Ventilation Opening	≥ 48 sq. in. (310 cm <sup>2</sup> )
B Lower Ventilation Opening	≥ 24 sq. in. (155 cm <sup>2</sup> )
C Distance to Ventilation Opening	≥ 3" (76 mm)
D Overhead Cabinet Depth	≤ 14" (356 mm)
E Distance to the Overhead Cabinet / Shelf	≥ 18" (457 mm)
F Front Clearacne	1" (25 mm)
G Depth	30 1/8" (765 mm)
H Back Clearance	≥ 5" (127 mm)
I Side Clearance	≥ 1" (25 mm)
J Width	27" (686 mm)
K Height of Cabinet Opening	39" (990 mm)

## LEVELING THE APPLIANCE

## CHECKING THE LEVEL

Position the appliance in the final location and place a level across the top of the appliance.

1 Level

2 Level Feet

