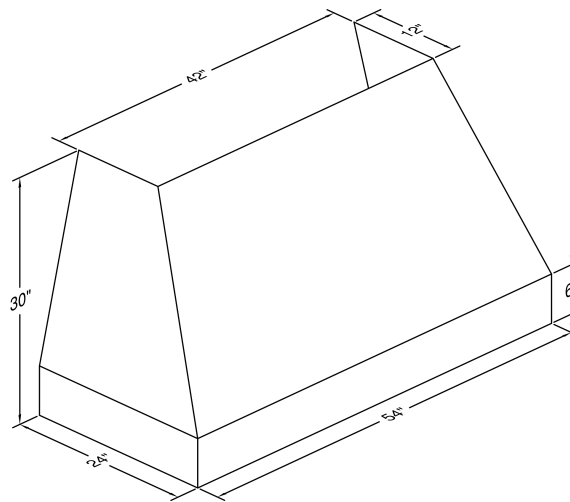
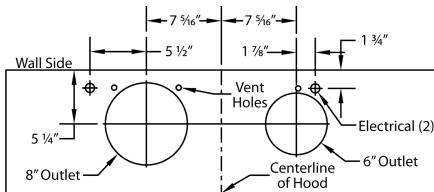


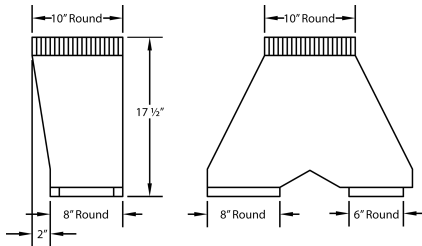
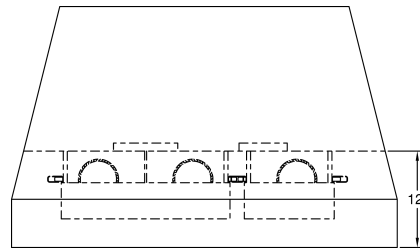
**Model Number: JPH354/C1**

Special Notes: LED lights. This model is not available with heat lamps.


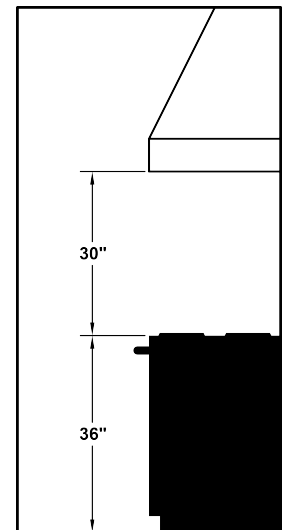
|                  |     |
|------------------|-----|
| <b>WIDTH:</b>    | 54" |
| <b>DEPTH:</b>    | 24" |
| <b>HEIGHT:</b>   | 30" |
| <b>CFM:</b>      | 900 |
| <b>SONES:</b>    | 6.3 |
| <b>AMPS:</b>     | 6.0 |
| <b># LIGHTS:</b> | 4   |

**CONNECTION DIAGRAM**

900 CFM B200 Dual &amp; B100 Single Blower (Top View)

VP562 Transition (Optional) For B300  
(B200 Dual Blower & B100 Single  
Blower)

(Front View)

VP562 transition  
centers outlet  
over top of hood.**REC. MOUNTING HEIGHT\***\* Exceeding recommended  
mounting height may compromise  
performance.**ELECTRICAL/MECHANICAL SPECIFICATIONS FOR BLOWER UNIT**

| MODEL                   | VOLTS | AMPS+ | HZ | RPM  | CFM SP@0.0" | EQUIV CFM\$ | CFM SP@0.1" | CFM SP@0.2" | CFM SP@0.3" | MIN. ROUND<br>DUCT SIZE | SONES# |
|-------------------------|-------|-------|----|------|-------------|-------------|-------------|-------------|-------------|-------------------------|--------|
| B200 Dual & B100 Single | 115   | 6.0   | 60 | 1550 | 900         | 1350        | 804         | 725         | 655         | 10" (79 sq. in.)        | 6.3    |

+ This model is equipped with LED lighting: (2 lights: 30" - 41", 3 lights: 42" - 53", 4 lights: 54" - 66").

\$ Because the Magic Lung blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other filtration systems. When comparing the Magic Lung with other blower units made by other manufacturers, use the "Equivalent CFM".

# Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.