

SONANCE

VISUAL EXPERIENCE SERIES

SONANCE BEYOND SOUND

RE-IMAGINING SOUND

We continuously innovate beyond product, crafting new categories and telling compelling stories that add value to our solutions, allowing music to enrich life.

DESIGNED TO DISAPPEAR

Our technology effortlessly blends into architecture and interior design, transforming any space while respecting its original aesthetic.

AUTHENTIC PARTNERSHIP

We form enduring relationships built on authenticity and trust. With an “Our Team is Your Team” ethos, we collaborate closely with our customers to help unlock value and be the best partner we can be.

LEADING WITH CULTURE

We foster a culture of transparency, engagement, and genuine care, where team authenticity fuels our shared mission to ensure customer success.

GOING BEYOND

Driven by a purpose beyond profit, we leverage our success and resources to make a positive impact, creating a better world through our dedication to philanthropy and community service.





VISUAL EXPERIENCE SERIES

Sonance Visual Experience Series speakers are engineered for maximum coverage and fidelity to create the most crisp, comfortable, consistent experience possible. Each model delivers the greatest dispersion possible so that everyone in the surrounding space receives the same experience, making it easier to design even, balanced audio systems.

MUSIC FOR...

...THE WAY YOU LIVE AT HOME


...THE WAY YOU LIVE AT SEA

...THE WAY YOU DO BUSINESS



VISUAL EXPERIENCE DESIGN

Sonance Visual Experience Flex Frame Mounting System is a two-piece design that allows VX models the flexibility to install in one or two-stages (does not apply to VX60R or VX80R models). Leverage the Flex Frame two-stage process to maximize installation efficiency on large scale projects.

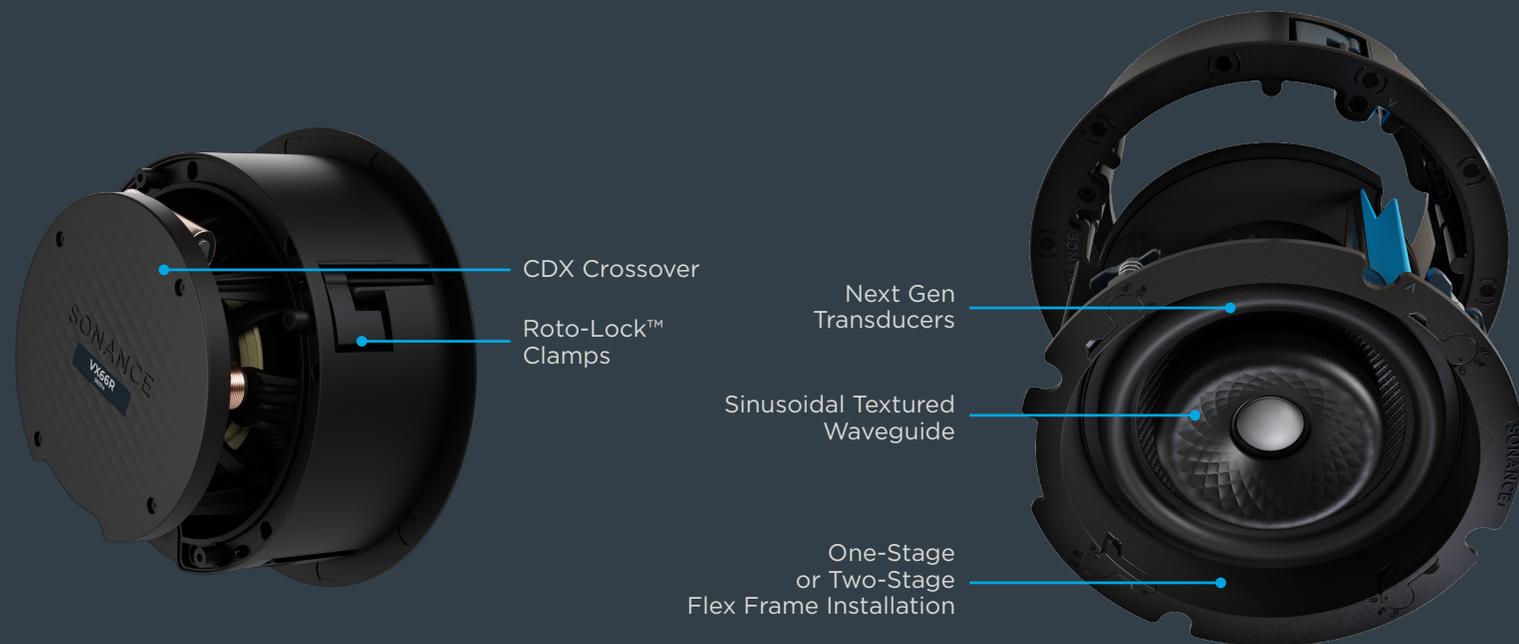

ADVANCED TECHNOLOGY

Two-Piece Flex Frame Mounting System

Vastly improved single stage or two stage installation process.

Brilliant White Micro Trim Grille

Brighter, more consistent white shade. RAL standardized to better match ceilings and walls. Bezel size 50% smaller with knife-edge to minimize shadow lines.

Optional Trimless Grille

Same brilliant white color but in a modern, monolithic aesthetic with no bezel.

Sinusoidal Textured Waveguide

Achieve even, balanced tonality to better fill spaces with smooth, extended treble that is remarkably consistent at any angle.

CDX Crossovers

Adapted from Sonance Invisible Series, our Constant Directivity Crossovers align tweeters and woofers to provide consistent dispersion at all frequencies.

Advanced Driver Motor Topology

Engineered via sophisticated magnetic and physical simulations to reduce distortion to nearly inaudible levels, resulting in the highest fidelity drivers we have ever made.

Multitude of Optional Accessories

127 new speakers and accessories, 1,800 total unique combinations of speaker configurations are possible from grilles to enclosures to additional installation accessories. This gives the flexibility to tailor Visual Experience to blend into the design of any space.

VX PERFORMANCE LEVELS



LEVEL 0

WOOFER: Textured Polypropylene cone with a rubber surround

TWEETER: Cloth dome, Ferrofluid-cooled, acoustic back chamber

DISPERSION TECHNOLOGY: Sinusoidal Textured Waveguide



LEVEL 2

WOOFER: Textured Polypropylene cone with a rubber surround, pivoting

TWEETER: Cloth dome, Ferrofluid-cooled, acoustic back chamber

DISPERSION TECHNOLOGY: Sinusoidal Textured Waveguide



LEVEL 4

WOOFER: Textured Polypropylene cone with a rubber surround, pivoting

TWEETER: Ceramic dome, Ferrofluid-cooled, acoustic back chamber

DISPERSION TECHNOLOGY: Sinusoidal Textured Waveguide



LEVEL 6

WOOFER: Kevlar/Nomex cone, rubber surround, pivoting

TWEETER: Ceramic dome, Ferrofluid-cooled, acoustic back chamber

DISPERSION TECHNOLOGY: Sinusoidal Textured Waveguide

INSTALLATION

Visual Experience Series features flexible installation styles to maximize efficiency for best business practices in the field. Whether for large scale installations or multi-phase project schedules, leveraging the Sonance VX two-stage process makes installation simple to scale, no matter the project.

ONE-STAGE INSTALLATION

Similar to the legacy VP models.

STEP 1: Cut the surface

STEP 2: Insert the Speaker

STEP 3: Tighten the Toggle Feet



TWO-STAGE INSTALLATION


The Flex Frame process allows the speaker to be decoupled and installed in two stages for flexibility when installing across large scale or multi-phase projects.

STEP 1: Cut the surface

STEP 2: Insert the VX Flex Frame and Plug, tighten the Toggle Feet

STEP 3: When ready to complete install, remove Plug and insert VX Speaker Module

STEP 4: Click and lock the Speaker Module to the Flex Frame

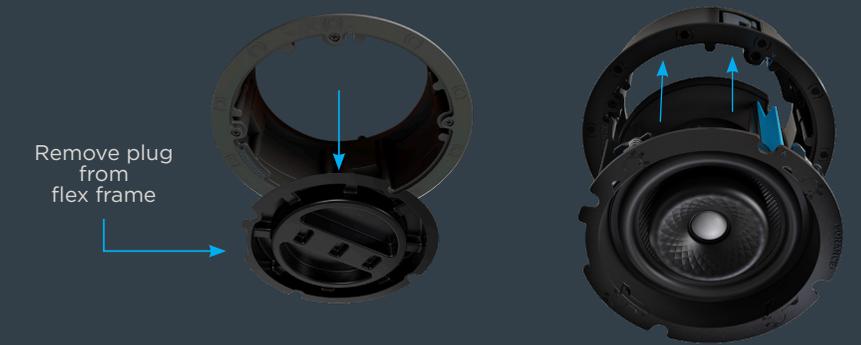


Two-stage installation not available on VX60R, VX80R, or James VXQ models.

FLEXIBLE FINISH

VX grilles are available in round, square, and rectangle form factors in either micro trim, trimless, or Trufig mounted trimless paintable options that can also be custom laser printed. Micro trim grilles ship standard with all VX models.


Sleek Trimless grille for a clean finish with zero seam.

No Trim

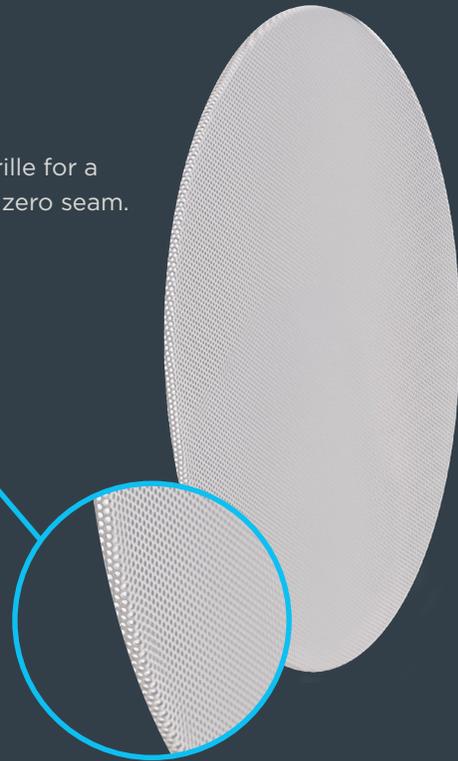


Single-piece paintable grille with ultra-slim 3mm Micro Trim.

0.12" (3mm) Trim

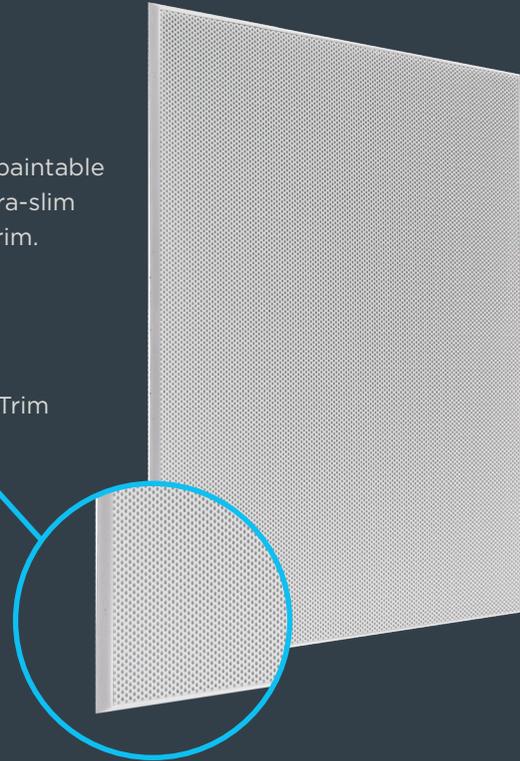


MICRO TRIM GRILLES


Ships standard with all VX Round and Rectangle models.

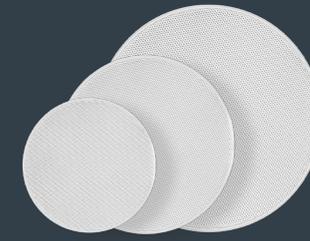

ROUND



SQUARE

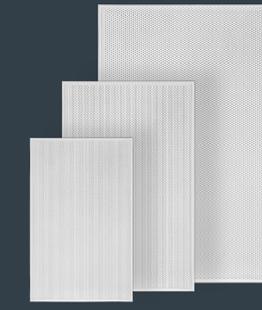


RECTANGLE


TRIMLESS GRILLES



ROUND



SQUARE

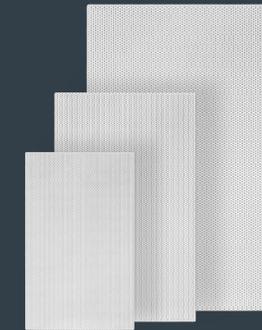

RECTANGLE

STANDARD FINISHES

Paintable grilles to order in eight finishes at no additional charge.



GLBK
GLOSS BLACK



STBK
SATIN BLACK



STUDIOBK
STUDIO BLACK



DKTI
DARK TITANIUM



LITI
LIGHT TITANIUM



MRSLV
MIRROR SILVER



STWH
SATIN WHITE



GLWH
GLOSS WHITE

VISUAL EXPERIENCE ROUND SPEAKER SELECTION



VX 4-INCH ROUND SPEAKERS

VX42R

Tweeter	0.75" (19mm) cloth dome, Ferrofluid-cooled, acoustic back chamber
Woofers	4.5" (114mm) textured polypropylene cone, rubber surround, pivoting
Dispersion Technology	Sinusoidal textured waveguide
Speaker Pivot	Coincident Woofer + Tweeter Pivoting
Frequency Response (+/- 3dB)	60Hz - 20kHz
Impedance	8 ohms nominal; 6 ohms minimum
Power Handling (RMS)	5 watts minimum; 70 watts maximum
Sensitivity (2.83V/1m)	89dB
Mounting Technology	Flex Frame 1 or 2-stage, 3 x RotoLock® Clamps
Speaker Mounting Depth (D)	4.53" (115mm)



VX46R

Tweeter	0.75" (19mm) ceramic dome, Ferrofluid-cooled, acoustic back chamber
Woofers	4.5" (114mm) Kevlar/Nomex cone, rubber surround, pivoting
Dispersion Technology	Sinusoidal textured waveguide
Speaker Pivot	Coincident Woofer + Tweeter Pivoting
Frequency Response (+/- 3dB)	58Hz - 20kHz
Impedance	8 ohms nominal; 6 ohms minimum
Power Handling (RMS)	5 watts minimum; 80 watts maximum
Sensitivity (2.83V/1m)	90dB
Mounting Technology	Flex Frame 1 or 2-stage, 3 x RotoLock® Clamps
Speaker Mounting Depth (D)	4.61" (117.1mm)



SHARED DIMENSIONS

Cut-Out Dimensions (Dia)	5.875" (149mm)	Square Micro Trim Grille (WxH)	6.77" x 6.77" (171.8mm x 171.8mm)
Speaker Mounting Depth (D)	5.75" (146.1mm)	Square Trimless Grille (WxH)	6.42" x 6.42" (163mm x 163mm)
Round Micro Trim Grille (Dia)	6.77" (171.8mm)	Shipping Weight	6 lbs. (2.8kg)
Round Trimless Grille (Dia)	6.42" (163mm)		
Mounting Depth + Retrofit Encl.	3.84" (97.6mm)		

VX 6-INCH ROUND SPEAKERS

VX60R

Tweeter	1" (25mm) cloth dome, Ferrofluid-cooled, acoustic back chamber
Woofers	6.5" (165mm) textured polypropylene cone, rubber surround
Dispersion Technology	Sinusoidal textured waveguide
Speaker Pivot	No Pivoting
Frequency Response (+/- 3dB)	48Hz - 20kHz
Impedance	8 ohms nominal; 6 ohms minimum
Power Handling (RMS)	5 watts minimum; 100 watts maximum
Sensitivity (2.83V/1m)	89dB
Mounting Technology	1-stage, 4 x RotoLock® Clamps



VX64R

Tweeter	1" (25mm) ceramic dome, Ferrofluid-cooled, acoustic back chamber
Woofers	6.5" (165mm) textured polypropylene cone, rubber surround, pivoting
Dispersion Technology	Sinusoidal textured waveguide
Speaker Pivot	Coincident Woofer + Tweeter Pivoting
Frequency Response (+/- 3dB)	48Hz - 20kHz
Impedance	8 ohms nominal; 6 ohms minimum
Power Handling (RMS)	5 watts minimum; 125 watts maximum
Sensitivity (2.83V/1m)	89dB
Mounting Technology	Flex Frame 1 or 2-stage, 4 x RotoLock® Clamps



VX62R

Tweeter	1" (25mm) cloth dome, Ferrofluid-cooled, acoustic back chamber
Woofers	6.5" (165mm) textured polypropylene cone, rubber surround, pivoting
Dispersion Technology	Sinusoidal textured waveguide
Speaker Pivot	Coincident Woofer + Tweeter Pivoting
Frequency Response (+/- 3dB)	45Hz - 20kHz
Impedance	8 ohms nominal; 6 ohms minimum
Power Handling (RMS)	5 watts minimum; 125 watts maximum
Sensitivity (2.83V/1m)	89dB
Mounting Technology	Flex Frame 1 or 2-stage, 4 x RotoLock® Clamps



VX66R

Tweeter	1" (25mm) ceramic dome, Ferrofluid-cooled, acoustic back chamber
Woofers	6.5" (165mm) Kevlar/ Nomex cone, rubber surround, pivoting
Dispersion Technology	Sinusoidal textured waveguide
Speaker Pivot	Coincident Woofer + Tweeter Pivoting
Frequency Response (+/- 3dB)	43Hz - 20kHz
Impedance	8 ohms nominal; 6 ohms minimum
Power Handling (RMS)	5 watts minimum; 140 watts maximum
Sensitivity (2.83V/1m)	90dB
Mounting Technology	Flex Frame 1 or 2-stage, 4 x RotoLock® Clamps



SHARED DIMENSIONS

Cut-Out Dimensions (Dia)	8.25" (210mm)		
Speaker Mounting Depth (D)	4.92" (125mm)		
Round Micro Trim Grille (Dia)	9.62" (244.4mm)	Square Micro Trim Grille (WxH)	9.62" x 9.62" (244.4mm x 244.4mm)
Round Trimless Grille (Dia)	9.28" (235.6mm)	Square Trimless Grille (WxH)	9.28" x 9.28" (235.6mm x 235.6mm)
Mounting Depth + Retrofit Encl.	5.75" (146.1mm)	Shipping Weight	9 lbs. (4.1kg)

VX 8-INCH ROUND SPEAKERS

VX80R

Tweeter	1.2" (30mm) cloth dome, acoustic back chamber, Ferrofluid-cooled
Woofers	8" (203mm) textured polypropylene cone, rubber surround
Dispersion Technology	Sinusoidal textured waveguide
Speaker Pivot	No Pivoting
Frequency Response (+/- 3dB)	42Hz - 20kHz
Impedance	8 ohms nominal; 6 ohms minimum
Power Handling (RMS)	5 watts minimum; 125 watts maximum
Sensitivity (2.83V/1m)	90dB
Mounting Technology	1-stage, 4 x RotoLock® Clamps
Speaker Mounting Depth (D)	4.69" (119mm)
Shipping Weight	12.5 lbs. (5.67kg)



VX86R

Tweeter	1.2" (30mm) ceramic dome, acoustic back chamber, Ferrofluid-cooled
Woofers	8" (203mm) Kevlar/Nomex cone, rubber surround, pivoting
Dispersion Technology	Sinusoidal textured waveguide
Speaker Pivot	Coincident Woofer + Tweeter Pivoting
Frequency Response (+/- 3dB)	34Hz - 20kHz
Impedance	8 ohms nominal; 6 ohms minimum
Power Handling (RMS)	5 watts minimum; 150 watts maximum
Sensitivity (2.83V/1m)	91dB
Mounting Technology	Flex Frame 1 or 2-stage, 4 x RotoLock® Clamps
Speaker Mounting Depth (D)	5.51" (140mm)
Shipping Weight	20.0 lbs. (9.0kg)



VX82R

Tweeter	1.2" (30mm) cloth dome, acoustic back chamber, Ferrofluid-cooled
Woofers	8" (203mm) textured polypropylene cone, rubber surround, pivoting
Dispersion Technology	Sinusoidal textured waveguide
Speaker Pivot	Coincident Woofer + Tweeter Pivoting
Frequency Response (+/- 3dB)	38Hz - 20kHz
Impedance	8 ohms nominal; 6 ohms minimum
Power Handling (RMS)	5 watts minimum; 125 watts maximum
Sensitivity (2.83V/1m)	90dB
Mounting Technology	Flex Frame 1 or 2-stage, 4 x RotoLock® Clamps
Speaker Mounting Depth (D)	5.51" (140mm)
Shipping Weight	20.0 lbs. (9.0kg)



SHARED DIMENSIONS

Cut-Out Dimensions (Dia)	10.125" (257mm)	Square Micro Trim Grill (WxH)	11.52" x 11.52" (292.6mm x 292.6mm)
Round Micro Trim Grille (Dia)	11.52" (292.6mm)	Square Trimless Grille (WxH)	11.17" x 11.17" (283.8mm x 283.8mm)
Round Trimless Grille (Dia)	11.17" (283.8mm)		
Mounting Depth + Retrofit Encl.	6.52" (165.6mm)		

VISUAL EXPERIENCE RECTANGLE SPEAKER SELECTION



VX 4-INCH RECTANGLE SPEAKERS

VX42

Tweeter	0.75" (19mm) cloth dome, Ferrofluid-cooled, acoustic back chamber
Woofers	4.5" (114mm) textured polypropylene cone, rubber surround
Dispersion Technology	Sinusoidal textured waveguide
Frequency Response (+/- 3dB)	60Hz - 20kHz
Impedance	8 ohms nominal; 6 ohms minimum
Power Handling (RMS)	5 watts minimum; 70 watts maximum
Sensitivity (2.83V/1m)	89dB
Mounting Technology	Flex Frame 1 or 2-stage, 4 x RotoLock® Clamps



VX46

Tweeter	0.75" (19mm) ceramic dome, Ferrofluid-cooled, acoustic back chamber
Woofers	4.5" (114mm) Kevlar/Nomex cone, rubber surround
Dispersion Technology	Sinusoidal textured waveguide
Frequency Response (+/- 3dB)	58Hz - 20kHz
Impedance	8 ohms nominal; 6 ohms minimum
Power Handling (RMS)	5 watts minimum; 70 watts maximum
Sensitivity (2.83V/1m)	90dB
Mounting Technology	Flex Frame 1 or 2-stage, 4 x RotoLock® Clamps



SHARED DIMENSIONS

Cut-Out Dimensions (WxH)	4.625" x 8" (117mm x 203mm)
Speaker Mounting Depth (D)	3.28" (83.2mm)
Micro Trim Grille (WxH)	5.47" x 8.8" (139.1mm x 223.6mm)
Trimless Grille (WxH)	5.13" x 8.46" (130.2mm x 214.8mm)
Mounting Depth + Retrofit Encl.	3.84" (97.6mm)
Shipping Weight	6 lbs. (2.8kg)

VX 6-INCH RECTANGLE SPEAKERS

VX62

Tweeter	1" (25mm) cloth dome, Ferrofluid-cooled, acoustic back chamber
Woofers	6.5" (165mm) textured polypropylene cone, rubber surround
Dispersion Technology	45Hz - 20kHz
Frequency Response (+/- 3dB)	60Hz - 20kHz
Impedance	8 ohms nominal; 6 ohms minimum
Power Handling (RMS)	5 watts minimum; 125 watts maximum
Sensitivity (2.83V/1m)	89dB
Mounting Technology	Flex Frame 1 or 2-stage, 4 x RotoLock® Clamps
Shipping Weight	9 lbs. (4.1kg)



VX66

Tweeter	1" (25mm) ceramic dome, Ferrofluid-cooled, acoustic back chamber
Woofers	6.5" (165mm) Kevlar/Nomex cone, rubber surround
Frequency Response (+/- 3dB)	43Hz - 20kHz
Impedance	8 ohms nominal; 6 ohms minimum
Power Handling (RMS)	5 watts minimum; 140 watts maximum
Sensitivity (2.83V/1m)	90dB
Mounting Technology	Flex Frame 1 or 2-stage, 4 x RotoLock® Clamps
Shipping Weight	10 lbs. (4.5kg)



SHARED DIMENSIONS

Cut-Out Dimensions (WxH)	6.9375" x 10.75" (176mm x 273mm)
Speaker Mounting Depth (D)	3.48" (88.3mm)
Micro Trim Grille (WxH)	8.23" x 12.12" (208.9mm x 307.7mm)
Trimless Grille (WxH)	7.88" x 11.77" (200.1mm x 298.9mm)
Mounting Depth + Retrofit Encl.	3.84" (97.6mm)

VX 8-INCH RECTANGLE SPEAKERS

VX82

Tweeter	1.2" (30mm) cloth dome, Ferrofluid-cooled, acoustic back chamber
Woofers	8" (203mm) textured polypropylene cone, rubber surround
Dispersion Technology	Sinusoidal textured waveguide
Frequency Response (+/- 3dB)	38Hz - 20kHz
Impedance	8 ohms nominal; 6 ohms minimum
Power Handling (RMS)	5 watts minimum; 125 watts maximum
Sensitivity (2.83V/1m)	90dB
Mounting Technology	Flex Frame 1- or 2-stage, 6 RotoLock® Clamps



VX86

Tweeter	1.2" (30mm) ceramic dome, Ferrofluid-cooled, acoustic back chamber
Woofers	8" (203mm) Kevlar/Nomex cone, rubber surround
Dispersion Technology	Sinusoidal textured waveguide
Frequency Response (+/- 3dB)	34Hz - 20kHz
Impedance	8 ohms nominal; 6 ohms minimum
Power Handling (RMS)	5 watts minimum; 150 watts maximum
Sensitivity (2.83V/1m)	91dB
Mounting Technology	Flex Frame 1- or 2-stage, 6 RotoLock® Clamps



SHARED DIMENSIONS

Cut-Out Dimensions (WxH)	8.5" x 14.5" (216mm x 368mm)
Speaker Mounting Depth (D)	3.64" (92.4mm)
Micro Trim Grille (WxH)	9.72" x 15.87" (246.8mm x 403.1mm)
Trimless Grille (WxH)	9.37" x 15.52" (238.0mm x 394.3mm)
Mounting Depth + Retrofit Encl.	3.86" (98.1mm)
Shipping Weight	20 lbs. (9kg)

VISUAL EXPERIENCE SPECIALITY SPEAKER SELECTION



VX 6-INCH LCR SPEAKERS

VX62 LCR

Tweeter	1" (25mm) cloth dome, Ferrofluid-cooled, acoustic back chamber
Woofers	Two 6.5" (165mm) textured polypropylene cones, rubber surrounds
Frequency Response (+/- 3dB)	45Hz - 20kHz
Impedance	8 ohms nominal; 6 ohms minimum
Power Handling (RMS)	5 watts minimum; 125 watts maximum
Sensitivity (2.83V/1m)	89dB
Mounting Technology	Flex Frame 1 or 2-stage, 4 x RotoLock® Clamps
Shipping Weight	9 lbs. (4.1kg)



VX66 LCR

Tweeter	1" (25mm) ceramic dome, Ferrofluid-cooled, acoustic back chamber
Woofers	Two 6.5" (165mm) Kevlar/Nomex cones, rubber surrounds
Frequency Response (+/- 3dB)	43Hz - 20kHz
Impedance	8 ohms nominal; 6 ohms minimum
Power Handling (RMS)	5 watts minimum; 140 watts maximum
Sensitivity (2.83V/1m)	90dB
Mounting Technology	Flex Frame 1 or 2-stage, 4 x RotoLock® Clamps
Shipping Weight	10 lbs. (4.5kg)



SHARED DIMENSIONS

Cut-Out Dimensions (WxH)	6.9375" x 14.57" (176mm x 370mm)
Speaker Mounting Depth (D)	3.5" (89mm)
Micro Trim Grille (WxH)	8.23" x 15.87" (208.9mm x 403.1mm)
Trimless Grille (WxH)	7.88" x 15.52" (200.1mm x 394.3mm)
Mounting Depth + Retrofit Encl.	3.84" (97.6mm)

VX 4-INCH SST SPEAKERS

VX46R SST

Tweeter	0.75" (19mm) ceramic dome, Ferrofluid-cooled, acoustic back chamber, dual voice coil
Woofers	4.5" (114mm) Kevlar/Nomex cone, rubber surround, pivoting, dual voice coil
Frequency Response (+/- 3dB)	58Hz - 20kHz
Impedance	8 ohms nominal; 6 ohms minimum
Power Handling (RMS)	5 watts minimum; 80 watts maximum
Sensitivity (2.83V/1m)	90dB
Shipping Weight	3 lbs. (1.4kg)
Cut-Out Dimensions (Dia)	5.875" (149mm)
Speaker Mounting Depth (D)	4.61" (117.1mm)
Round Micro Trim Grille (Dia)	6.77" (171.8mm)
Round Trimless Grille (Dia)	6.42" (163mm)
Square Micro Trim Grille (WxH)	6.77" x 6.77" (171.8mm x 171.8mm)
Square Trimless Grille (WxH)	6.42" x 6.42" (163mm x 163mm)
Mounting Depth + Retrofit Encl.	5.75" (146.1mm)



VX 6 AND 8-INCH SST SPEAKERS

VX62R SST

Tweeter	1" (25mm) cloth dome, Ferrofluid-cooled, acoustic back chamber, dual voice coil
Woofers	6.5" (165mm) textured polypropylene cone, rubber surround, pivoting, dual voice coil
Frequency Response (+/- 3dB)	45Hz - 20kHz
Impedance	8 ohms nominal; 6 ohms minimum
Power Handling (RMS)	5 watts minimum; 125 watts maximum
Sensitivity (2.83V/1m)	89dB



VX66R SST

Tweeter	1" (25mm) ceramic dome, Ferrofluid-cooled, acoustic back chamber, dual voice coil
Woofers	6.5" (165mm) Kevlar/Nomex cone, rubber surround, pivoting, dual voice coil
Frequency Response (+/- 3dB)	43Hz - 20kHz
Impedance	8 ohms nominal; 6 ohms minimum
Power Handling (RMS)	5 watts minimum; 140 watts maximum
Sensitivity (2.83V/1m)	90dB



SHARED DIMENSIONS

Cut-Out Dimensions (Dia)	8.25" (210mm)	
Speaker Mounting Depth (D)	4.92" (125mm)	
Round Micro Trim Grille (Dia)	9.62" (244.4mm)	Square Micro Trim Grill (WxH)
Round Trimless Grille (Dia)	9.28" (235.6mm)	Square Trimless Grille (WxH)
Mounting Depth + Retrofit Encl.	5.75" (146.1mm)	Shipping Weight
		9.62" x 9.62" (244.4mm x 244.4mm)
		9.28" x 9.28" (235.6mm x 235.6mm)
		4.5 lbs. (2.1kg)

VX66 SST

Tweeter	1" (25mm) ceramic dome, Ferrofluid-cooled, acoustic back chamber, dual voice coil
Woofers	6.5" (165mm) Kevlar/Nomex cone, rubber surround, dual voice coil
Frequency Response (+/- 3dB)	43Hz - 20kHz
Impedance	8 ohms nominal; 6 ohms minimum
Power Handling (RMS)	5 watts minimum; 140 watts maximum
Sensitivity (2.83V/1m)	89dB
Micro Trim Grille (WxH)	8.23" x 12.12" (208.9mm x 307.7mm)
Trimless Grille (WxH)	7.88" x 11.77" (200.1mm x 298.9mm)
Speaker Mounting Depth (D)	3.48" (88.3mm)
Mounting Depth + Retrofit Encl.	3.84" (97.6mm)
Cut-Out Dims (WxH)	6.9375" x 10.75" (176mm x 273mm)
Shipping Weight	5 lbs. (2.3kg)



VX86R SST

Tweeter	1.2" (30mm) ceramic dome, Ferrofluid-cooled, acoustic back chamber, dual voice coil
Woofers	8" (203mm) Kevlar/Nomex cone, rubber surround, pivoting, dual voice coil
Frequency Response (+/- 3dB)	34Hz - 20kHz
Impedance	8 ohms nominal; 6 ohms minimum
Power Handling (RMS)	5 watts minimum; 150 watts maximum
Sensitivity (2.83V/1m)	91dB
Round Micro Trim Grille (Dia)	11.52" (292.6mm)
Round Trimless Grille (Dia)	11.17" (283.8mm)
Square Micro Trim Grille (WxH)	11.52" x 11.52" (292.6mm x 292.6mm)
Square Trimless Grille (WxH)	11.17" x 11.17" (283.8mm x 283.8mm)
Speaker Mounting Depth (D)	5.51" (140mm)
Mounting Depth + Retrofit Encl.	6.52" (165.6mm)
Cut-Out Dims (Dia)	10.125" (257mm)
Shipping Weight	10 lbs. (4.5kg)



SONANCE

©2024 Sonance. All rights reserved. Sonance, James Loudspeaker and IPORT are registered trademarks. Due to continuous product improvement, all features and specifications are subject to change without notice. For the latest Sonance product specification information visit our website: www.sonance.com | Sonance • 991 Calle Amanecer • San Clemente, CA 92673 USA 10.16.2024