

# FISHER & PAYKEL

## PRELIMINARY SPECIFICATION GUIDE

## GAS RANGE



### OVERVIEW

Our Professional Style ranges are distinctive and bold – designed to match perfectly with Professional Style wall ovens, dishwashing and refrigeration appliances. Clever LED halo-illuminated dials offer heat information at a glance, while the exceptional power of sealed dual flow gas burners provide refined performance that delivers high heat or the most gentle simmer.

### MODELS

#### Gas Range, 48", 8 Burner

RGV3-488-N

RGV3-488-L

#### Gas Range, 48", 5 Burner with Griddle

RGV3-485GD-N

RGV3-485GD-L

#### Gas Range, 36", 6 Burner

RGV3-366-N

RGV3-366-L

#### Gas Range, 30", 4 Burner

RGV3-304-N

RGV3-304-L

#### Gas Range, 30", 5 Burner

RGV3-305-N

RGV3-305-L

### SERIES & STYLE

Series 7

Professional Style

### FEATURES

- ① Made from commercial-style stainless steel
- ② Designed to match our Professional style kitchen appliances
- ③ Powerful sealed dual flow gas burners for precise control
- ④ Halo-illuminated dials for information at a glance
- ⑤ Star-K certification
- ⑥ Easy to clean dishwasher-proof trivets
- ⑦ Generous cavity size
- ⑧ Choice of round or square handles

### ACCESSORIES

- ① Full extension telescopic sliding shelves
- ② Broil pan
- ③ Optional square handle AH-R48
- ④ Optional backguard  
BGRV2-3048 / BGRV2-1248 / BGRV3-3048H

# FISHER & PAYKEL


## PRELIMINARY SPECIFICATION GUIDE

## GAS RANGE, 30"

### SPECIFICATIONS


<b>Model No.</b>	RGV3-304-N, RGV3-304-L, RGV3-305-N, RGV3-305-L
<b>Dimensions</b>	H 35 3/4-36 3/4" (908-933mm) x W 29 7/8" (759mm) x D 29 1/8" (740mm)
<b>Electrical</b>	
<b>Supply</b>	120/240VAC, 60Hz
<b>Service</b>	30-amp circuit

### SUPPLY AREA DIMENSIONS

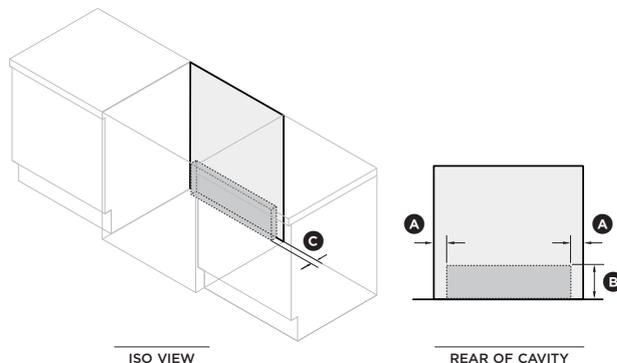


	in	mm
(A) Distance from either edge of range to supply area	1 1/2	38
(B) Height of gas and electrical supply areas (from floor)	6	152
(C) Depth of supply areas (ie maximum protrusion of gas connection from wall)	2	51

### PRODUCT DIMENSIONS

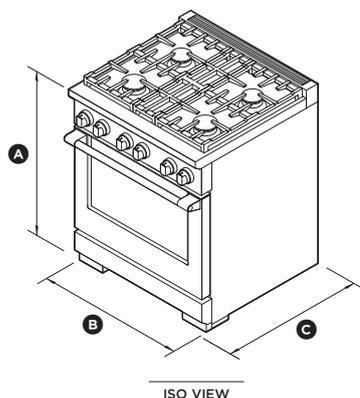

	in	mm
(A) Overall height (from floor to cooktop, excl. pan supports and vent trim)	min 35 3/4 max 36 3/4	min 908 max 933
(B) Overall width	29 7/8	759
(C) Depth from front of range to rear (incl. vent trim, excl. dials and handle)	29 1/8	740

### CAVITY DIMENSIONS: STANDARD INSTALLATION

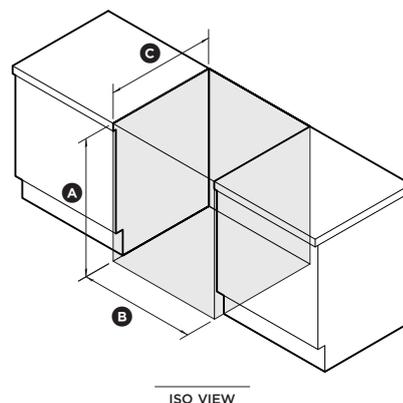

	in	mm
(A) Overall height of cavity* • for level counter • with range levelling legs fully extended	35 3/4 36 3/4	908 933
(B) Overall width of cavity	30	762
(C) Maximum depth of cavity • projecting control panel • flush control panel	25 1/8 27 11/16	638 703

\*Depending on height of range.

# FISHER & PAYKEL


## PRELIMINARY SPECIFICATION GUIDE

## GAS RANGE, 36"

### SPECIFICATIONS


<b>Model No.</b>	RGV3-366-N, RGV3-366-L
<b>Dimensions</b>	H 35 3/4-36 3/4" (908-933mm) x W 35 7/8" (911mm) x D 29 1/8" (740mm)
<b>Electrical</b>	
<b>Supply</b>	120
<b>Service</b>	240VAC, 60Hz

### SUPPLY AREA DIMENSIONS

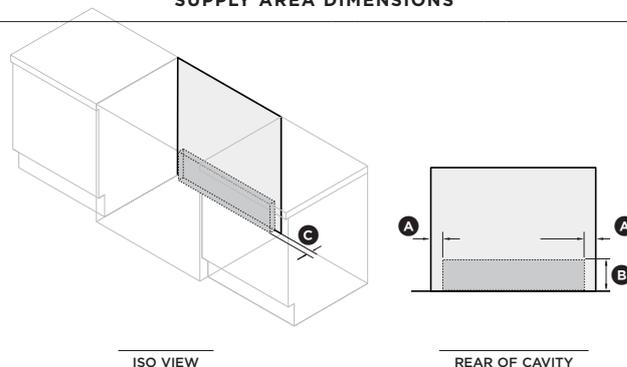


		in	mm
(A)	Distance from either edge of range to supply area	1 1/2	38
(B)	Height of gas and electrical supply areas (from floor)	6	152
(C)	Depth of supply areas (ie maximum protrusion of gas connection from wall)	2	51

### PRODUCT DIMENSIONS

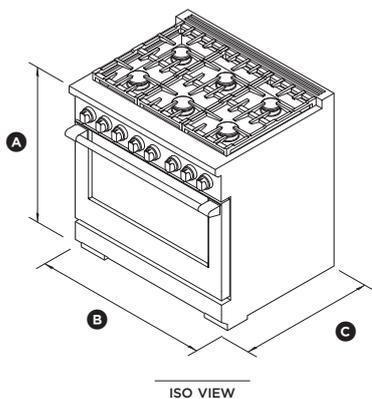

		in	mm
(A)	Overall height (from floor to cooktop, excl. grates and vent trim)	min 35 3/4 max 36 3/4	min 908 max 933
(B)	Overall width	35 7/8	911
(C)	Depth from front of range to rear (incl. vent trim, excl. dials and handle)	29 1/8	740

### CAVITY DIMENSIONS: STANDARD INSTALLATION

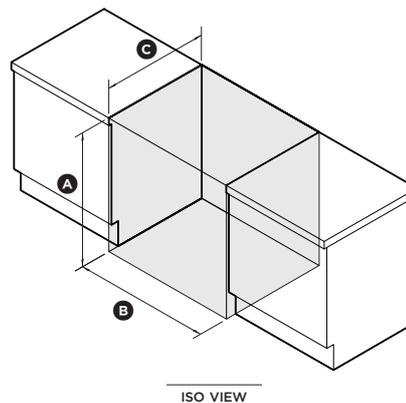

		in	mm
(A)	Overall height of cavity* • for level counter • with range levelling legs fully extended	35 3/4 36 3/4	908 933
(B)	Overall width of cavity	36	914
(C)	Maximum depth of cavity • projecting control panel • flush control panel	25 1/8 27 11/16	638 703

\*Depending on height of range.

# FISHER & PAYKEL


## PRELIMINARY SPECIFICATION GUIDE

## GAS RANGE, 48"

### SPECIFICATIONS

<b>Model No.</b>	RGV3-488-N, RGV3-488-L, RGV3-485GD-N, RGV3-485GD-L
<b>Dimensions</b>	H 35 3/4 - 36 3/4" (908 - 933mm) x W 47 7/8" (1216mm) x D 29 1/8" (740mm)
<b>Electrical</b>	
<b>Supply</b>	120/240VAC, 60Hz
<b>Service</b>	15-amp circuit

### SUPPLY AREA DIMENSIONS

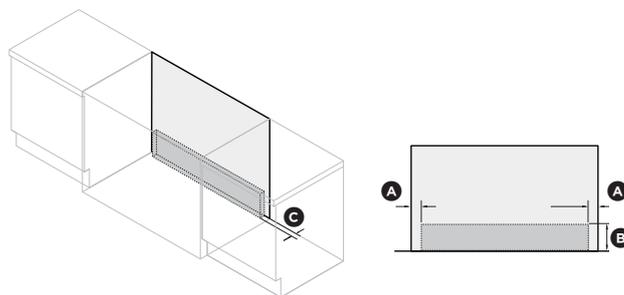


ISO VIEW

REAR OF CAVITY

		in	mm
(A)	Distance from either edge of range to supply area	1 1/2	38
(B)	Height of gas and electrical supply areas (from floor)	6	152
(C)	Depth of supply areas (ie maximum protrusion of gas connection from wall)	2	51


### PRODUCT DIMENSIONS

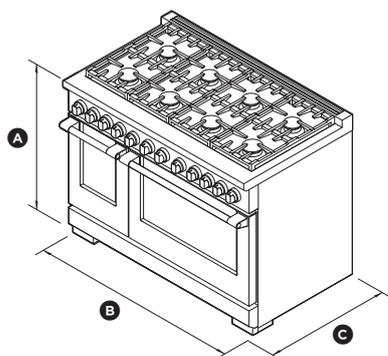

ISO VIEW

		in	mm
(A)	Overall height (from floor to cooktop, excl. grates and vent trim)	min 35 3/4 max 36 3/4	min 908 max 933
(B)	Overall width	47 7/8	1216
(C)	Overall depth (excl. handles and dials)	29 1/8	740

### CAVITY DIMENSIONS: STANDARD INSTALLATION

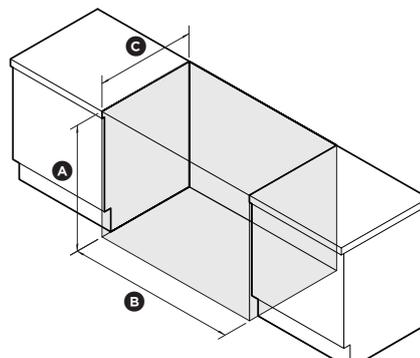

ISO VIEW

		in	mm
(A)	Overall height of cavity* • for level counter • with range levelling legs fully extended	35 3/4 36 3/4	908 933
(B)	Overall width of cavity	48	1219
(C)	Maximum depth of cavity • projecting control panel • flush control panel	25 1/8 27 11/16	638 703

\*Depending on height of range.