

Wall-Mount Canopy Vent Hood

professional series

E36WV60PPS



PRODUCT DIMENSIONS

Height	10"
Width	36"
Depth	23"

MORE EASY-TO-USE FEATURES

Centrifugal Fan

Move air quietly and quickly — up to 600 cu. ft. of air per minute.

Ducted Exhaust

Can be vented vertically or horizontally.

Signature Features



Halogen Lighting

Two halogen lights provide bright illumination of the cooktop surface.



Stainless Steel Filters

Dishwasher-safe for easy cleaning.



4-Speed Blower Control

Ultra-quiet blower gives you precise control over airflow.



Professional Design

The bold look of the canopy vent hood works in concert with your professional series range or cooktop.

36" WALL-MOUNT CANOPY VENT HOOD

FEATURES

Nominal Width	36"
Installation Type	Wall Mount
Air Discharge	Vertical or Horizontal
Air Delivery (CFM)	600
Blower Type	Centrifugal
Controls	Dial
4-Speed Blower	Yes
Dual Halogen Lights	Yes
Dishwasher-Safe Stainless Steel Filters	Yes
Exhaust Duct	External
Duct Required	3-1/4"x10" Rectangular


SPECIFICATIONS

Power Supply Location	Right Rear Top
Voltage Rating	120V/60Hz/15 or 20A
Connected Load (kW Rating)@ 120 Volts†	0.55
Amps @ 120 Volts	4.6
Shipping Weight (Approx.)	65 Lbs.

†For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.

NOTE: Always consult local and national electric codes. Check local building codes for installation requirements, as they may vary per locale. Refer to Product Installation Guide for detailed installation instructions on the web at electroluxicon.com.

Specifications subject to change.

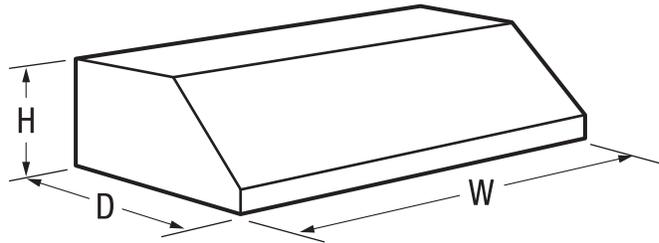

VENT EXTERIOR DIMENSIONS

Height	10"
Width	36"
Depth	23"


VENT CUTOUT DIMENSIONS

Height	10"
Width	36"

Electrolux Major Appliances, N.A.

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-877-4electrolux (1-877-435-3287) • electroluxappliances.com
 CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • electroluxappliances.ca




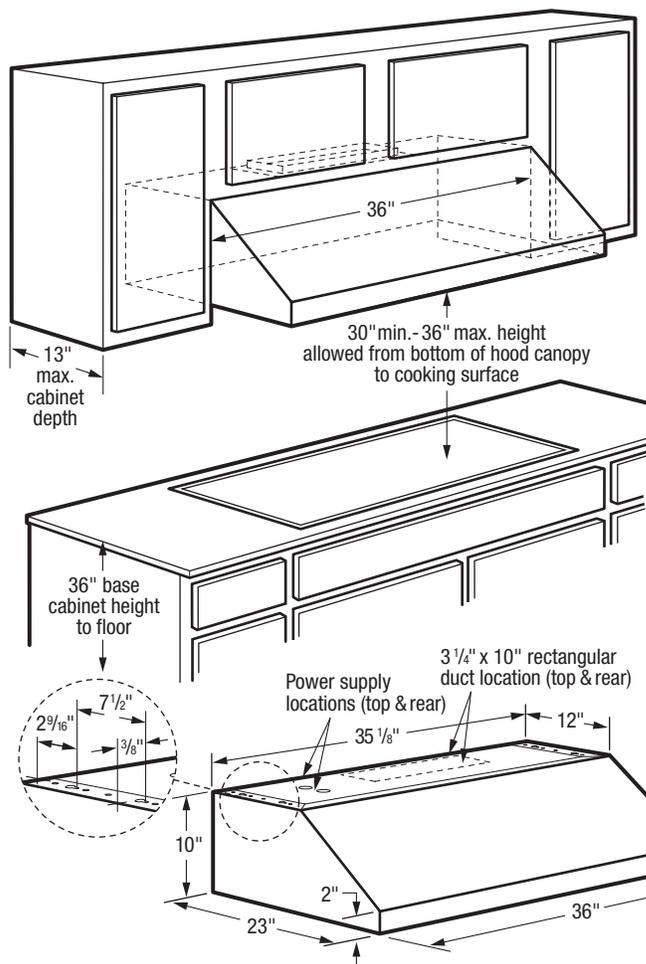


Exhaust Options

Vent hood can be vertically or horizontally ducted outside using rectangular duct. For detailed duct preparation and installation specifications, refer to installation instructions on web.

Outside Vertical – 3 1/4" x 10" Rectangular Duct Cabinet Bottom

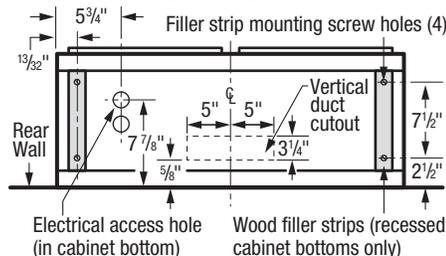

Outside Horizontal – 3 1/4" x 10" Rectangular Duct Cabinet Front

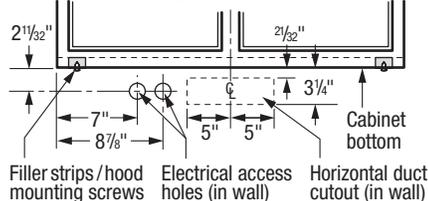

36" Wall-Mount Canopy Vent Hood Specifications

- Product Weight – 44 Lbs.
- Wall-Mount Installation – can be ducted vertically or horizontally.
- Voltage Rating – 120V/60Hz/15 or 20 Amps
- Connected Load (kW Rating) @ 120 Volts = 0.55kW
(For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.)
- Amps @ 120 Volts = 4.6 Amps
- Always consult local and national electric codes. Check local building codes for installation requirements, as they may vary per locale.
- Vent unit outside of building only.
- Exhaust Duct Required – 3-1/4"x10" Rectangular
- For most efficient airflow exhaust, use a straight run or as few elbows as possible.
- Use metallic flex ducting only to connect rigid duct directly to transitions (if allowed by code).

- Thermal breaks such as short section of nonmetallic duct, should be used in areas of extreme cold.
- Cold weather installations should have additional backdraft damper installed.
- For most efficient operation, position hood low to cooktop. Recommended installation is 30" - 36" above countertop.

Note: For planning purposes only. Refer to Product Installation Guide on the web at electroluxicon.com for detailed instructions.

Electrolux Major Appliances, N.A.

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-877-4electrolux (1-877-435-3287) • electroluxappliances.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • electroluxappliances.ca