

CLICK TO PREVIEW COLORS

FRONT OPEN

KNOB OPTIONS:

BEZEL OPTIONS:

CLICK TO PREVIEW BEZELS

PRODUCT DIMENSIONS

Width Height Depth Depth w/ Door Open 90° Oven Usable Width Oven Usable Height Oven Usable Depth Oven Actual Width Oven Actual Height Oven Actual Depth Height Between Rack Mounts Max. Height Between Racks	30 in. 37 ^{8/16} in. 28 ^{12/16} in. 45 ^{12/16} in. 23 in. 14 in. 17 in. 24 ^{14/16} in. 14 in. 17 in. 3 ^{12/16} in. 8 ^{2/16} in.	76.2cm 95.25cm 73cm 122.25cm 58.42cm 35.56cm 43.18cm 63.18cm 43.18cm 9.53cm 20.64cm
Oven Capacity*	3.53 Cu. Ft.	99.9L

*NOTE: Capacity is prior to broiler, oven rack(s), and convection fan.

Actual space excludes rack placements and accessories.

ADDITIONAL SPECS

No. of Burners 4
No. of Interior Lights 2

Rated Voltage 120V-60Hz
Amperage 15 Amps
Warranty Terms 2 Year
Certfication ETL
Conversion Kit Yes

FEATURES:



PRECISION TEMPERATURE
Take full control of your kitchen
with precise temperature reading.



EASY GLIDE RACKS

Easy glide racks deliver quality and convenience with consistent ease.



EDGE-TO-EDGE GRATES

Edge to edge grates provide a truly level cooktop, perfect for easily transferring pots and pans.



CONVERTIBLE POWER


Diversify your kitchen with a range which supports natural gas and liquid propane conversion.

CLICK TO

KNOBS


PREVIEW

INSTALLATION GUIDE

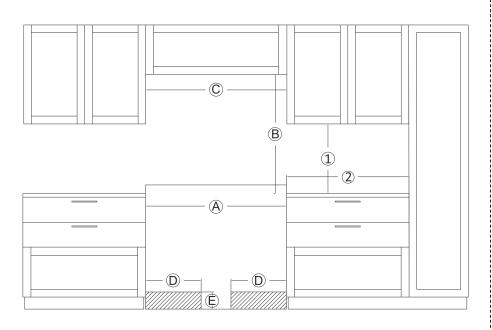


POSITION	DIMENSIONS	DESCRIPTIONS
1	18"/45.7cm	Minimum distance to bottom edge of top cabinet
2	12"/30.48cm	Minimum distance from cooktop surface
Α	30"/76.20cm	Width of cabinet opening
В	26"-32" 66.04-81.28cm	Min. and max. height between cooktop and hood
С	30"/76.20cm	Minimum width of the hood area
D	Approx. 10 ^{13/16} /27.4cm	Maximum gas/elec. connection width from right and left
E	Approx. 4 8/16/11.5cm	Maximum gas/elec. connection height

DIMENSIONS:

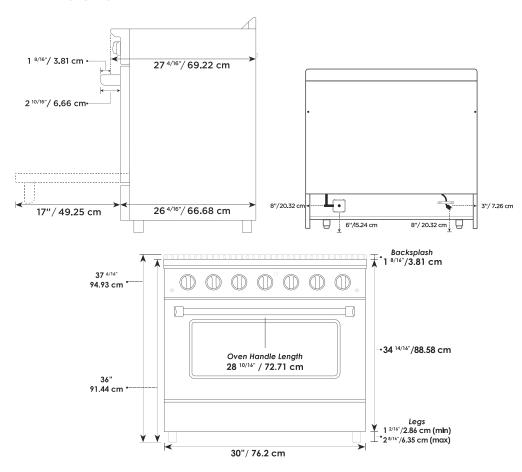

BURNER MAP:



BURNER 1 LARGE (15,000 BTU)

BURNER 2 LARGE (15,000 BTU)

BURNER 3 SMALL (9,000 BTU)

BURNER 4 SMALL (9,000 BTU)