Miele

Futura Series

Fully Integrated Dishwasher

PROFILINE PG 8083 SCVi




mieleusa.com

Futura Series Dishwashers
Model Overview

		CLASSIC	CRYSTAL	DIMENSION	DIMENSION SLIMLINE	DIAMOND	PROFI LINE
Baskets	FlexiCare	●					
	FlexiCare Plus		●		●		
	FlexiCare Premium			●			
	FlexiCare Deluxe					●	●
Cutlery	Cutlery basket	●	●				
	Cutlery tray	●	●		●		
	3D cutlery tray			●		●	●
Convenience	AutoClose					●	●
	BrilliantLight					●	●
	Delay Start	●	●	●		●	●
	RemoteVision™					●	
	ComfortClose	●	●	●		●	●
	Perfect GlassCare		●	●	●	●	●
	Water softener		●	●	●	●	●
	ADA compliant*	●*		●*	●		
	Q Acoustic ratings	Q1	Q2	Q4	Q3	Q5	Q1
Sensors	AutoSensor	●	●	●	●	●	
	SensorDry			●		●	
	Automatic Load-Size Sensor					●	
Finishes	Pre-finished (Black or White)	●	●				
	Pre-finished (Clean Touch Steel™)	●	●	●			
	Integrated - I (Clean Touch Steel™)			●	●	●	
	Fully Integrated - Vi (Custom Panel)	●		●	●	●	●
	Fully Integrated - SC SF (Clean Touch Steel™)	●	●	●		●	
Programs	Normal	●	●	●	●	●	●
	Express		●		●	●	
	Rinse & Hold	●	●	●	●	●	
	SaniWash	●	●	●	●	●	
	Pots & Pans	●	●	●	●	●	●
	Economy	●					
	China & Crystal		●	●	●	●	●
	Turbo Mode	●	●	●		●	
	Intensive Mode			●		●	
Diamond Programs	ExtraQuiet			●		●	
	Heavy Soil					●	
	SensorWash					●	
	Light					●	
	Energy Saver					●	
	Plastics					●	●
	Starch/Cheese					●	
	Tall Items					●	
	Glass - No Rinse Aid (Warm)					●	
	Glass - No Rinse Aid (Cold)					●	
ProfiLine Programs	ProSpeed 23 minute cycle						●
	Universal						●
	Sanitize						●
	Beer Glasses						●
Drying	CleanAir™	●	●	●	●	●	●
	Advanced CleanAir™					●	●
	AutoOpen™ Drying			●		●	●

* Classic G 4281 SCVi and Dimension G 5670 SCVi are ADA compliant

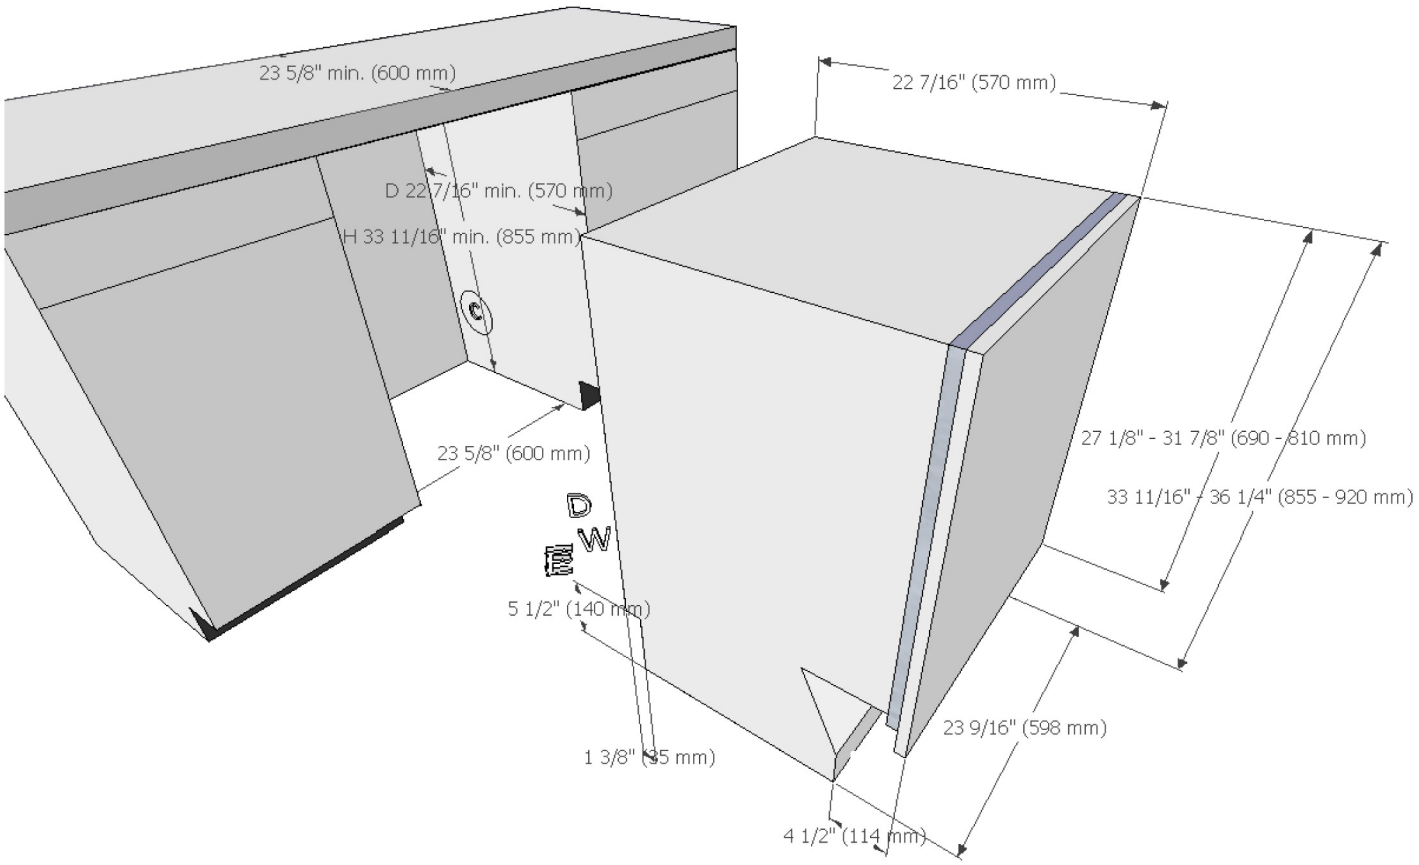

Location Codes

C – Cutout 2 1/4” x 4” (57 mm x 102 mm) for water, drain and electric pass-through.

Adjust according to water and drain location.

D - 5 foot (1.5 meter) flexible drain hose connects lower center rear.
E - 5 foot (1.5 meter) power supply cord connects lower left. Depending on version ordered (please specify) units comes with

1) 120V 3 wire molded plug - NEMA 5-15P (Miele article number: 61808365USA)
2) 208-240V 4 wire molded plug - NEMA 14-30P (Miele article number: 61808366USA)

W - 5 foot (1.5 meter) “Double Waterproof” flexible water intake hose connects lower center rear. The water hose comes equipped with a ¾” female hose thread connector.


Notes

All installations must be done in accordance with local codes.

Drawing is not to scale

Custom Panel Installations

Some Miele dishwashers do not come equipped with a front panel. These dishwashers are designed to accept a custom door panel supplied by the cabinet maker. Miele has a unique panel integration system which allows the dishwasher to align with the surrounding cabinets.

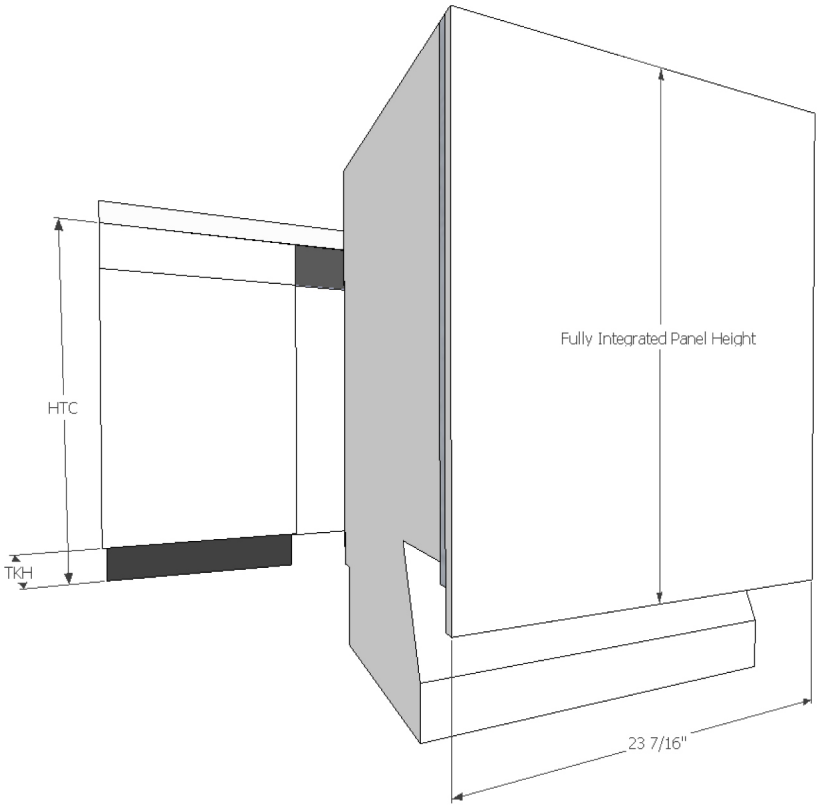

Width: 23 7/16" (598 mm) in all cases

Thickness: ¾" (19 mm) in all cases

Height: Determined using the following calculation:

Panel Height = HTC – TKH

HTC = Height to the underside of countertop

TKH = Toe kick height

Note: Control panel is along the top edge of the unit. It is not visible when the unit is closed. A handle MUST be located on the front panel in order to open the unit.

Maximum panel height: 31 7/8" (809 mm)


Minimum panel height: 27 3/16" (690 mm)

Maximum panel weight: 21 Pounds (9.5 kg)

GFVI Installations

Miele offers pre-fabricated stainless steel panels for all fully integrated units. These panels are designed for various toe-kick heights and offer a choice of handle options.

Drawing is not to scale

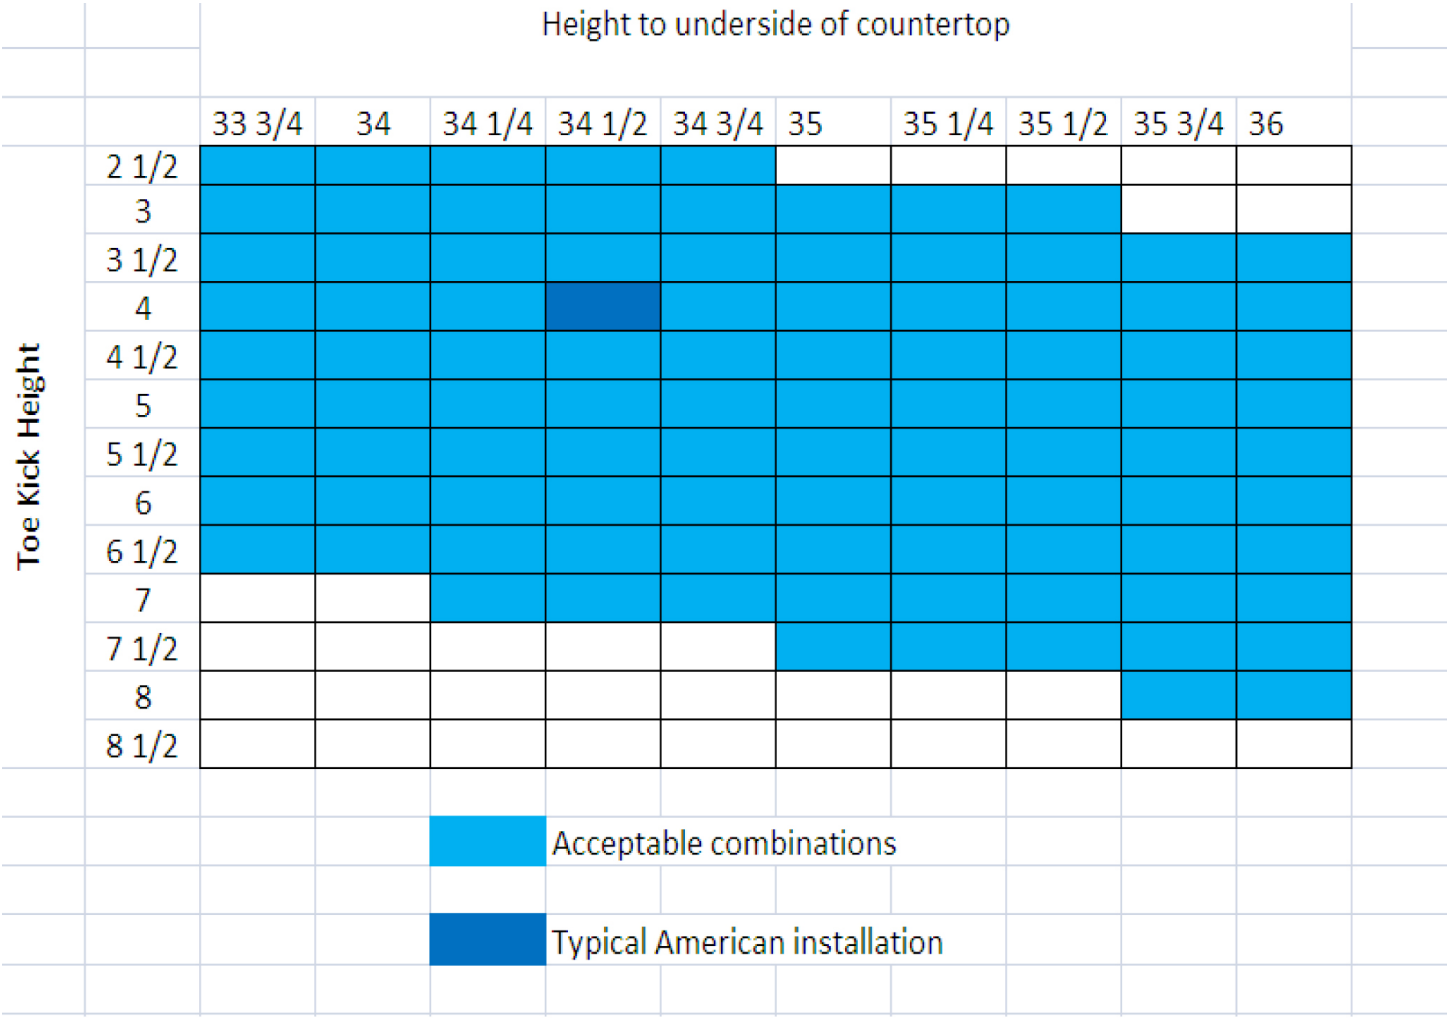
Height to underside of countertop
33 3/4
34
34 1/4
34 1/2
34 3/4
35
35 1/4
35 1/2
35 3/4
36
Toe Kick Height
2 1/2
3
3 1/2
4
4 1/2
5
5 1/2
6
6 1/2
7
7 1/2
8
8 1/2
Acceptable combinations
Typical American installation