FRIGIDAIRE

GALLERY

FRIGIDARE

1.9 Cu. Ft. Over-The-Range Microwave with Sensor Cook

Over-The-Range Microwave

Available Products: GMOS1964AD, GMOS1964AF

Available Colors: Black Stainless Steel, Stainless Steel

Version: 03/23

| Product Specifications | | | | |
|-------------------------------|------------------------|---|-------------------|--|
| Cooking Controls | | Microwave Cooking | | |
| Clock | Yes | Beverage | Yes | |
| Defrost Time | Yes | Melt / Soften | Yes | |
| Defrost Weight | Yes | Popcorn | Yes | |
| Denost Weight | 163 | Potato | Yes | |
| Ventilation System | | Reheat | Yes | |
| Ductless Vent | Yes | Sensor Cooking | Yes | |
| Ducted Vent | Yes | Veggies | Yes | |
| Exhaust Fan Speeds | 3 | 1698169 | 100 | |
| Minimum Air Flow Capacity | 105 CFM | Microwave Control Features | | |
| Maximum Air Flow Capacity | 400 CFM | + 10 Seconds | Yes - One Touch | |
| Charcoal Filter Included | Yes | + 30 Seconds | Yes - One Touch | |
| Grease Filter Included | Yes | Quick Start | Yes - One Touch | |
| Grease Filter Quantity | 2 | Quick start | 163 - Olie Touch | |
| Grease Filter Dishwasher Safe | Yes | Display | | |
| Removable Grease Filter | Yes | Control Location | Bottom | |
| IVEIIIOAGOIG GIEGSE L'IIICI | ics | Display Interface Color | White | |
| Additional Settings | | Display Type | Capacitive Touch | |
| Child Lock | Yes | Display Type | Capacitive roucii | |
| Clock Display On / Off | Yes | Internal Constitutions | | |
| Clock Settings | Yes | Internal Specifications | T. 71 ** | |
| Demo On / Off | Yes | Interior Color | White | |
| Setting Turntable On / Off | Yes | Interior Light Quantity | 1 | |
| Setting Weight Lb / Kg | Yes | Interior Light Type | LED | |
| Surface Cooking Light | Yes | Interior Light Wattage Turntable Diameter | 1.2 Watts | |
| Timer On / Off | Yes | | 13 6/10" | |
| Vent Fan | Yes | Turntable Material | Glass | |
| vent ran | 163 | | | |
| Exterior | | Dimensions and Volume | | |
| | Cid- C- in a D | Height | 15 5/8" | |
| Door Swing | Side-Swing Door Yes | Width | 29 7/8" | |
| Zero Clearance Door Opening | Yes | Depth | 15 3/4" | |
| | | Depth With Door 90° Open | 44 3/8" | |
| Surface Light System | | Microwave Interior Height | 10 9/16" | |
| Lighting Type | LED | Microwave Interior Width | 21 3/32" | |
| Number of Lights | 2 | Microwave Interior Depth | 14 9/16" | |
| Number of Light Settings | 3 | Microwave Capacity | 1.9 Cu. Ft. | |
| Electrical Specifications | | Installation | | |
| Amps @ 120 Volts | 13.5 Amps | Power Supply Connection Location | Top Center | |
| Connected Load @ 120V | 1.55 kW | | - | |
| Voltage Rating | 120 V | | | |
| THT O 100 TT I: | 4 000 117 | | | |

Watts @ 120 Volts

1,000 Watts

| 1.9 Cu. Ft. Over-The-Range Microwave with Sensor Cook | Over-The-Range Microwave | |
|---|--|--|
| Available Products: GMOS1964AD, GMOS1964AF | Available Colors: Black Stainless Steel, Stainless Steel | |
| Version: 03/23 | | |

General Specifications

| Prop 65 Label | Yes |
|------------------|--------|
| Warranty - Labor | 1 Year |
| Warranty - Parts | 1 Year |


1.9 Cu. Ft. Over-The-Range Microwave with Sensor Cook

Available Products: GMOS1964AD, GMOS1964AF

Available Colors: Black Stainless Steel, Stainless Steel

Version: 03/23

Installation Diagram

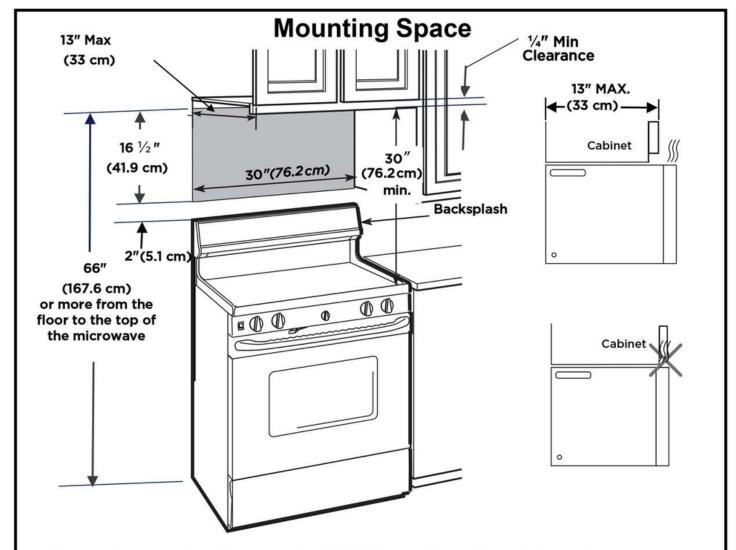

- The space between the cabinets must be 30" (76.2 cm) wide and free of obstructions.
- If you are going to vent your microwave oven to the outside, see Hood Exhaust Section for exhaust duct preparation
- When installing the microwave oven beneath smooth, flat cabinets, be careful to follow the instructions on the top cabinet template for power cord clearance.
- As a guide to installation, see page 26 for Mounting Template Information.
- If the cabinet depth, including the cabinet doors, is more than 13", then the unit must be spaced out from wall using adequate materials supporting 150 lbs to allow proper top vent air exhaust/ intake.