


BREEZE II

For superior value in a quiet, high-performance package, Breeze II comes equipped with upgraded three-speed, 400-cfm blowers, convenient dishwasher-safe aluminum filters and a timed delay-off feature to automatically clear the air and power down after five minutes. Sleek, integrated controls simplify cleanup, and the two-level halogen bulbs let you set a low-key mood when the time is right.



ESSENTIALS

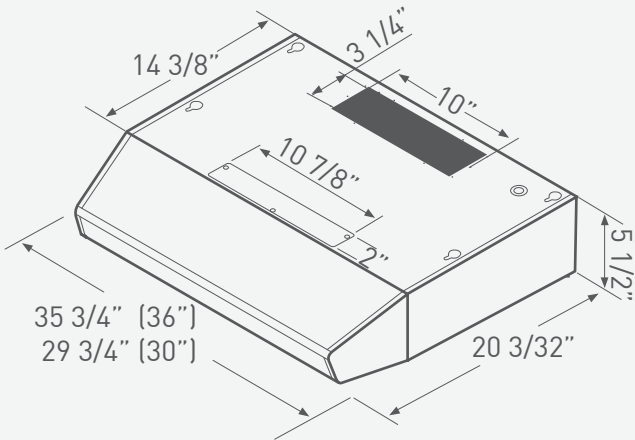

BREEZE II

UNDER CABINET	MODEL	AK1200	AK1236
	SIZE	30"	36"
	NET WIDTH	29 3/4"	35 3/4"
	PERFORMANCE		
	Internal Blower	175 - 400 CFM	175 - 400 CFM
	Internal Blower Sones	1.9 - 4.5	1.9 - 4.5
	COLOR		
	Black, White, Stainless Steel	B, W, SS	B, W, SS
	FEATURES		
	Controls	Electronic Touch	Electronic Touch
	Speed Levels	3	3
	Auto Delay-Off	Yes	Yes
	Lighting	Halogen, 35W x 2	Halogen, 35W x 2
	Dual-Level Lighting	Yes	Yes
	Filters	Aluminum Mesh x 2	Aluminum Mesh x 2
	Recirculating	Yes	Yes
	Duct Cover Extension	NA	NA
	DUCT SPECIFICATIONS		
	Internal Blower - Vertical	3 1/4" x 10"	3 1/4" x 10"
	Internal Blower - Horizontal	3 1/4" x 10"	3 1/4" x 10"
	AC INPUT	120V - 60Hz	120V - 60Hz
	AC POWER	Max. 157W, 1.35 Amps	Max. 157W, 1.35 Amps
	OPTIONAL ACCESSORIES		
	Recirculating Kit	OAK11-21001	OAK11-21001
Mounting Heights			
	Min. height 24" from cooking surface. Hood mounted 60" from floor.	Max. height 32" from cooking surface. Hood mounted 68" from floor.	