



4.7 Cu. Ft. I.E.C Top Load Washer

Top Load Washer

Available Products: FLVW7000AW

Available Colors: White

Version: 10/25

Product Specifications

Washer

Agitator	Yes
Drum Material	Stainless Steel
Maximum Spin Speed	710 RPM
Water Level Adjustment	Yes

Washer Options

Chime	Yes
Extended Spin	Yes
Extra Rinse	Yes
Fabric Softener	Yes

Temperature Settings

Cold	Yes
Tap Cold	Yes
Warm	Yes
Hot	Yes

Dispenser

Bleach Dispenser	Yes
Detergent Dispenser	Yes
Fabric Softener Dispenser	Yes

Dimensions and Volume

Height	43 1/2"
Height With Lid 90° Open	58"
Width	25 3/4"
Depth	27"
Washer Drum Capacity I.E.C.	4.7 Cu. Ft.

Energy Data

Integrated Modified Energy Factor	1.57
Integrated Water Factor	6.5
kWh/year	120 kWh
Water Usage/Year	7862 Gallons

Safety Certifications and Approvals

UL Listed	Yes
-----------	-----

Washer Cycles

Cycle Count	8
Bulky	Yes
Clean Washer	Yes
Delicates	Yes
Fast Wash	Yes
Heavy	Yes
Normal	Yes
Rinse and Spin	Yes
Whites	Yes

Soil Levels

Light	Yes
Normal	Yes
Heavy	Yes
Extra Heavy	Yes

Controls

Child Lock	Yes
Cycle Status Lights	Yes
Pause Function	Yes
Power On/Off	Yes
Start	Yes

Electrical Specifications

Minimum Circuit Required	10 Amps
Voltage Rating	120 V

General Specifications

Chime On / Chime Off	Yes
Leveling Legs	Yes
Prop 65 Label	Yes
Warranty - Labor	1 Year
Warranty - Parts	1 Year

Right to Repair Details

Right to Repair	Available - Visit frigidaire.ca/right-to-repair for more information
-----------------	---

For planning purposes only. We reserve the right to change specifications or discontinue models without notice.

Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.ca

Electrolux Major Appliances, N.A.

CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

Installation Diagram


Clearance requirements

► IMPORTANT


DO NOT INSTALL YOUR WASHER:

- 1 In an area exposed to dripping water or outside weather conditions. The ambient temperature should never be below 60° F (15.6° C) to maximize detergent effectiveness.
- 2 In an area (garage or garage-type building) where gasoline or other flammables (including automobiles) are kept or stored.
- 3 On carpet. Floor MUST be solid with a maximum slope of 1 inch (2.5 cm). To minimize vibration or movement, reinforcement of the floor may be necessary.

MINIMUM INSTALLATION CLEARANCES - Inches (cm)				
	SIDES	REAR	TOP	FRONT
Alcove	1" (2.5 cm)	6" (15.2 cm)	24" (61 cm)	n/a
Closet	1" (2.5 cm)	6" (15.2 cm)	24" (61 cm)	2" (5.1 cm)

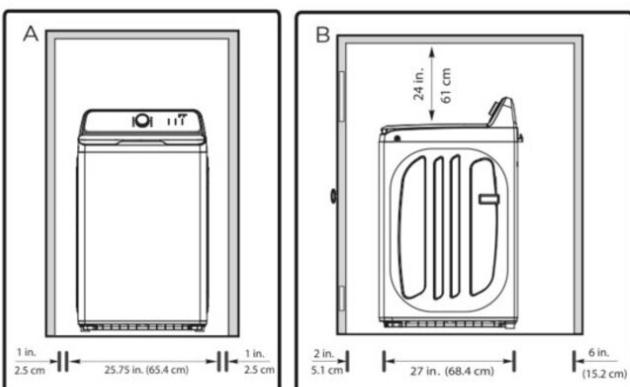

Washer Dimensions

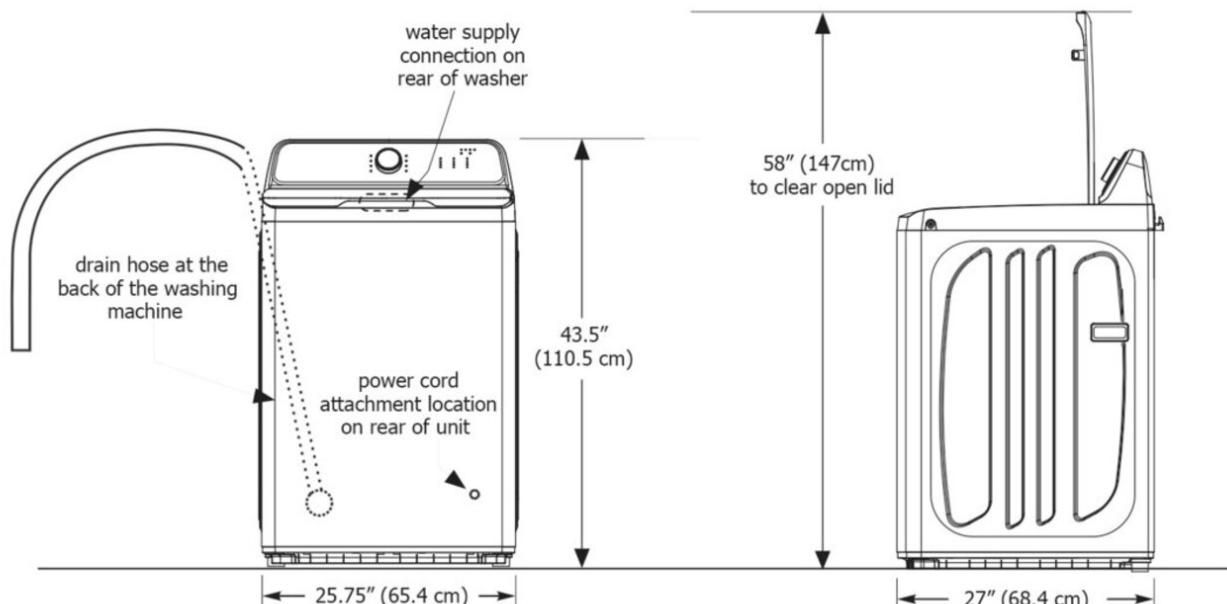

¹Drain hose length on washer approximately 66.93 inches (170 cm).

²Power supply cord length approximately 72.8 inches (185 cm).