

BP 8000 Series

Reinventing a Legend



L to R:
BP-8080ST, BP-8060ST,
BP-8040ST, BP-8020ST,
SR-8040BP (top), CS-8060HD

The BP series launched Definitive Technology into becoming the best-selling and most honored brand of audiophile-grade speakers in the US. Now we've improved every part in our award-winning line of Bipolar SuperTowers® and matching centers and surrounds.

Second-generation patented BDSS drivers, built-in powered subwoofers, Digital Signal Processing Class D amplifiers, and stunning new styling have all come together, setting a new standard in performance and value.

The new BP family includes four SuperTowers® with built-in powered subwoofers for the ultimate in space-saving convenience and heart-pounding performance. There are three perfectly matched centers, two with built-in powered woofers, as well as two bipolar surround speakers to choose from to create a multi-channel system that perfectly meets your needs.




Definitive's bipolar speaker technology produces a huge three-dimensional stereo soundstage for every listener in the room to bring your music and movies to life!

BIPOLAR SERIES

BIPOLAR SERIES

Second-Generation BDSS Driver

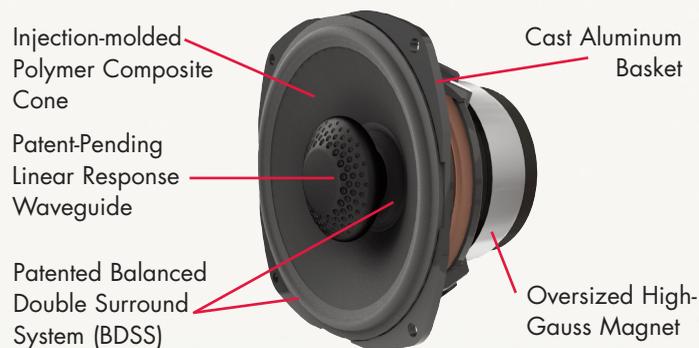

Preliminary Specifications	BP-8080ST	BP-8060ST	BP-8040ST	BP-8020ST
Dimensions (cabinet only, no stabilizer feet)	48 1/4" H x 7" W x 16 5/16" D (122.5cm H x 17.8cm W x 41.3cm D)	44 3/16" H x 5 15/16" W x 13 7/16" D (112.2cm H x 15.1cm W x 34.1cm D)	39" H x 5 5/8" W x 11 5/8" D (99.1cm H x 14.2cm W x 29.4cm D)	35 7/8" H x 5 5/8" W x 11 5/8" D (91cm H x 14.2cm W x 29.4cm D)
Dimensions (with stabilizer feet)	48 1/4" H x 12 1/8" W x 16 5/16" D (122.5cm H x 30.8cm W x 41.3cm D)	44 3/16" H x 11 1/16" W x 13 7/16" D (112.2cm H x 28.1cm W x 34.1cm D)	39" H x 10 3/4" W x 11 5/8" D (99.1cm H x 27.2cm W x 29.4cm D)	35 7/8" H x 10 3/4" W x 11 5/8" D (91cm H x 27.2cm W x 29.4cm D)
Front Array Driver Complement	2 each 5 1/4" (13cm) BDSS midrange drivers, 1 each 1" (25mm) aluminum dome tweeter	2 each 4 1/2" (11.4cm) BDSS midrange drivers, 1 each 1" (25mm) aluminum dome tweeter	2 each 3 1/2" (9cm) BDSS midrange drivers, 1 each 1" (25mm) aluminum dome tweeter	2 each 3 1/2" (9cm) midrange drivers, 1 each 1" (25mm) aluminum dome tweeter
Rear Array Driver Complement	1 each 5 1/4" (13cm) BDSS midrange driver, 1 each 1" (25mm) aluminum dome tweeter	1 each 4 1/2" (11.4cm) BDSS midrange driver, 1 each 1" (25mm) aluminum dome tweeter	1 each 3 1/2" (9cm) BDSS midrange driver, 1 each 1" (25mm) aluminum dome tweeter	1 each 3 1/2" (9cm) full-range midrange driver
Subwoofer System Driver Complement	1 each 12" (30cm) active subwoofer driver pressure-coupled to 2 each 12 1/2" (32cm) low-bass radiators	1 each 10" (25cm) active subwoofer driver pressure-coupled to 2 each 10" (25cm) low-bass radiators	1 each 8" (20cm) active subwoofer driver pressure-coupled to 2 each 8" (20cm) low-bass radiators	1 each 8" (20cm) active subwoofer driver, vented
Frequency Response	18Hz – 30kHz	20Hz – 30kHz	25Hz – 30kHz	30Hz – 30kHz
Sensitivity	92 dB	92 dB	92 dB	92 dB
Nominal Impedance	8 ohms	8 ohms	8 ohms	8 ohms
Recommended Input Power	20 – 400 WPC	20 – 300 WPC	20 – 300 WPC	20 – 250 WPC
Internal Amplifier Power	455	300	300	150

Preliminary Specifications	CS-8080HD	CS-8060HD	CS-8040HD	SR-8080BP	SR-8040BP
Dimensions	6 3/4" H x 23 1/2" W x 14" D (17.15cm H x 59.7cm W x 35.6cm D)	5 3/4" H x 21 1/8" W x 12" D (14.5cm H x 53.7cm W x 30.4cm D)	5 3/4" H x 21 1/8" W x 12" D (14.5cm H x 53.7cm W x 30.4cm D)	15 5/8" H x 9" W x 6 1/16" D (39.7cm H x 22.8cm W x 15.5 cm D)	9 1/2" H x 7 13/16" W x 5 3/8" D (24cm H x 19.8cm W x 13.5cm D)
Driver Complement	2 each 5 1/4" (13cm) BDSS midrange drivers, 1 each 1" (25mm) aluminum dome tweeter	2 each 4 1/2" BDSS bass/midrange drivers, 1 each 1" aluminum dome tweeter	2 each 4 1/2" BDSS bass/midrange drivers coupled to 1 each 5" x 10" bass radiator, 1 each 1" aluminum dome tweeter	2 each 4 1/2" drivers, 2 each 1" aluminum dome tweeters	2 each 3 1/2" drivers, 2 each 1" aluminum dome tweeters
Subwoofer System Driver Complement	1 each 5" x 10" active subwoofer driver, pressure coupled to 2 each 5" x 10" low-bass radiators	1 each 8" active woofer, vented	n/a	n/a	n/a
Frequency Response	20Hz – 30kHz	30Hz – 30kHz	40Hz – 30kHz	40Hz – 30kHz	50Hz – 30kHz
Sensitivity	92 dB	92 dB	92 dB	92 dB	92 dB
Nominal Impedance	8 ohms	8 ohms	8 ohms	8 ohms	8 ohms
Recommended Input Power	20 – 300 WPC	20 – 250 WPC	20 – 200 WPC	20 – 200 WPC	20 – 150 WPC
Internal Amplifier Power	300	150	n/a	n/a	n/a