


HOME THEATER POWER MANAGEMENT

Model: **MR4000**

Specifically designed and engineered to provide protected and filtered power to your home theater system.

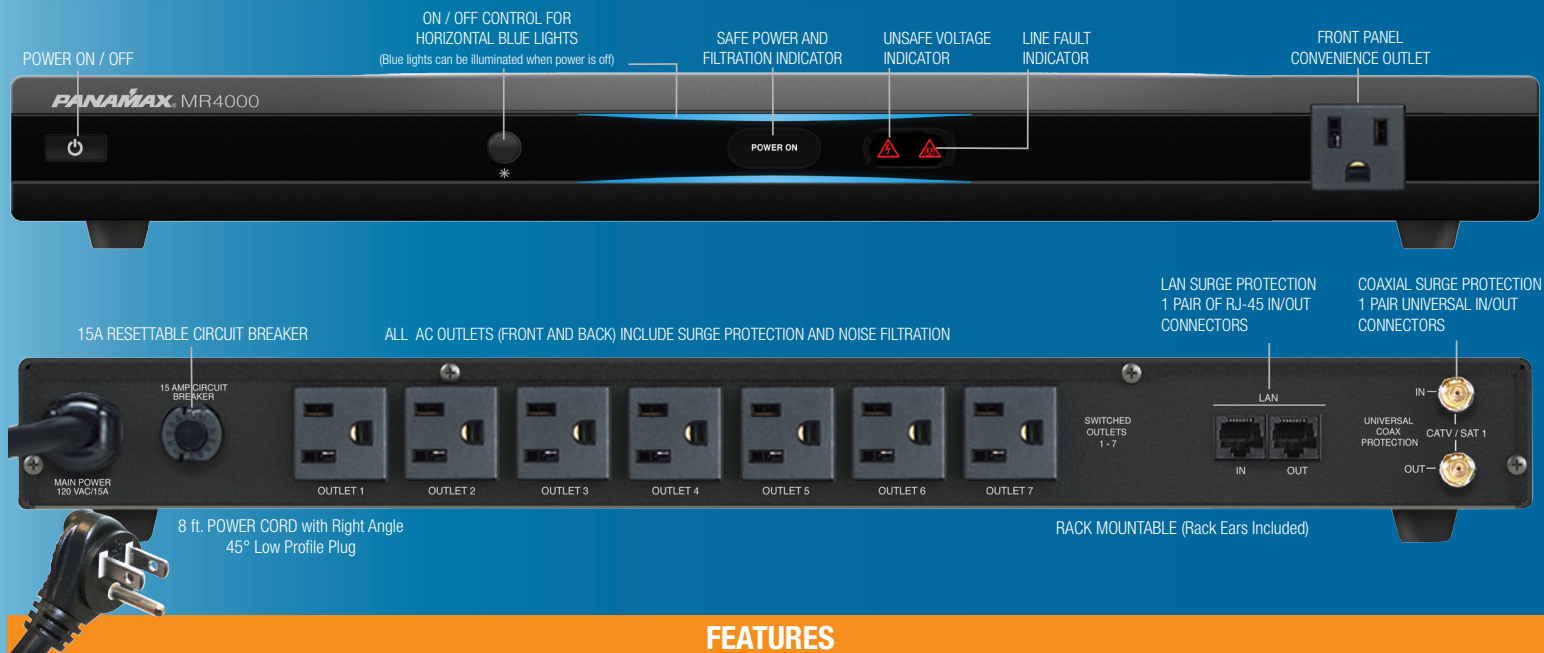

FEATURES

- 8 Protected & Filtered Power Outlets
- Exclusive Automatic Voltage Monitoring (AVM)
- Protect or Disconnect™ Technology
- Panamax Level 2 Noise Filtration
- Antenna, Cable, or Satellite and LAN Signal Protection
- 8 ft. Power Cable with Low Profile Plug

SPECIFICATIONS



AC PROTECTION

Protect or Disconnect Circuitry	Yes
Automatic Voltage Monitoring Circuit	Yes
Overvoltage Shutoff	140V $\pm$ 4
Undervoltage Shutoff	100V $\pm$ 3V
Thermal Fusing	Yes
Line Voltage	120VAC, 50/60HZ
Initial Clamping Level	200V Peak, 141VRMS
Voltage Protection Rating (UL 1449 3rd Edition, 3,000A)	330V L-N, 330V L-G, 400V L-G, 400V N-G
Protection Modes	L-N, L-G, N-G
Maximum Current Rating	15A (1800W)
EMI/RFI Noise Filtration	Panamax Level 2 Noise Filtration*
Response Time	< 1ns
Single Pulse Energy Dissipation	1350 Joules
Peak Impulse Current	52,000 A



LAN PROTECTION

Clamping Level	50V
Compatibility	10/100bT
Wires Protected	8-Wires
Connectors	RJ-45



UNIVERSAL COAX PROTECTION

HD 1080 i/p Ready	Yes
Bidirectional	Yes
Shielded	Yes
Clamping Level	75V
Frequency Range	0MHz - 2.2 GHz
Insertion Loss	<0.5 dB
Connections	Female "F", Gold Plated

WEIGHTS, DIMENSIONS AND UPC CODES

MODEL	UNIT DIMENSIONS	WEIGHT	CARTON DIMENSIONS	WEIGHT	UPC	MASTER PACK QTY	MASTER PACK UPC
MR4000	6"l x 17"w x 1.75"h 2.19"h with feet	6.5 lbs	12" x 19.5" x 4.625"	8 lbs	050616008921	4	50050616008926

*Go to www.panamax.com for detailed noise filtering information.

Specifications subject to change due to product upgrades and improvements



1800 South McDowell Blvd., Petaluma, CA 94954 800-472-5555 707-283-5900 Fax 707-283-5901 www.panamax.com

2012 Panamax LLC. Panamax and the Panamax logo are registered US trademarks of Panamax

Part# L653 Rev. C