



CONVENIENT DRYING OPTIONS WITH A SINGLE TOUCH

7.5 Cu. Ft. Front Load Dryer

MLE45N1BWW 7.5 Cu. Ft. Dryer (Electric)

MLG45N1BWW 7.5 Cu. Ft. Dryer (Gas)

Our versatile, 7.5 Cu. Ft. Dryer has 12 pre-set cycles and 5 temperature settings along with a convenient auto-dry feature. The reversible door can be adjusted to open from the left or right for maximum placement versatility.

Large, 7.5 Cu. Ft. Capacity

Dry everything at once including king-size comforters, towels and linens with the extra-large drum.

Electronic Controls

Sleek, modern electronic controls provide cycle status at a glance.

Favorite Cycle

Remembers your favorite dryer settings for one-click convenience.

Sensor Dry

A sensor detects when your clothes are dry and automatically stops the dryer saving energy.

Wrinkle Care

Reduce wrinkling by providing extra tumbling in unheated air at the end of the cycle.

12 Total Cycles

8 Sensor Dry: Normal, Delicate, Casual, Sanitize, Heavy Duty, Bulky, Towels, and Baby Care

4 Manual: Quick Dry, Time Dry, Air Fluff, and Towel Warmer



7.5 Cu. Ft. Front Load Dryer

Models MLE45N1BWW, MLG45N1BWW

SPECIFICATIONS

Models		MLE45N1BWW	MLG45N1BWW
Fuel Type		Electric	Gas
UPC		8-10004818903	8-10004818910
Color		White	White
PERFORMANCE			
ENERGY STAR®		-	-
FEATURES			
Capacity (cu. ft.)		7.5	7.5
No. of Cycles	Total	8	8
	Sensor Dry	Normal, Delicate, Casual, Heavy Duty, Bulky	Normal, Delicate, Casual, Heavy Duty, Bulky
	Manual Dry	Quick Dry, Time Dry, Air Fluff	Quick Dry, Time Dry, Air Fluff
No. of Options		4 (My Cycle, Child Lock, Time Adjust, Wrinkle Care)	4 (My Cycle, Child Lock, Time Adjust, Wrinkle Care)
Sensor Dry		Yes	Yes
No. of Dryness Level Selections		4 (Very Dry, More Dry, Normal, Less Dry)	4 (Very Dry, More Dry, Normal, Less Dry)
No. of Temperature Selections		4 (High, Medium, Low, No Heat)	4 (High, Medium, Low, No Heat)
Interior Light(s)		-	-
Lint Filter		Yes	Yes
Lint Filter Indicator Light		Yes	Yes
My Cycle		Yes	Yes
Steam Function		-	-
Reversible Door		Yes	Yes
3-Way Venting		Yes	Yes
Exhaust Vent Location		Rear (Bottom, Left)	Rear (Bottom, Left)
End-Of-Cycle Signal		Yes	Yes
ELECTRICAL			
Voltage (V)		120/240	120
Amperage (A)		30	15
UL Rated		Yes	Yes
Power Cord Included		-	Yes
PHYSICAL ATTRIBUTES			
Tub/Drum Material		Aluminized Alloy Steel	Aluminized Alloy Steel
Drum Rear		Stainless Steel	Stainless Steel
Double Layer Drying Rack		-	-
Control Panel / Color		Dial, Membrane / White	Dial, Membrane / White
Door / Trim		Injection White	Injection White
Color		White	White
Dimensions (W*D*H)	in	27 x 30.1 x 43	27 x 30.1 x 43
	cm	68.6 x 76.5 x 109.2	68.6 x 76.5 x 109.2
Warranty		Parts & Labor, 1 Year	Parts & Labor, 1 Year


4.5 Cu. Ft Top Load Washer & 7.5 Cu. Ft. Dryer

Models MLV45N1BWW, MLE45N1BWW, MLG45N1BWW

Alcove or Closet or Wall Insert/Recessed Installations

Minimum clearances between the unit and adjacent walls or other surfaces:

Sides (in / cm)	1 / 2.5	Rear (in / cm)	6 / 15.2
Top (in / cm)	24 / 61	Closet Front (in / cm)	2 / 5.1
Gap between the end of water valve and the wall (in / cm)		Case 1: If you connect the supply hose after you install your washer: Over 3.9 in. (10 cm) Case 2: If you connect the supply hose before you install your washer: Over 2.8 in. (7 cm)	

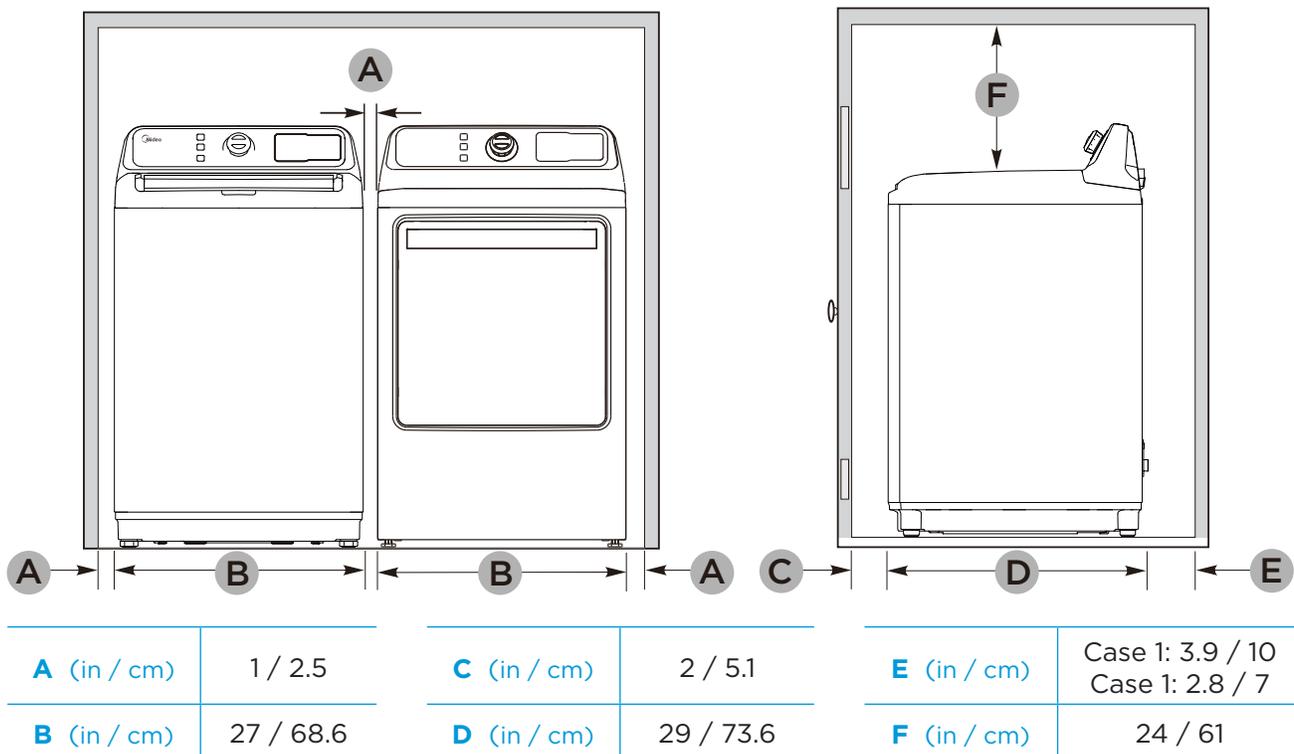

WARNING

- The dryer must be exhausted to the outside to reduce risk of fire when installed any place inside the house.
- No other fuel-burning appliance should be installed in the same closet as the dryer.