

Built-In
36" Bottom Mount

KF 1913 SF / KF 1903 SF



Built-In 36" Bottom Mount KF 1913 SF / KF 1903 SF



Features:

- MasterCool controls
- ClearView lighting system
- Drop and Lock Shelves
- SmartFresh storage drawers
- FullView storage drawers
- Ice maker
- RemoteVision capable
- Acoustic door and temperature alarm
- Optical door and temperature alarm
- Energy Star

SPECIFICATIONS

KF 1903 SF — Item 38190311USA - Right Hinged

KF 1913 SF — Item 38191311USA - Left Hinged

Overall Unit Width - Excluding Fascia Dimension 35³/₄" (908 mm)

Overall Unit Height - Excluding Fascia Dimension 83¹/₂" - 85³/₁₆" (2121 mm - 2165 mm)

Overall Unit Depth - Excluding Fascia Dimension 24" (610 mm)

Overall Fascia Dimensions 36¹/₂" (927 mm) W x 84" - 85¹¹/₁₆" (2134 mm - 2176.5 mm) H x ³/₄" (19 mm) D

Niche

Minimum Cabinet Opening Width 36" (915 mm)

Minimum Cabinet Opening Height 83⁵/₈" (2124 mm)

Minimum Cabinet Opening Depth 24" (610 mm)

Plumbing

Water Supply Requirements

Connect to a cold water supply only. Must be connected to a shut-off valve. The water shut-off valve must be accessible after installation. The water pressure must be between 25 psi (1.7 bar) and may not exceed 80 psi (5.5 bar). If the pressure is higher than 80 psi (5.5 bar), a pressure reducing valve must be installed.

Water Connection Line

Standard 1/4" O.D flexible water line. The maximum outer diameter of the water pipe (without fittings): 3/8" (10 mm). Water line is not included.

Electrical

Electrical Requirements - Volts/Amps

110V / 120V, 60Hz, 15 Amps
In the case of side-by-side installations, a separate outlet must be used for each appliance.

Power Cord - Plug and length

Yes - NEMA 5-15 plug, 5 ft (1.52 m)

Shipping

Shipping Weight 550 lbs (250 kg)

Shipping Dimensions 39¹/₂" W x 89¹³/₁₆" H x 29¹/₄" D

Support

Call Miele 800.843.7231


Miele Website www.mieleusa.com

20/20 Link 2020technologies.com

Built-In 36" Bottom Mount KF 1913 SF / KF 1903 SF



FOR PROUD INSTALLATION

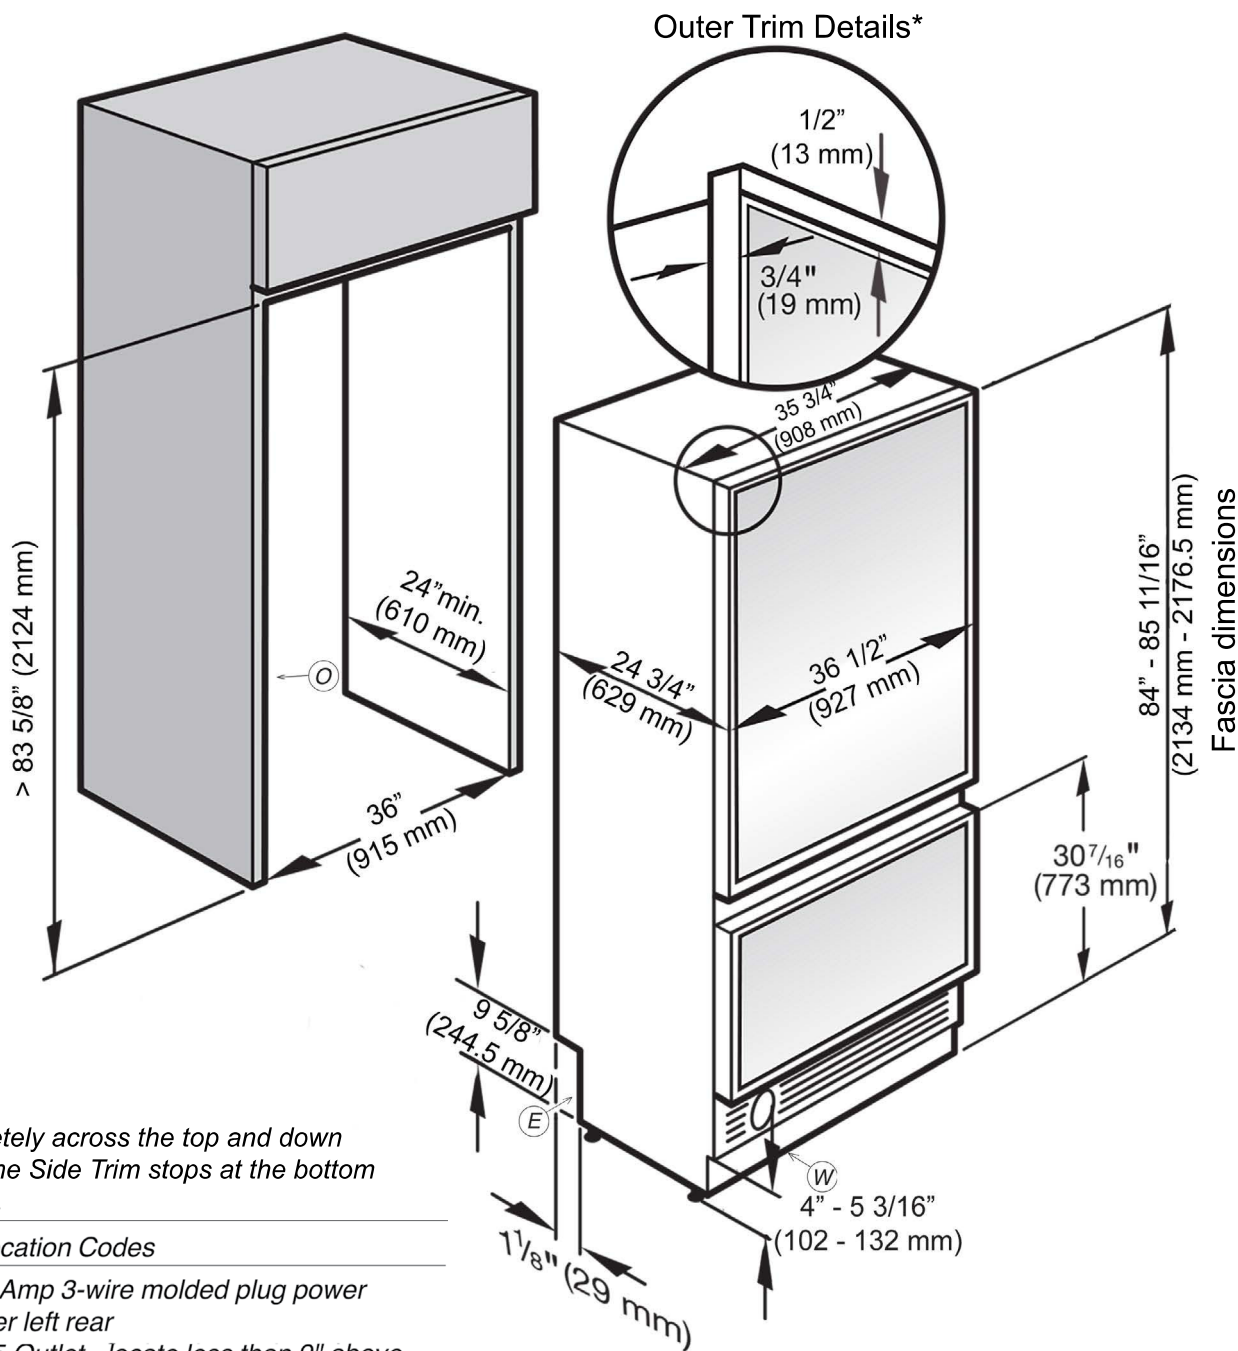

* Outer Trim runs completely across the top and down the sides of the unit. The Side Trim stops at the bottom edge of the door panel.

Location Codes

- E - 5 foot - 120 Volt - 15 Amp 3-wire molded plug power supply connects lower left rear
- O - Standard NEMA 5-15 Outlet - locate less than 9" above finished floor
- W - 1/4" flexible water line



Notes

- All Installations must be done in accordance with local codes
- Sides of adjoining cabinets should be filled (flush to frame) to insure proper fit and finish
- For Proud Installation - please adjust accordingly

Built-In 36" Bottom Mount KF 1913 SF / KF 1903 SF




POWER SUPPLY AND WATER CONNECTION BACK VIEW

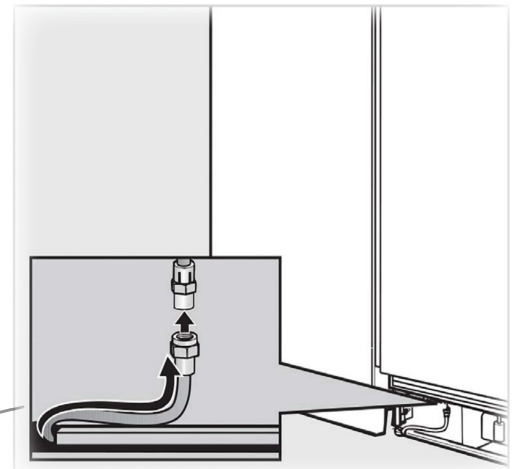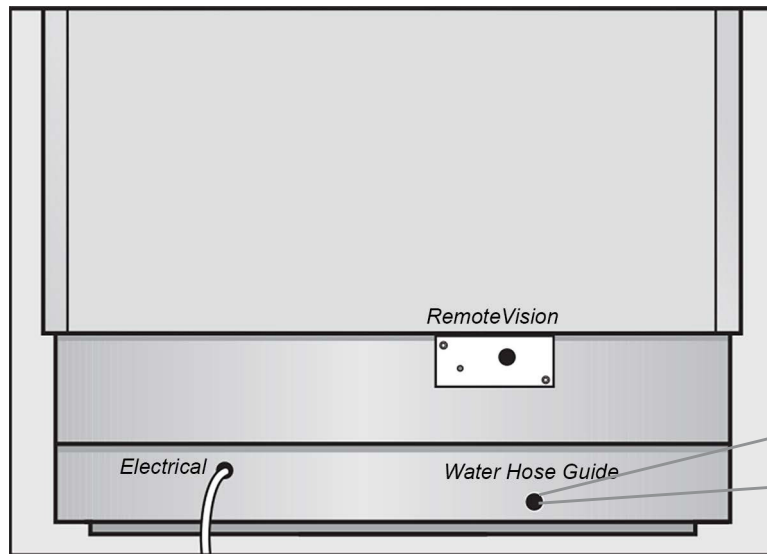

Water connection is located in front of unit.
1/4" compression fitting is needed.


Electrical - 5 foot (1.52 m) - 120 Volt - 15 Amp - NEMA 5-15 molded plug
Water line - 1/4" flexible water line - not included

DOOR PANEL DIMENSIONS WITHOUT OUTER TRIM

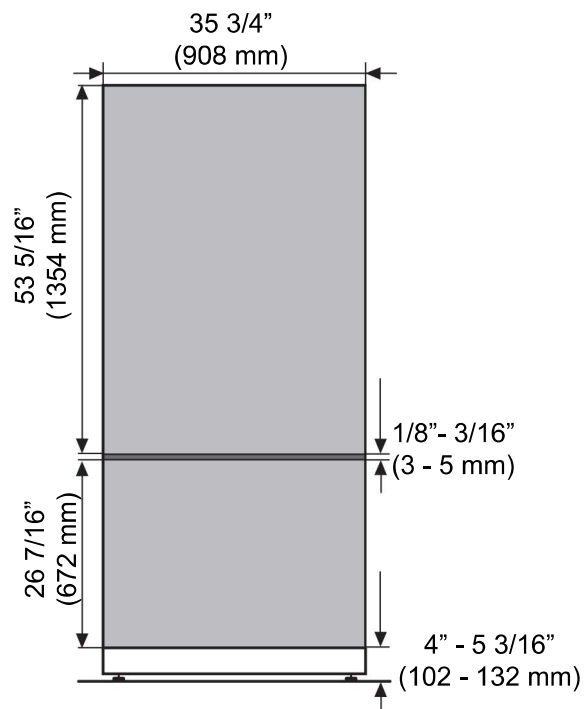


HINGING DETAILS

90° Door

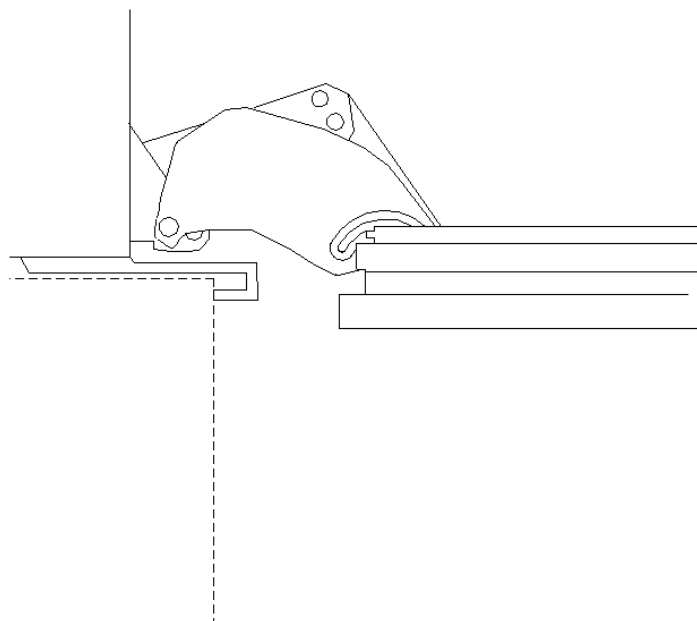


115° Door

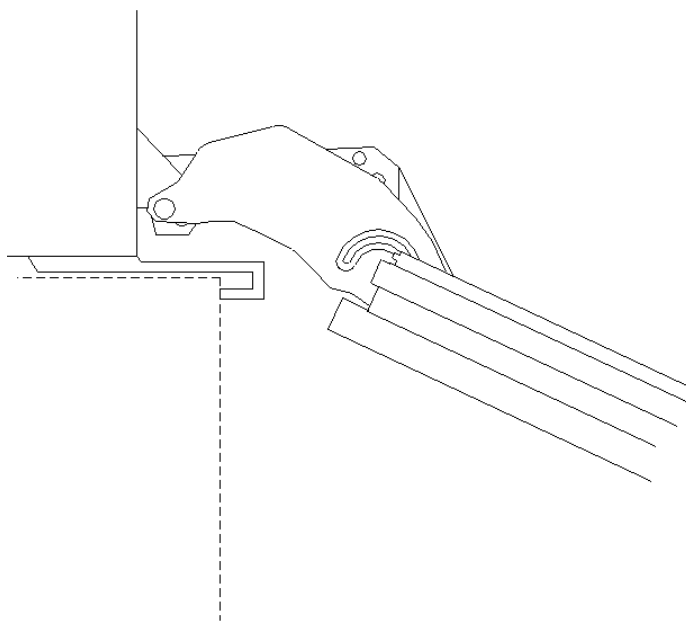

Door Swing

3 9/16"
(90 mm)

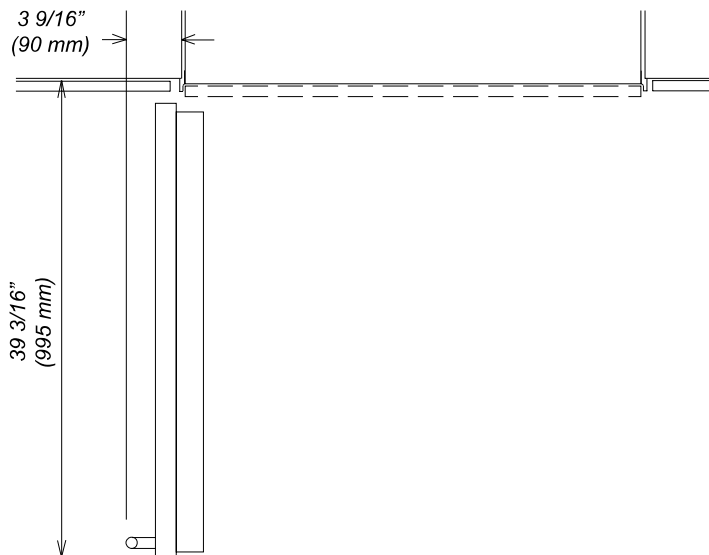

Door Swing

18"
(457 mm)

