

IRONSTRIKE WOOD INSERTS
STRIKER C160
 COUNTRY STOVES COLLECTION

COUNTRY STOVES
 A LIFETIME OF WARMTH



STRIKER C160

OVERVIEW

- ◆ Integrated air wash system helps keep the glass clean during use for an improved view of the fire.

- ◆ Ceramic glass for extra strength and optimum heat transfer.

- ◆ Unique, integral air wash system keeps the glass clean and clear for a wide-open view of the fire.

- ◆ Precision-cut, heavy-gauge steel provides dependable, long-lasting operation.

- ◆ High-density firebrick retains heat longer, resulting in increased efficiency.

- ◆ One-touch control ensures easy operation and comfort.

- ◆ Choice of surround panels to cover the surrounding fireplace opening (1-required).

- ◆ Optional decorative door faceplates in Brushed Nickel or Nickel allow customization to your style.

- ◆ Optional nickel-plated surround kit screws for a finished nickel trimmed appearance

- ◆ Optional 160-CFM variable-speed blower quickly moves heat from the insert into your room.

- ◆ EPA-certified and Washington State-approved for clean and efficient operation.

- ◆ Limited Lifetime Warranty

OPTIONS

FACE STYLE & FINISH

Traditional door Arch door




- Brushed Nickel
- Nickel-Plated
- Standard Black

SURROUND & TRIM

The surround is required and is used to cover the surrounding fireplace opening for a finished appearance.





Black surround trim screws are standard. Optional nickel-plated screws are available.

Black Nickel

BLOWER

All Country Stoves Collection fireplace inserts may be fitted with an optional variable-speed blower (160-CFM blower).



- Standard Black
- Nickel-Plated

* Square-foot heating capacities and burn times are approximations only. Actual performance may vary depending upon home design and insulation, ceiling heights, climate, condition and type of wood used, appliance location, burn rate, accessories chosen, chimney installation and how the appliance is operated.

SPECIFICATIONS

PRODUCT DIMENSIONS

	STRIKER C160
Front Width	23-1/8"
Rear Width (Rear Taper Width)	23-1/2" (21-1/2")*
A = Front Height	18-1/2"
B = Rear Height	19-1/4"
C = Depth into FP	12-1/2"
Flue Diameter **	6"
D = Depth onto Hearth	6-1/2"
Approximate Weight	320 lbs.

** Consult your dealer or professional installer for recommended chimney sizes for your application. C260 and C310 require 6" reducer for use with 6" chimney.

* Leveling nuts extend outside this dimension.

SURROUND SIZING

	STRIKER C160
Surround Size	26-1/2"H x 40"W
	26-1/2"H x 48"W
	30-1/2"H x 40"W
	30-1/2"H x 48"W
Able to be Trimmed	N/A

CLEARANCES




		STRIKER C160
E = Insert Top to Combustible Mantel	US	24"
	Canada	26"
F = Insert Top to Top Facing	US	15"
	Canada	18"
G = Insert Side to Side Wall		20"
H = Insert Side to Side Facing		12"
I = Hearth in Front of Insert †		18"
J = Minimum Mantel Height from Bottom of Insert		43"
K = Hearth to Side of Insert		4-1/2"(US) / 8"(CN)

† In some cases the hearth depth in front of inset may be reduced by 2" for every 2" the hearth is raised. Check the owners manual for details.

FIREPLACE SIZING

		STRIKER C160	
		MASONRY FIREPLACE	ZC FIREPLACE
L	Minimum Depth	12-3/4"	12-3/4"
M	Minimum Height	19-1/2"	21"
N	Minimum Width	25-1/2"	36"
P	Minimum Rear Width	23-1/2"	23-1/2"
Q	Maximum Lintel Depth	4-3/4"	4-3/4"

DIAGRAMS

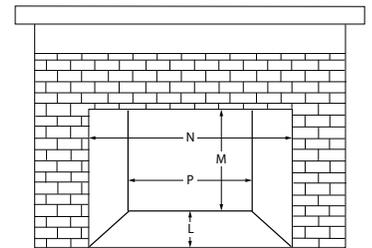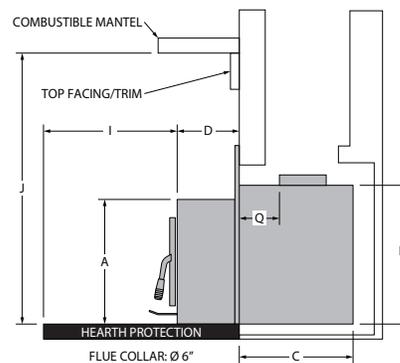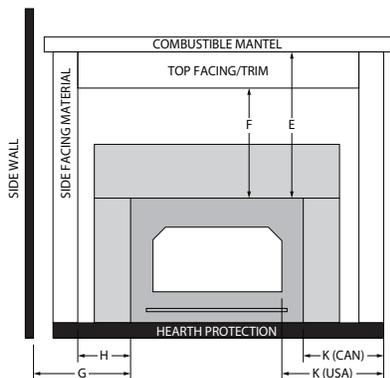

Visit us online
IronStrike.us.com

