

# ADA Bed Frame Assembly

USE WITH MODEL ADATKTG6

**NEED HELP?**

1-800-444-8444

warranty@risehome.com

## INCLUDED PARTS

### FOR ALL SIZES

Side Rail Assembly with Cross Arm  
2 pcs

Center Rail  
(not used for Twin)  
1 pcs

End Caps  
4 pcs

Keyhole Plug Locks  
(not used for Twin)  
4 pcs

Nuts  
6 pcs


Bolts  
6 pcs

Hex Nuts  
4 pcs

Threaded Glides  
6 pcs

### FOR KING & CAL-KING SIZES ONLY

King Extenders  
2 pcs

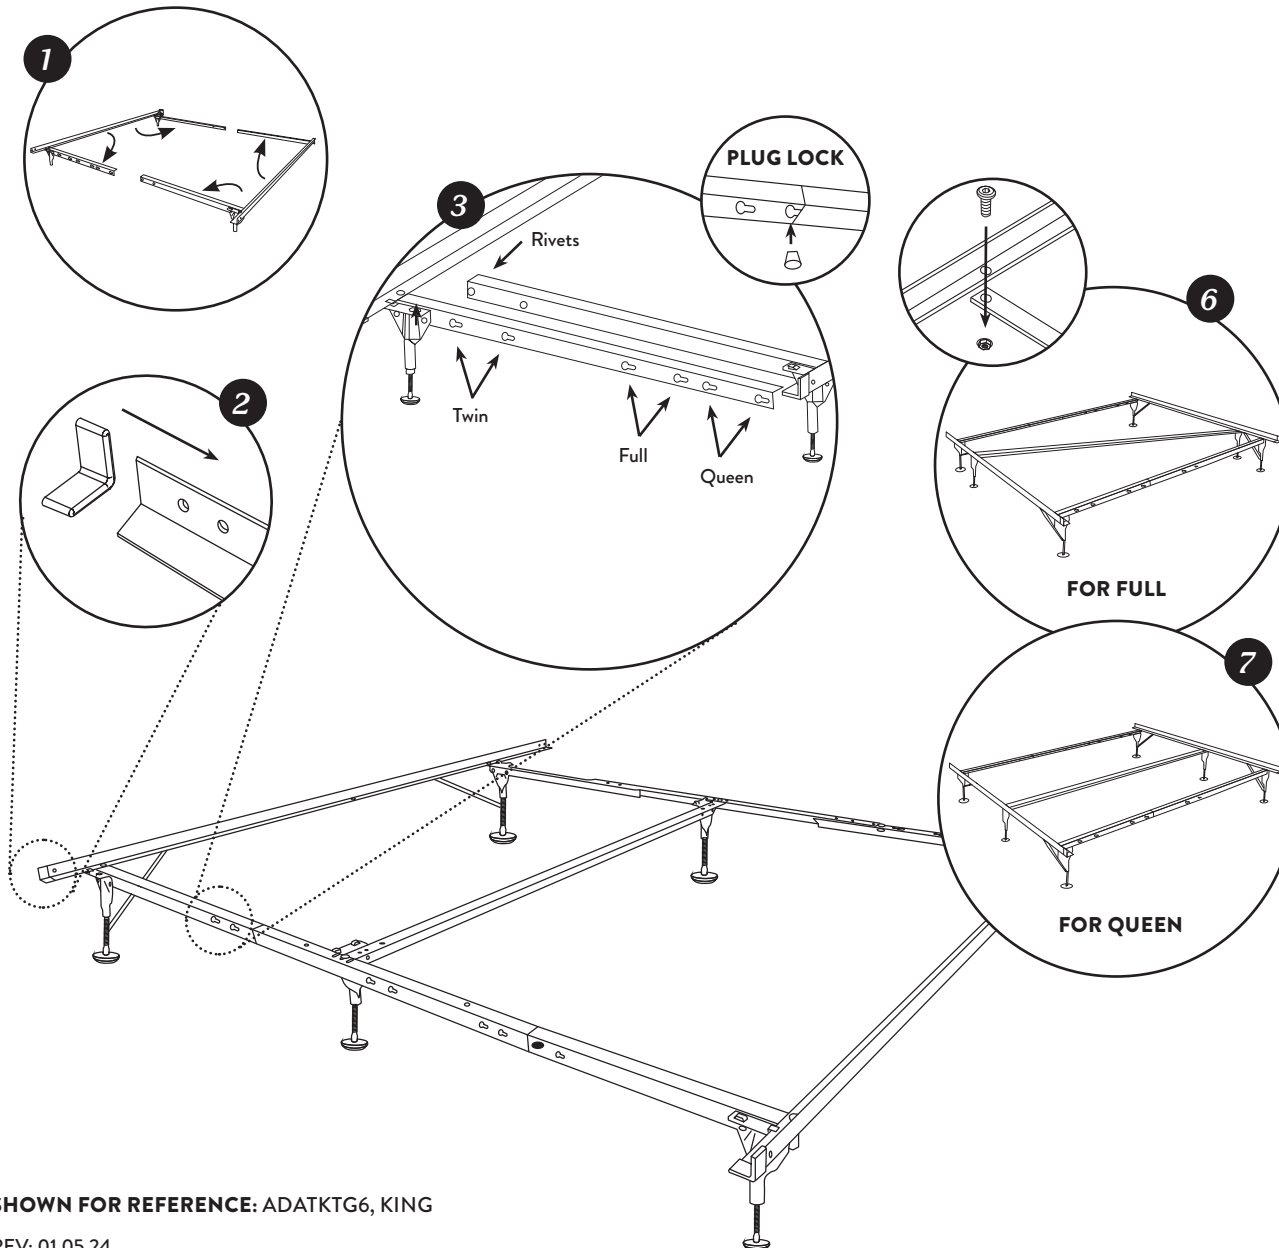

1. Swing out cross arms from the side rails to 90° angles.
2. Place end caps on all 4 frame corners.
3. Locate the key hole slots that correspond to the bedding size you need.

### FOR TWIN:

4. Insert rivets into key hole slots, then slide to lock in place. Continue to Step #13.

### FOR FULL:

5. Insert rivets into key hole slots, then slide to lock in place. Insert plug locks at end of overlap to secure.

6. Align the center rail's holes with the holes to the right of the middle of the side rail. Center rail should be diagonal. Secure with screws and nuts. Continue to Step #13.

### FOR QUEEN:

7. Insert rivets into key hole slots, then slide to lock in place.
8. Align the center rail's holes with the middle of the side rails. Secure with screws and nuts. Continue to Step #13.

SHOWN FOR REFERENCE: ADATKTG6, KING

REV: 01.05.24

# ADA Bed Frame Assembly

USE WITH MODEL ADATKTG6

**NEED HELP?**

1-800-444-8444

warranty@risehome.com

## INCLUDED PARTS

### FOR ALL SIZES

Side Rail Assembly with Cross Arm  
2 pcs

Center Rail  
(not used for Twin)  
1 pcs

End Caps  
4 pcs

Keyhole Plug Locks  
(not used for Twin)  
4 pcs

Nuts  
6 pcs


Bolts  
6 pcs

Hex Nuts  
4 pcs

Threaded Glides  
6 pcs

### FOR KING & CAL-KING SIZES ONLY

King Extenders  
2 pcs

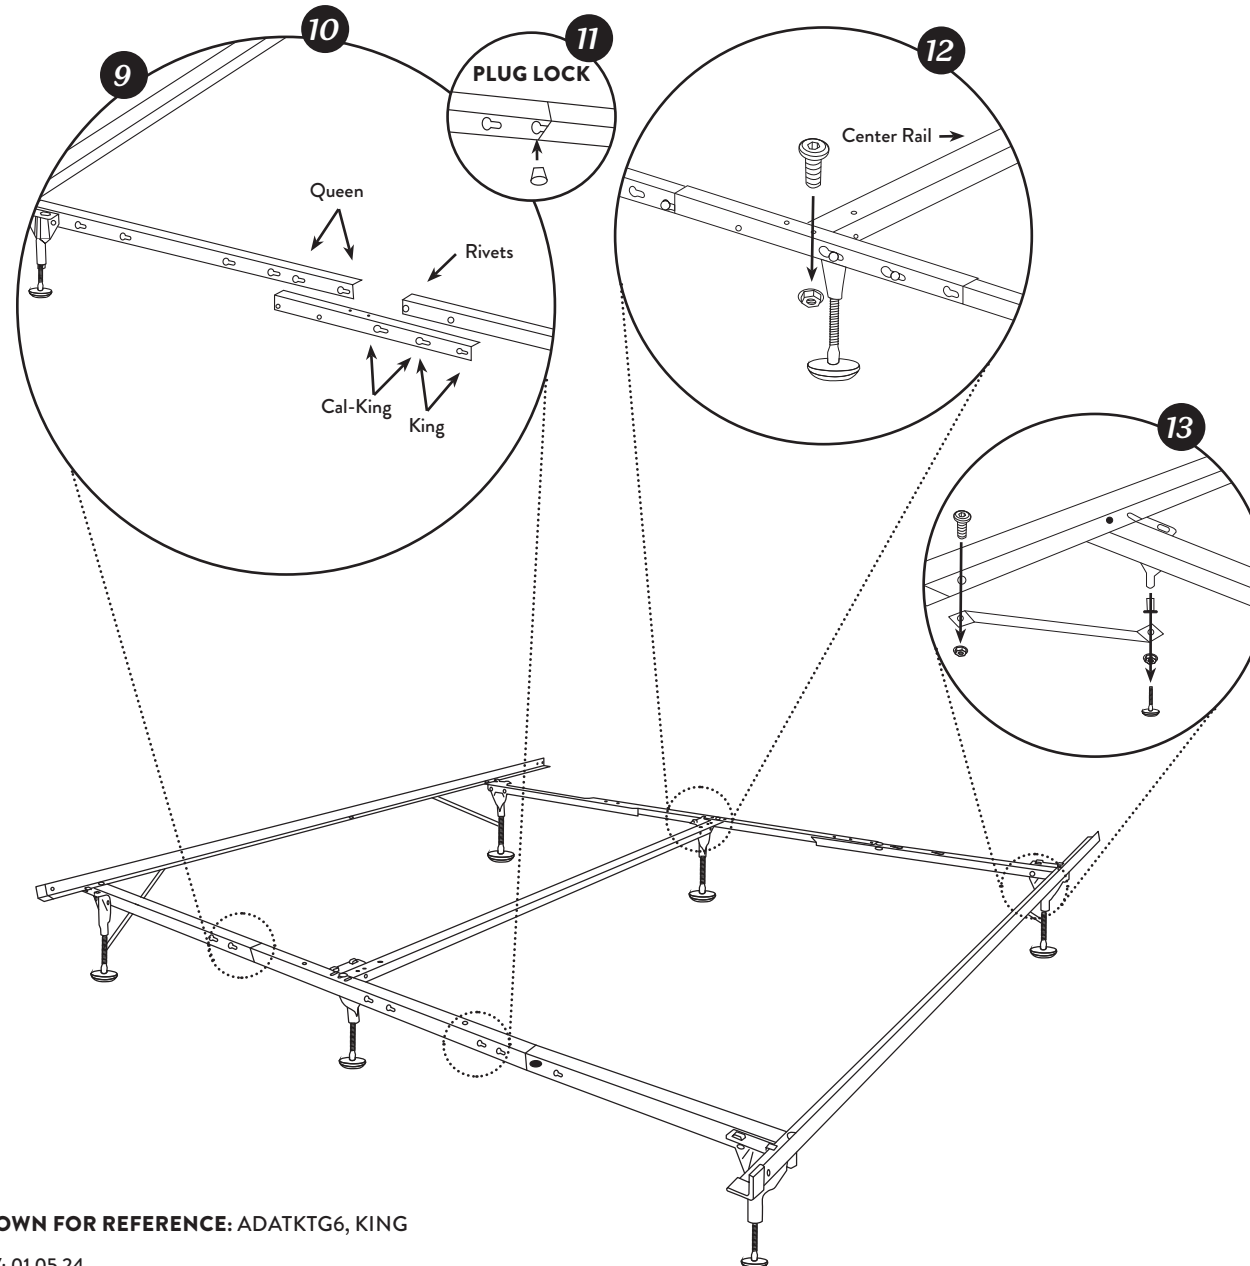

### FOR KING AND CAL-KING:

9. Insert rivets on the king extender into the queen keyhole setting.
10. Locate keyhole slots on the king extender for king or cal-king size, and insert rivets on the cross arm into the selected keyholes and slide to lock.
11. Insert plug locks to secure the overlap. Repeat on the other end.
12. Attach the center rail parallel to the side rails, in the middle of the king extenders. Secure the center rail with screws and nuts. Continue to Step #13.
13. Place hex nut on the threaded glide stem. Screw on 1" from the end. Insert the threaded glide stem through one end of the strap brace and screw into the leg. Hand tighten until reaching the hex nut. Line up the opposite hole of the strap brace with the hole in the angle iron. Insert the bolt from the top and secure with nut. Tighten all nuts and bolts.

SHOWN FOR REFERENCE: ADATKTG6, KING

REV: 01.05.24