



Quick release stainless steel with mesh, dishwasher-safe filters.

Heat Sentry™ detects excessive heat and adjusts speed to high automatically.

10-minute time-delay shut-off feature and reminder light for filter maintenance.

Bright halogen lighting illuminates the cooktop and surrounding area for clear visibility.

Works with optional Universal Make-Up Air Dampers.

Model Numbers:

ISER222SS

IEX222SS



Four blower speed levels are accessible with advanced touch control.



The wrap-around utensil rail is a stylish and functional detail. A polished chrome utensil rail comes with the stainless steel finish.



Hood Sizes

| | |
|--------------|-------------------------------------|
| Width | 48" (51-1/2" with Rail) |
| Depth | 27-9/16" (31-1/8" with Rail) |

Finish

| | |
|---------|---|
| Stocked | Brushed Professional Grade Stainless Steel with Chrome Rail |
|---------|---|

Features

| | |
|-------------------------|---|
| Lighting Type | Halogen, G4-20W |
| Number of Lamps | 4 |
| Lighting Levels | 2 |
| Lighting Lamps Included | Yes |
| Control Type | 4-speed Electronic Pushbutton |
| Control Features | Heat Sentry™, Delay Off, Filter Timer |
| Remote Control | Not Available |
| Filter Type | Stainless Steel with Mesh Grease Filter |
| Non-ducted Capability | No |

Hood Blower Included (ISER222)

| Internal | |
|----------------|------|
| Blower CFM | 1000 |
| Sones Low/High | 10.0 |

Hood Blower Options (IEX222 blowers sold separately)


| External In-line | ILB3 | ILB6 | ILB9 | ILB11 |
|--|------|------|------|-------|
| Max CFM | 280 | 600 | 800 | 1100 |
| Sone levels are typically half of comparable CFM internal blowers. | | | | |
| External Exterior | EB6 | EB9 | EB12 | EB15 |
| Max CFM | 600 | 900 | 1200 | 1500 |
| Sone levels are typically half of comparable CFM internal blowers. | | | | |

Accessories

| | |
|------------------------------|-----------------------------|
| 10' Flue Extension (Ducted) | FEXTISER222—Stainless Steel |
| Non-ducted Recirculating Kit | Not Available |
| Universal MUA Damper | MD6TU, MD8TU, MD10TU |

Installation Requirements

| | |
|------------------------------|---|
| Amps @ 120V: Internal Blower | 6.3 |
| Amps @ 120V: External Blower | 6.9 Max |
| Electrical | Direct Wire |
| Duct Size: Internal Blower | 8" |
| Duct Size: External Blower | 8" at hood (Transition to 10" typical; see pages 64–65) |
| Duct Direction | Vertical |
| Backdraft Damper | Included |

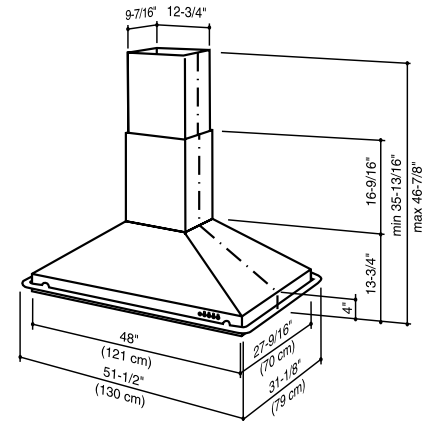

Installation height above the cooking surface:

- 8' ceiling: 24"
- 9' ceiling: 25"–30"
- 10' ceiling: 27"–30"

Telescopic flue for 8'–9' ceiling is standard. Optional flue extensions for 10' ceiling

For more details see the product specifications sheet found at www.BESTRangeHoods.com