

Product Specifications

Style Number	VV031	
Construction	Waterproof Foamed Core	
Edge Profile	Enhanced Painted Bevel	
Nominal Dimensions	7" wide, 72" long	
	US Units	Metric Units
Actual Product Width	7.08"	18 cm
Actual Product Length	72.05"	183 cm
Wear Layer Thickness	20 mil (0.02")	0.5 mm
Overall Product Thickness	0.334"	8.5 mm
Core Thickness	0.276"	7 mm
Attached Underlayment	Attached Cork	
Attached Underlayment Thickness	0.059"	1.5 mm
Finish	UV Acrylic	
Installation Methods	Floating or Direct Glue	
Profile	Angle/Tap	
Country of Origin	Imported	




642 Smoked Rustic P

Packaging

Area per Box	21.27 sq ft	2 sq m
Pieces per Box	6 pcs	
Weight per Box	39.68 lbs	17.99 kg
Boxes per Pallet	55 boxes	

Colors

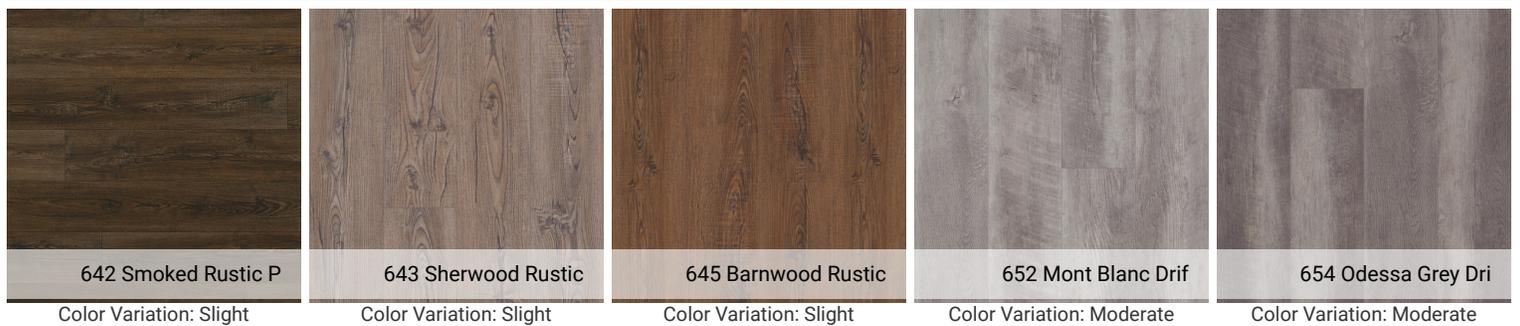

COREtec Plus Plank HD

Performance

Static Load (ASTM F970)	Passes
Residual Indentation (ASTM F1914)	Passes
Resistance to Heat (ASTM F1514)	Passes
Resistance to Light (ASTM F1515)	Passes
Resistance to Chemicals (ASTM F925)	Passes
Smoke Density (ASTM E662)	Passes
Radiant Panel (ASTM E648)	Passes, Class I
Slip Resistance (ASTM D2047)	ADA compliant

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.


Warranties

- USF Lifetime
- [Residential Resilient Limited Warranty - Defects, Wear, Waterproof, Petproof](#)
- USF 10 Year Medium Commercial

Certifications

GreenGuard (Certification, Gold, Private Label) Certified

Coordinating Trim

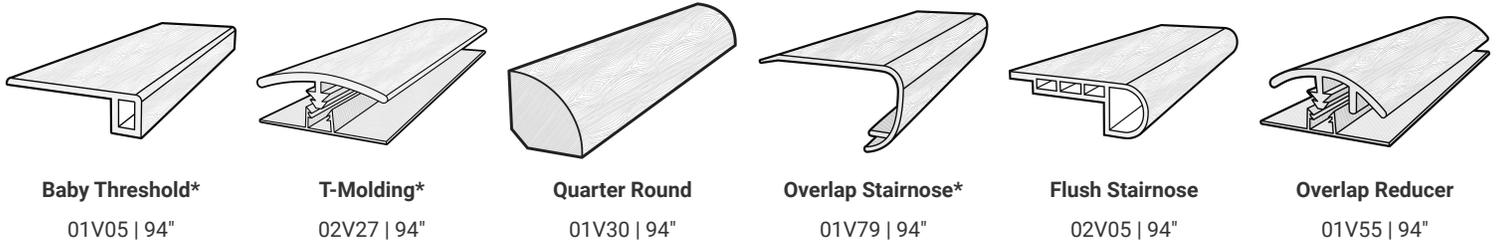

Baby Threshold*

01V05 | 94"

T-Molding*

02V27 | 94"

Quarter Round

01V30 | 94"

Overlap Stairnose*

01V79 | 94"

Flush Stairnose

02V05 | 94"

Overlap Reducer

01V55 | 94"

*Packaged with molding track

Stair Tread



Stair Tread

03Z70 | 48"

