



**15" SIGNATURE SERIES**  
Refrigerator



eco friendly  
R600a Refrigerant



JOB	
AREA	
ITEM NO.	
MODEL NO.	



Solid Door Model



Glass Door Model

MODELS	DESCRIPTION
HP15RS-4-1R/L	Indoor Signature Series Refrigerator Solid Stainless Steel Door
HP15RS-4-2R/L	Indoor Signature Series Refrigerator Solid Panel Ready Door
HP15RS-4-3R/L	Indoor Signature Series Refrigerator Stainless Steel Glass Door
HP15RS-4-4R/L	Indoor Signature Series Refrigerator Panel Ready Glass Door
HP15RO-4-1R/L	Outdoor Signature Series Refrigerator Solid Stainless Steel Door
HP15RO-4-2R/L	Outdoor Signature Series Refrigerator Solid Panel Ready Door
HP15RO-4-3R/L	Outdoor Signature Series Refrigerator Stainless Steel Glass Door
HP15RO-4-4R/L	Outdoor Signature Series Refrigerator Panel Ready Glass Door
HP15RM-4-1R/L	Marine Signature Series Refrigerator Solid Stainless Steel Door
HP15RM-4-2R/L	Marine Signature Series Refrigerator Solid Panel Ready Door
HP15RM-4-3R/L	Marine Signature Series Refrigerator Stainless Steel Glass Door
HP15RM-4-4R/L	Marine Signature Series Refrigerator Panel Ready Glass Door

**KEY PRODUCT FEATURES AND BENEFITS**

- Superior construction provides ideal combination of energy efficient operation & powerful refrigeration performance ideal for food and beverages
- 1000 BTU/hr capacity delivers industry's most energy efficient cool down, indoors or outdoors
- Up to 70% faster cooling speeds than leading competitor
- All stainless steel interior and exterior provide superior durability and easy cleaning
- Full extension shelving provides faster and safer product access with no reaching in the back of the cabinet; shelves fully extend on vibration dampened stainless steel ball bearing glides
- Perlick Anti-Condensation System™ eliminates condensation from forming on the cabinet (Outdoor and Marine models only)
- Marine & Coastal Grade with Perlick Armor™ upgrades stainless steel, fasteners, and refrigeration system to the highest blend of corrosion resistance and food safety

**Quick Features:**

- Industry's best full 6 year warranty for owner ease of mind
- Available with stainless steel or panel ready door to match your design style
- Audible door alarm warns user if door is held open
- Selectable blue or white LED lighting
- R600a Natural Refrigerant offers maximum energy efficiency with zero ozone depletion potential
- Storage for up to 66 cans



**15" SIGNATURE SERIES**  
Refrigerator

MODEL NUMBERS		HP15RS	HP15RO	HP15RM
MODEL DESCRIPTION		15" Indoor Refrigerator	15" Outdoor Refrigerator	15" Marine/Coastal Refrigerator
ATTRIBUTES				
Perlick Anti-Condensation System		NO	YES	YES
Perlick Armor™		NO	NO	YES
OVERALL DIMENSIONS	Width - in. (mm)	14-7/8" (378 mm.)	14-7/8" (378 mm.)	14-7/8" (378 mm.)
	Depth - in. (mm)	24" (610 mm.)	24" (610 mm.)	24" (610 mm.)
	Height - in. (mm)	34-1/4" (870 mm.)	34-1/4" (870 mm.)	34-1/4" (870 mm.)
STANDARD OPENING DIMENSIONS	Width - in. (mm)	15" (381 mm.)	15" (381 mm.)	15" (381 mm.)
	Depth - in. (mm)	24-7/8" (632 mm.)	24-7/8" (632 mm.)	24-7/8" (632 mm.)
	Height - in. (mm)	34-1/2" (876 mm.)	34-1/2" (876 mm.)	34-1/2" (876 mm.)
INTERNAL VOLUME Net. Cu. Ft.		2.8 cu. ft.	2.8 cu. ft.	2.8 cu. ft.
SHIPPING WEIGHT Lbs. (kg.)		150 lbs (68.04 kg)	150 lbs (68.04 kg)	150 lbs (68.04 kg)
ELECTRICAL SPECIFICATIONS	Electrical Supply	115 VAC/60 Hz/1 Ph	115 VAC/60 Hz/1 Ph	115 VAC/60 Hz/1 Ph
	Running Load Amps	1.7 amps	1.7 amps	1.7 amps
	Electrical Connection	Cord connected	Cord connected	Cord connected
	Cord Plug Type	NEMA 3 Prong 5-15P	NEMA 3 Prong 5-15P	NEMA 3 Prong 5-15P
	Cord Length	6'	6'	6'
	Defrost Initiation	Automatic	Automatic	Automatic
	Defrost Type	Off cycle	Off cycle	Off cycle
	Thermostat	Digital	Digital	Digital
	Lighting Type	LED	LED	LED
REFRIGERATION SPECIFICATIONS	Refrigerant	R600a (44g)	R600a (44g)	R600a (44g)
	Expansion Device	Capillary Tube	Capillary Tube	Capillary Tube
	Temperature Settings F°(C°)	33° (0.5°) - 48° (8.8°) Factory Set Point 36° (2.2°)	33° (0.5°) - 48° (8.8°) Factory Set Point 36° (2.2°)	33° (0.5°) - 48° (8.8°) Factory Set Point 36° (2.2°)
	Heat Rejection (at 75°F)	300 BTU/hr	300 BTU/hr	300 BTU/hr
	Pull Down Capacity	1000 BTU/hr	1000 BTU/hr	1000 BTU/hr
	Front Vented	Yes	Yes	Yes
PLUMBING		None Required	None Required	None Required

Installation Notes: To achieve 24" install depth, place electrical connection adjacent to the installation cavity.

**ACCESSORIES**

MODEL NOS.	DESCRIPTION
(L)	Factory Installed Lock
67990-L/R	Stacking Kit for HP15 models
66736-15	Caster Kit for HP15 models

Perlick accessories are available for purchase through an authorized Perlick dealer. For a full list of accessories and to find a dealer near you, visit [perlick.com](http://perlick.com).

**⚠ WARNING: California Prop 65 Notice**

These products may expose you to chemicals including Chromium, which are known to the state of California to cause cancer and birth defects or other reproductive harm. For more information on whether a product in this list contains these chemicals, please refer to the specific product page at [perlick.com](http://perlick.com). Or to find out more about **Prop 65**, go to [P65Warnings.ca.gov](http://P65Warnings.ca.gov).




**15" SIGNATURE SERIES**  
Refrigerator

	CUSTOMER MODEL NUMBER	REGULATORY MODEL NUMBER	Hinge Side	Lock
INDOOR	HP15RS-4-1L	HP15RS4C-00-SLF0R	Left	No
	HP15RS-4-1R	HP15RS4C-00-SRF0R	Right	No
	HP15RS-4-2L	HP15RS4C-00-PL00R	Left	No
	HP15RS-4-2R	HP15RS4C-00-PR00R	Right	No
	HP15RS-4-3L	HP15RS4C-00-TLF0R	Left	No
	HP15RS-4-3R	HP15RS4C-00-TRF0R	Right	No
	HP15RS-4-4L	HP15RS4C-00-RL00R	Left	No
	HP15RS-4-4R	HP15RS4C-00-RR00R	Right	No
	HP15RS-4-1LL	HP15RS4C-00-SLFLR	Left	Yes
	HP15RS-4-1RL	HP15RS4C-00-SRFLR	Right	Yes
	HP15RS-4-2LL	HP15RS4C-00-PL0LR	Left	Yes
	HP15RS-4-2RL	HP15RS4C-00-PR0LR	Right	Yes
	HP15RS-4-3LL	HP15RS4C-00-TLFLR	Left	Yes
	HP15RS-4-3RL	HP15RS4C-00-TRFLR	Right	Yes
	HP15RS-4-4LL	HP15RS4C-00-RL0LR	Left	Yes
	HP15RS-4-4RL	HP15RS4C-00-RR0LR	Right	Yes
OUTDOOR	HP15RO-4-1L	HP15RO4C-00-SLF0R	Left	No
	HP15RO-4-1R	HP15RO4C-00-SRF0R	Right	No
	HP15RO-4-2L	HP15RO4C-00-PL00R	Left	No
	HP15RO-4-2R	HP15RO4C-00-PR00R	Right	No
	HP15RO-4-3L	HP15RO4C-00-TLF0R	Left	No
	HP15RO-4-3R	HP15RO4C-00-TRF0R	Right	No
	HP15RO-4-4L	HP15RO4C-00-RL00R	Left	No
	HP15RO-4-4R	HP15RO4C-00-RR00R	Right	No
	HP15RO-4-1LL	HP15RO4C-00-SLFLR	Left	Yes
	HP15RO-4-1RL	HP15RO4C-00-SRFLR	Right	Yes
	HP15RO-4-2LL	HP15RO4C-00-PL0LR	Left	Yes
	HP15RO-4-2RL	HP15RO4C-00-PR0LR	Right	Yes
	HP15RO-4-3LL	HP15RO4C-00-TLFLR	Left	Yes
	HP15RO-4-3RL	HP15RO4C-00-TRFLR	Right	Yes
	HP15RO-4-4LL	HP15RO4C-00-RL0LR	Left	Yes
	HP15RO-4-4RL	HP15RO4C-00-RR0LR	Right	Yes
MARINE & COASTAL	HP15RM-4-1L	HP15RM4C-00-MLF0R	Left	No
	HP15RM-4-1R	HP15RM4C-00-MRF0R	Right	No
	HP15RM-4-2L	HP15RM4C-00-PL00R	Left	No
	HP15RM-4-2R	HP15RM4C-00-PR00R	Right	No
	HP15RM-4-3L	HP15RM4C-00-NLF0R	Left	No
	HP15RM-4-3R	HP15RM4C-00-NRFOR	Right	No
	HP15RM-4-4L	HP15RM4C-00-RL00R	Left	No
	HP15RM-4-4R	HP15RM4C-00-RR00R	Right	No
	HP15RM-4-1LL	HP15RM4C-00-MLFLR	Left	Yes
	HP15RM-4-1RL	HP15RM4C-00-MRFLR	Right	Yes
	HP15RM-4-2LL	HP15RM4C-00-PL0LR	Left	Yes
	HP15RM-4-2RL	HP15RM4C-00-PR0LR	Right	Yes
	HP15RM-4-3LL	HP15RM4C-00-NLFLR	Left	Yes
	HP15RM-4-3RL	HP15RM4C-00-NRFLR	Right	Yes
	HP15RM-4-4LL	HP15RM4C-00-RL0LR	Left	Yes
	HP15RM-4-4RL	HP15RM4C-00-RR0LR	Right	Yes



**15" SIGNATURE SERIES**  
Refrigerator

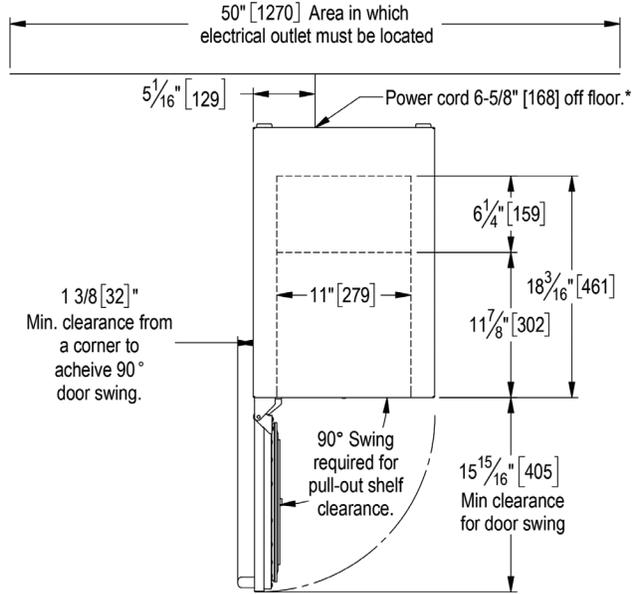

\* - Leg leveler can add 3/4" [19] to these dimensions when fully extended.

