



Blackstone™ 42 Series

WOOD-BURNING FIREPLACES


Framing Dimensions

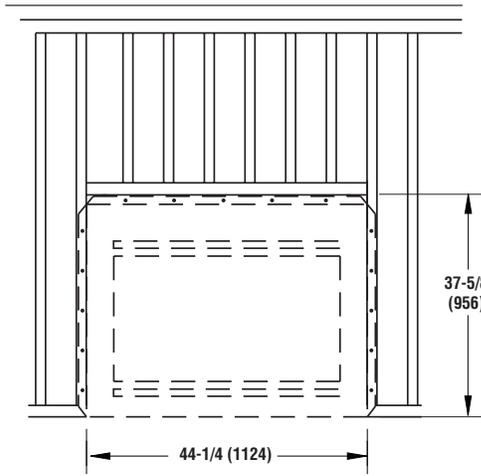

Parallel Framing Dimensions

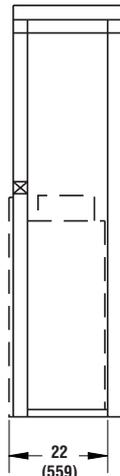


Inches (millimeters)

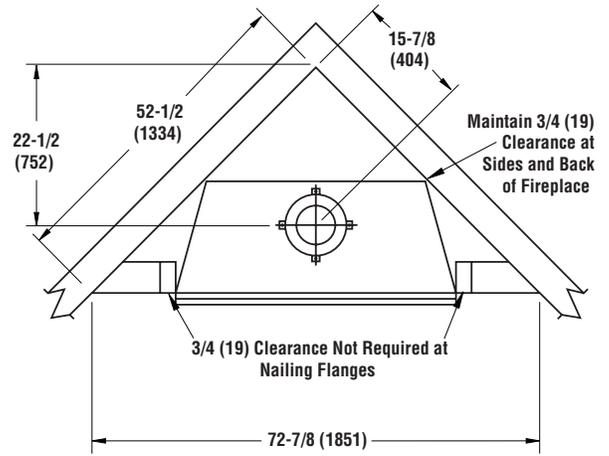


Corner Framing Dimensions


Fireplace Dimensions

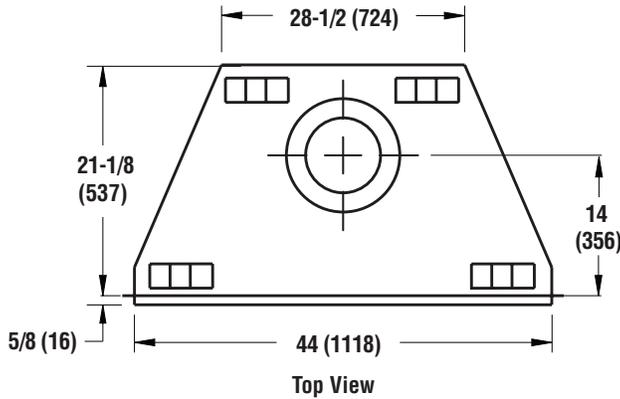

Top View

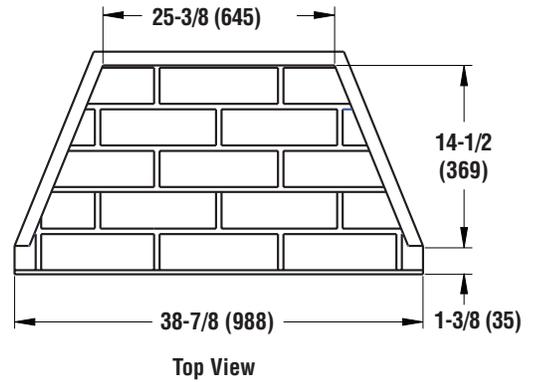


Top View

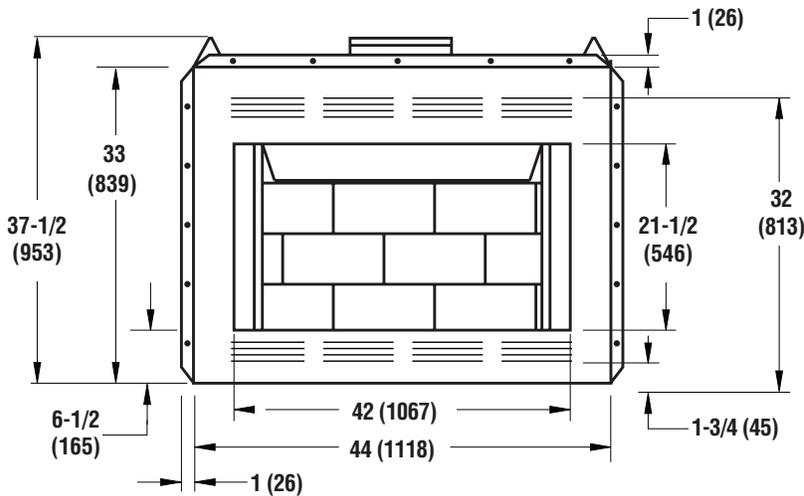


Front View

Inches (millimeters)

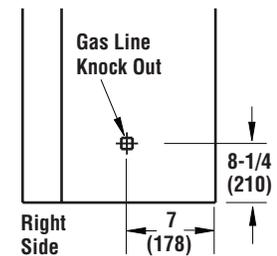

Right Side

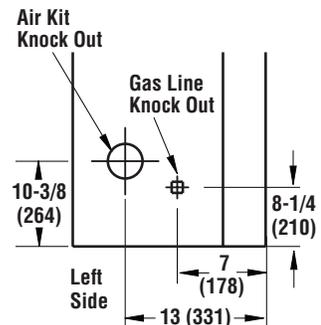

Left Side

NOTE: DIAGRAMS & ILLUSTRATIONS ARE NOT TO SCALE.

Blackstone™ 42 Series

Product Information

Product Reference Information					
Cat. No.	Model	Description	Interior	Shipping Weight	Shipping Volume
F2539	Blackstone42RWS	Radiant	WS	180 lb.	22.0 cu. ft.
F2540	Blackstone42LWS	Louvered	WS	180 lb.	22.0 cu. ft.

Listing Information



Report No. 09-171


This fireplace has been tested and approved by PFS Corporation under UL127/ULC-S610 standard as a Factory Built Appliance and may be used with gas logs approved to ANSI Z21.60, Z21.84 or Z21.11.2 standards.

Clearances to Combustibles	
Description	Min. Clearance
Back and sides of fireplace	3/4 (19)*
Floor	0 (0)**
Perpendicular wall to opening	12 (305)
Top spacers	0 (0)
Chimney outer pipe surface	1 (26)


* Not required at nailing flanges

** See step 2 of Framing in the Installation and Operation Manual

Clearances

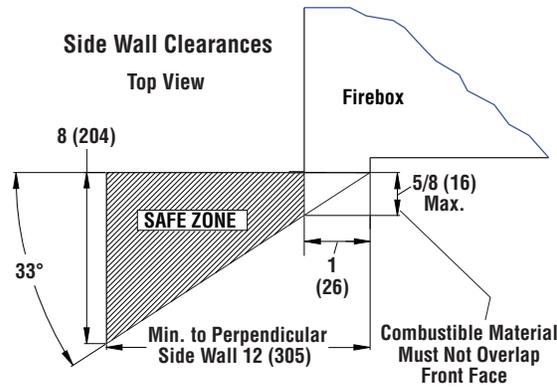

Mantel Clearances

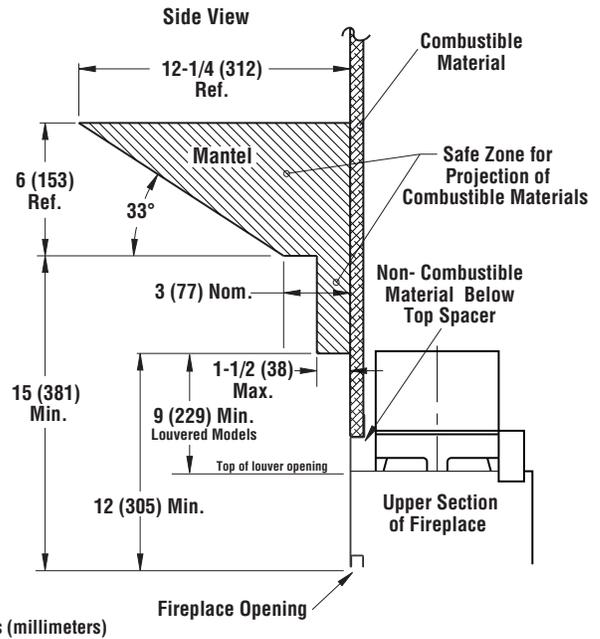

Venting

Uses Standard (8DM) and Hi-Temp (8HT) Wood-Burning Chimney. For Canada Use 8HT Chimney

Venting

