T24UR900RP
UNDER-COUNTER GLASS DOOR REFRIGERATOR
CUSTOM PANEL-READY – RIGHT HINGED



Also Available:

T24UR900LP – Left Hinged Custom Panel-Ready
T24UR920LS – Left Hinged with Professional Series Handle
T24UR920RS – Right Hinged with Professional Series Handle
T24UR910LS – Left Hinged with Masterpiece® Series Handle
T24UR910RS – Right Hinged with Masterpiece® Series Handle

FEATURES & BENEFITS


- Customizable cooling modes – Fridge, Pantry and Bar
- SoftClose® door hinges for ultra-smooth closing
- Fully adjustable tempered glass shelves
- Door Open Alarm
- LED theater Lighting
- Sabbath Mode
- Touch electronic controls for temperature management

GENERAL PROPERTIES	
Custom Panel-Ready	Yes
SoftClose® Door	Yes
Lighting	LED Lighting
Tempered Glass Shelves	4
Door Open Alarm	Yes
Quick Chill	Yes
Touch Electronic Controls	Yes
STAR-K Certified Sabbath Mode	Yes
CAPACITY	
Total Capacity (cu. ft.)	5.1 cu. ft.
TEMPERATURE RANGES	
Refrigerator	33°F (0.5°C) to 58°F (14.5°C)
Pre-Set Cooling Modes	Refrigerator 37°F (3°C) Pantry 53°F (12°C) Bar 34°F (1°C)
Quick Chill	Refrigerator 33°F (0.5°C) for approximately 24 hours
TECHNICAL DETAILS	
Watts (W)	150 W
Current (A)	15 Amp
Volts (V)	115 V
Frequency (Hz)	60 Hz
Power Cord Length (in.)	60"
Plug Type	120V 3-Wire
DIMENSIONS & WEIGHT	
Appliance Dimensions (H x W x D) (in.)	34 1/4"* x 23 7/8" x 24"
Required Cutout Size (H x W x D) (in.)	35" x 24 3/16" x 24 9/16"
Net / Gross Weight (lbs.)	190 / 205 lbs.
EFFICIENCY	
ENERGY STAR® Qualified	Yes
Annual Energy Consumption	274 kWh
WARRANTY	
Limited, Entire Appliance, Parts and Labor on any Part of the Refrigerator that Fails Because of a Manufacturing Defect	
2 Year	
Limited Warranty for Sealed Refrigeration System*; Parts and Labor	
3rd to 6th Year	
Limited Warranty for Sealed Refrigeration System*; Parts Only	
7th to 12th Year	

*Height adjustable + 1/2" (13 mm) with legs fully extended
**Sealed refrigeration system includes compressor, evaporator, condenser, dryer / strainer and connection tubing

T24UR900RP
UNDER-COUNTER GLASS DOOR REFRIGERATOR
CUSTOM PANEL-READY – RIGHT HINGED


GLASS DOOR REFRIGERATOR PRODUCT DIMENSIONS

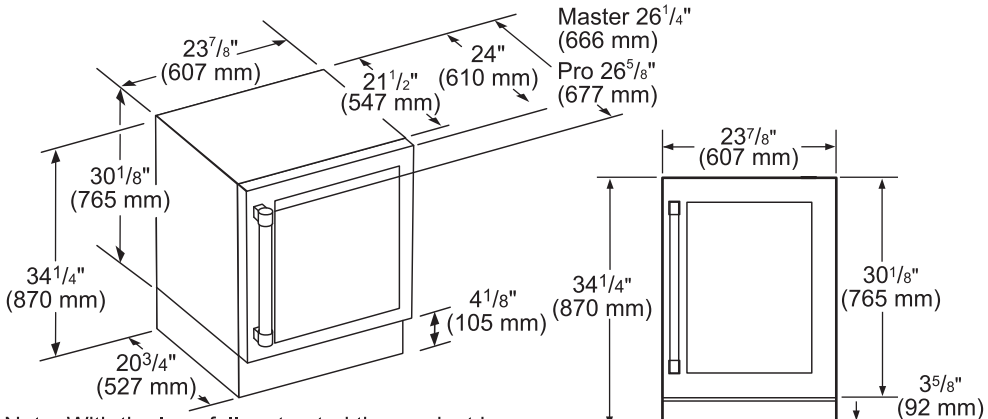

Note: With the legs fully retracted the product has a minimum dimension of 34 1/4" from top to bottom. The legs can be extended up to 1/2".


measurements in inches (mm)

GLASS DOOR REFRIGERATOR CUTOUT DIMENSIONS

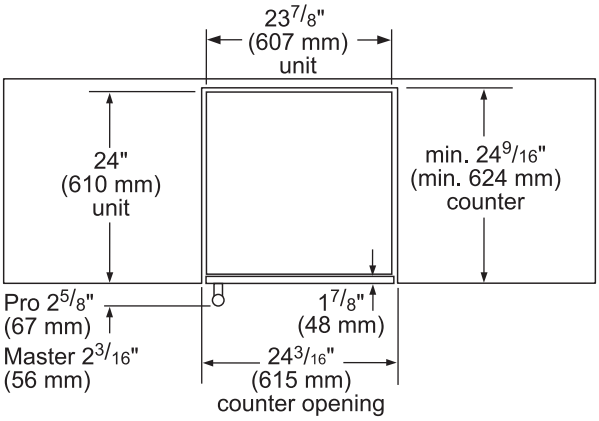


measurements in inches (mm)

Frontal view

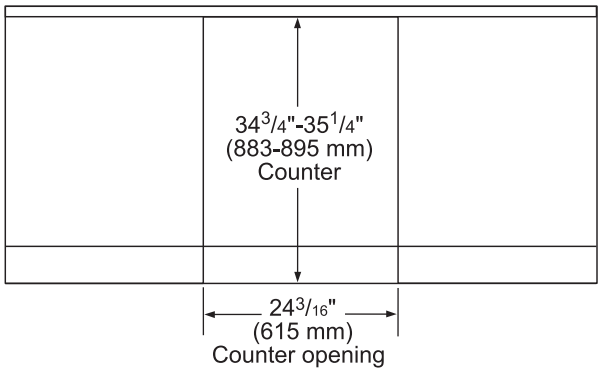

measurements in inches (mm)

GLASS DOOR REFRIGERATOR CUTOUT DIMENSIONS & ELECTRICAL LOCATION

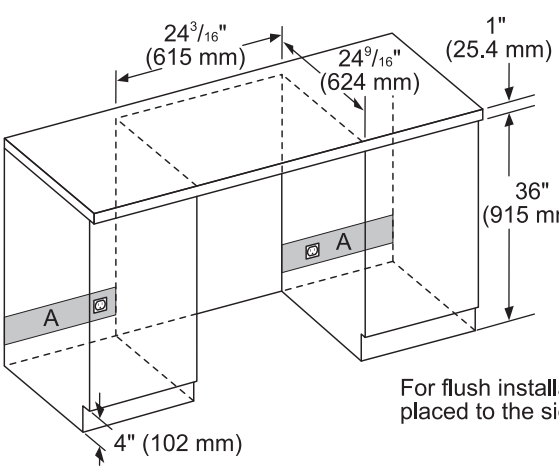

A:
Recommended area for installation connection - a 2 1/2" (63 mm) diameter hole is recommended.
Location of power cord at base of the appliance.




For flush installation, recommend outlet to be placed to the side of the unit and not directly behind.

measurements in inches (mm)


T24UR900RP
UNDER-COUNTER GLASS DOOR REFRIGERATOR
CUSTOM PANEL-READY – RIGHT HINGED

GLASS DOOR REFRIGERATOR CUTOUT & DOOR SWING DIMENSIONS

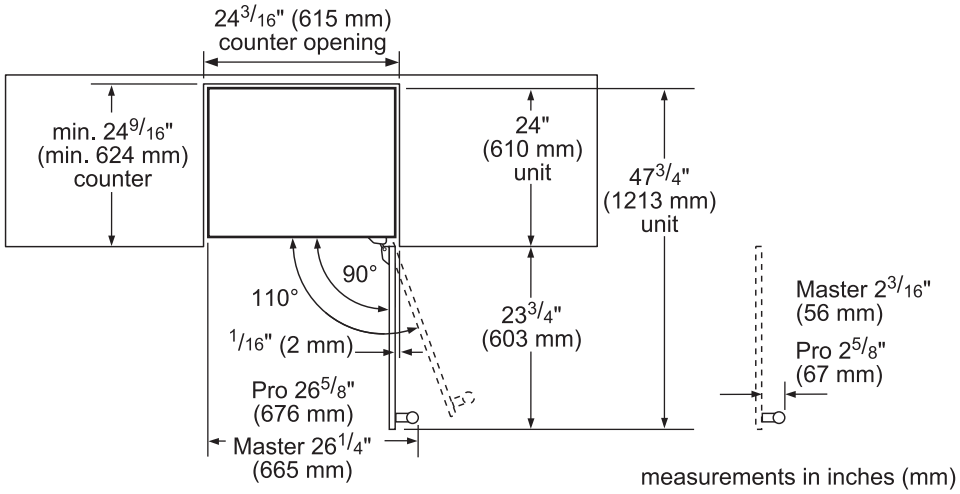

measurements in inches (mm)

GLASS DOOR REFRIGERATOR SIDE-BY-SIDE INSTALLATION

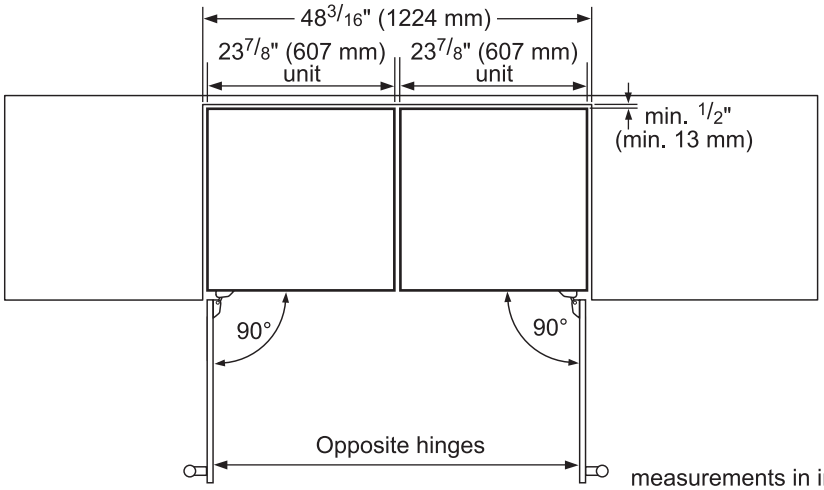

measurements in inches and mm

ACCESSORIES (OPTIONAL)

HANDLES

NOTE: Choose one handle for each glass door model, choose 2 handles for each double drawer model.



PR20HNDL20
20-Inch Professional Series Handle




MS20HNDL20
20-Inch Masterpiece® Series Handle


T24UR900RP
UNDER-COUNTER GLASS DOOR REFRIGERATOR
CUSTOM PANEL-READY – RIGHT HINGED

GLASS DOOR REFRIGERATOR CUSTOM PANEL DIMENSIONS

Overlay Panel - Rear View

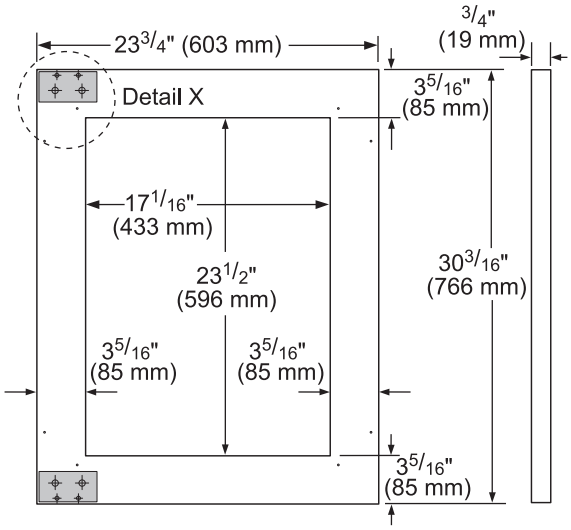

Notes:
1. The thickness of the overlay panel must be 3/4" (19 mm).
2. Overlay panel must not weigh more than 10 lbs (4.54 kg).
3. Overlay panels weighing more than recommended may cause damage to your appliance.
4. It is recommended to have the help of a second person to install the panel.
5. Use the recommended tools in the installation manual to facilitate the installation of the panel. Fail to use the adecuated toolingsor the help of a second person may result in damage to the panel and/or the appliance.
6. The following graphic shows a custom panel for a door with the hinges installed on the right-hand side. If your wine cellar has hinges installed on the left-hand side, rotate the custom panel 180° so the hinge making will be on the left.

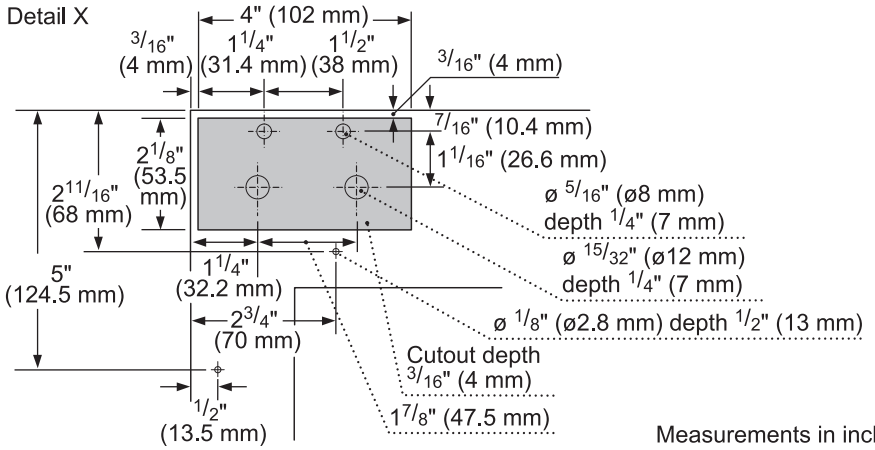

Measurements in inches (mm)

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2018 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.