

PW482210

FEATURES

Breathe cleaner air and enjoy less greasy residue in your kitchen

Make a statement with a stainless professional look or opt for lower-profile "hidden" ventilation

Matches the same heavy-duty stainless-steel construction, hand-finished hemmed edges, and welded seams of all Sub-Zero, Wolf, and Cove products

Select from internal, in-line, or remote blower options (blower required)

Illuminates your cooking area with halogen lighting with two brightness settings

Rely on a heat sentry that automatically turns on the blower or increases its speed when exhaust temperatures exceed 200 degrees Fahrenheit

Minimizes the backward flow of cold air with backdraft transition

ACCESSORIES

3 1/4" x 14" to 10" Round Transition

Backsplash

Backsplash with Warming Racks

Make-Up Air Damper

Inline Blowers


Internal Blowers

Remote Blowers

48" Pro Wall Hood Duct Covers

Accessories available through an authorized dealer.

For local dealer information, visit subzero-wolf.com/locator.

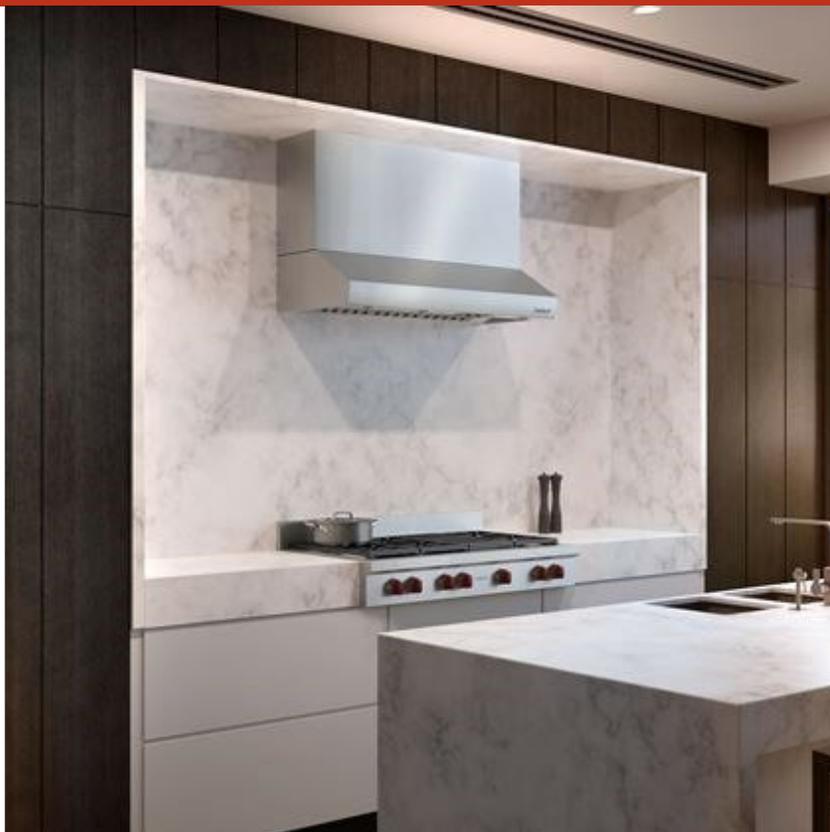


BLOWER OPTIONS

- 500 CFM Internal
- 600 CFM Inline
- 1100 CFM Inline
- 600 CFM Remote
- 900 CFM Remote
- 1200 CFM Remote
- 1500 CFM Remote

PRODUCT SPECIFICATIONS

| | |
|------------------------------|--------------------------|
| Model | PW482210 |
| Dimensions | 48"W x 10"H x 22"D |
| Weight | 55 lbs |
| Electrical Supply | 110/120 VAC, 60 Hz |
| Electrical Service | 15 amp dedicated circuit |
| Discharge Location | Vertical or Horizontal |
| Discharge Dimensions | Rectangle 14" x 3 1/4" |
| Bottom of Hood to Countertop | 30" to 36" |

ELECTRICAL



NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified

DIMENSIONS

