


## **SPECIFICATION SHEET**

# 614804 RANGE HOOD



An enduring stainless steel design that combines the flawless look of Italian style with a lasting impression.

### **FEATURES**


- Italian design
- Wall mount
- Finish: 430 Stainless Steel #4 Brushed
- Width: 48"
- Telescopic flue accommodates 8' to 9' ceilings
- 8" round duct connector/backdraft damper
- Halogen lighting (4 x 20watt, Type JC 12V 20W G4 base, bulbs included)
- Concealed three-speed slide control
- 900 CFM centrifugal blower
- Dishwasher-safe filters feature a quick-release latch and polished stainless steel cover plate
- Heat Sentry<sup>TM</sup> automatically turns blower to high speed when excess cooking heat is detected

### **OPTIONS**

- Replacement grease filters available
- Flue extension for 10' ceiling (Model RFX6104EX) (Ducted only – 33-7/16" long)
- 35-7/16" (90cm) and 30" wide integral blower version (619004 and 613004) available, providing 450 CFM of exhaust
- Exterior blower version for 35-7/16" and 48" widths (61000EX) available, providing 600, 900, 1200, or 1500 CFM exhaust

### **SPECIFICATIONS**

VOLTS	AMPS	CFM	SONES	DUCT
120	6.26	900	9.5	8" round

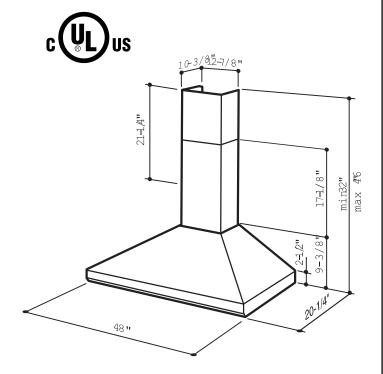



HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in a state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.


Broan-NuTone LLC, 926 West State Street, Hartford, WI 53027 (1-800-637-1453)
NuTone, Inc., 4820 Red Bank Road, Cincinnati, OH 45227 (1-800-543-8687)
Broan-NuTone Canada, Inc., 1140 Tristar Drive, Mississauga, Ontario, L5T 1H9 (1-888-882-7626)

QTY.	REMARKS	Project
		Location
		Architect
		Engineer
		Contractor
		Submitted by Date
	QTY.	QTY. REMARKS

30L 99043360A

# 614804 WIRING 11-1/2" 5-3/4" 120 VOLT 60 HZ GROUNDED WALL OUTLET OFFSET FROM DUCT CENTER LINE (STAY WITHIN 11-1/2" DIMENSION) CENTER LINE OF HOOD & DUCT 27" - 33"

# **614804 MOUNTING**

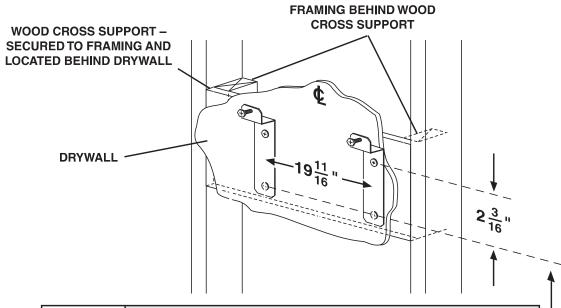

CEILING	HOOD DISTANCE ABOVE 36" HIGH COOKTOP (SEE NOTE AT RIGHT)							
HEIGHT	24"	25"	26"	27"	28"	29"	30"	
	MOUNTING BRACKET LOCATION ABOVE 36" HIGH COOK TOP							
8 FEET	27"	28"	29"	30"	31"			
9 FEET			29"	30"	31"	32"	33"	
10 FEET WITH RFX6104EX			29"	30"	31"	32"	33"	

MOUNTING BRACKET LOCATION (ABOVE 36" HIGH COOKTOP)

**NOTE:** Minimum hood distance above cooktop must not be less than 24"

A maximum of 30" above the cooktop is highly recommended for best capture of cooking impurities.

Distances over 30" above the cooktop are at the installer's and user's discretion - providing that ceiling height and flue length permit.



Broan-NuTone LLC, NuTone, Inc., Broan-NuTone Canada, Inc.,