

The slim curves of Mantra are the perfect complement to today's modern kitchens. Advanced features like powerful ventilation, LED lighting and sleek capacitive touch controls make operation enjoyable.

| SIZE | WHITE | STAINLESS | GREASE FILTERS (replacement) | NON-DUCTED FILTERS |
|--------|-----------|-----------|---------------------------------|-----------------------|
| 30 in. | MTR2303WW | MTR2303SS | HPFAMM30 | HPF30 |

FEATURES

| | |
|-----------------------|------------------------------------|
| Max. Blower CFM ‡ | 350 CFM |
| Control type | 3-speed Soft Touch |
| Delay off | yes |
| Filter Clean Reminder | no |
| ADA Capable | yes |
| Lighting | 2-level LED module (included) |
| Grease Filters | Micro Mesh (Qty. 2) |
| Installation Hardware | EZ1 Bracket |
| ENERGY STAR® | yes |
| Recirculation | Non-ducted filters sold separately |

AC INPUT

| |
|------------------------------------|
| 120 V, 60 Hz - 0.8 AMPS |
| Electrical Connection: Direct Wire |

OPTIONAL ACCESSORIES

| | |
|---------------------|-------------------------|
| 7-in. Round Damper | BP87Q |
| ADA Wiring Kit | HAWRK5 |
| Make-up Air Dampers | MD6TU, MD8TU and MD10TU |
| Power Cord Kit | HCK44 |


MOUNTING HEIGHT

| |
|--|
| Minimum 18 in. from cooktop to bottom of hood for electrical range |
| Minimum 26 in. from cooktop to bottom of hood for gas range |

LIMITED WARRANTY

| |
|---|
| 1-year |
| 3-year (LED modules only) |
| (See installation manual for full warranty text.) |

‡ Max. blower CFM indicates the performance of the hood blower in open air and is not HVI certified..

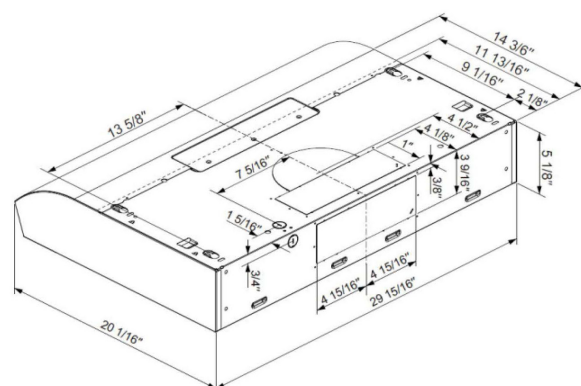


Dimensions shown in inches.



| HVI PERFORMANCE | | | | | | | | | |
|--------------------------|-------------|-------------------|-------|------|------|-----|------|-----------------------|----------------------|
| Duct Orientation | Size | Damper | Sones | | | CFM | | | |
| | | | Low | Med | High | Low | Med | High 0.25 in. w.g. | High 0.1 in. w.g. |
| Vertical - Rectangular | 3¼ x 10 in. | Included | 1.5 | 4.0* | 6.5 | 130 | 190* | 160 | 240 |
| Horizontal - Rectangular | 3¼ x 10 in. | Included | 2.0 | 4.0* | 7.0 | 110 | 180* | 160 | 240 |
| Round - Vertical | 7 in. | Sold Separately** | 2.0 | 4.0* | 6.0 | 150 | 200* | 140 | 250 |

** 7 in. adaptor plate included

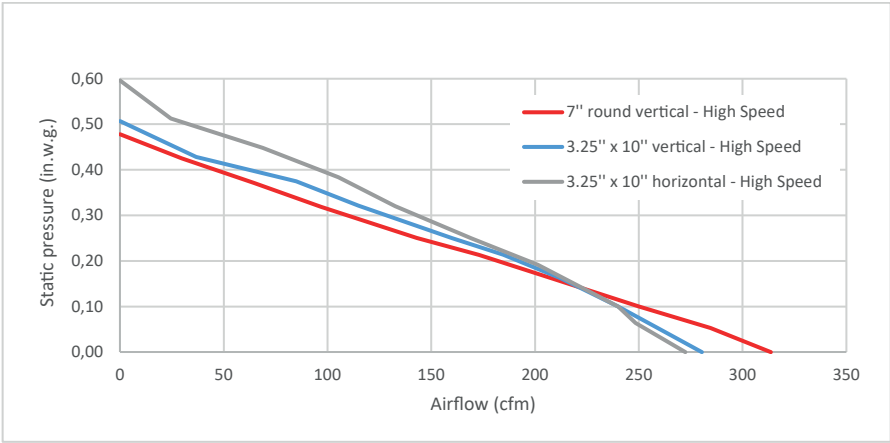

HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 and 0.25 in. static pressure at high speed based on tests conducted in an HVI-approved state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.
* Where noted performance rating is not HVI certified but was established in accordance with HVI Standardized test procedure.