


### PRH6-K30


Halogen lights. This model is not available with heat lamps. This model is available in black, biscuit, gunsmoke, stainless steel, and white. No customizations.

#### Dimensional Information



|               |       |
|---------------|-------|
| Width         | 30.0  |
| Depth         | 19.5  |
| Height        | 6.0   |
| CFM @ 0.0" SP | 250.0 |
| Sones         | 7.4   |
| Amps          | 3.2   |
| # Lights      | 2.0   |

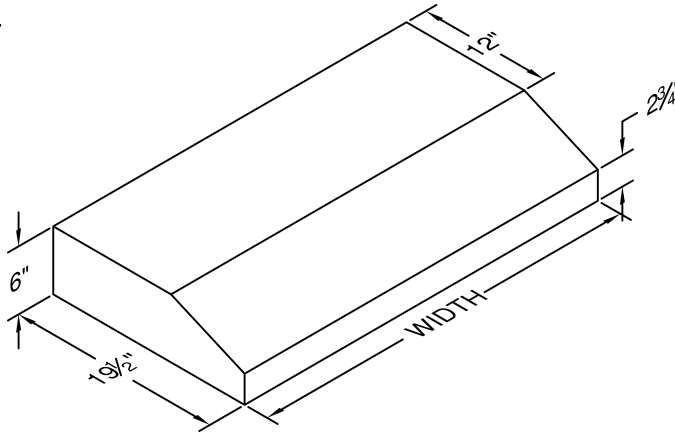


The VP521 transition is available for top vent applications at an additional charge.

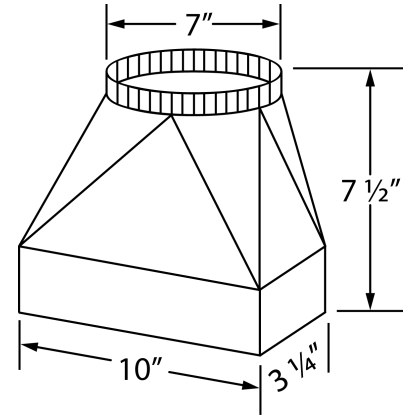

#### Connection Diagram

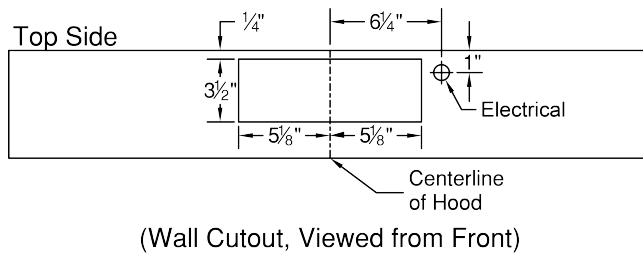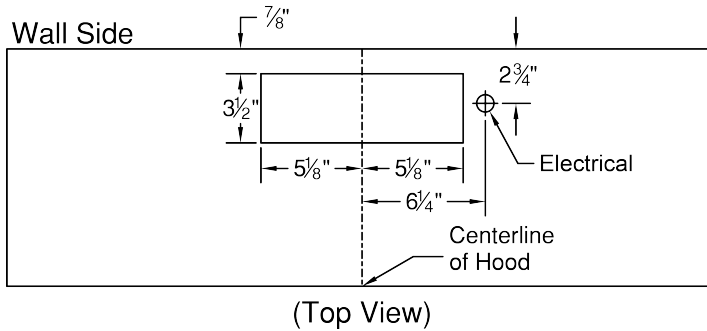

#### Recommended Mounting Height\*

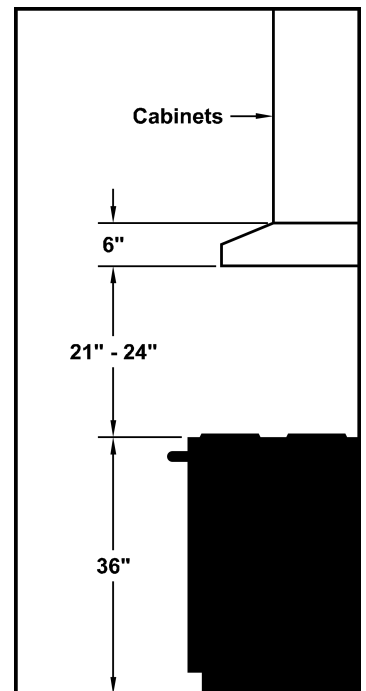

\*Exceeding recommended mounting height may compromise performance.

#### Electrical/Mechanical Specifications For Blower Unit

| Model           | Volts | Amps* | Hz   | RPM    | CFM SP@0.0" | Equivalent CFM | CFM SP@0.1" | CFM SP@0.2" | CFM SP@0.3" | Minimum Round Duct Size | Sones# |
|-----------------|-------|-------|------|--------|-------------|----------------|-------------|-------------|-------------|-------------------------|--------|
| K250 (Top Vent) | 115.0 | 2.2   | 60.0 | 1550.0 | 250.0       | 360.0          | 223.0       | 220.0       | 190.0       | 7" (38 sq. in.)         | 7.4    |

\$ Because the Magic Lung® blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung® blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other filtration systems. When comparing the Magic Lung® with other blower units made by other manufacturers, use the "Equivalent CFM".

# Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.