

FEATURES

- Stainless steel control panel.
- Tubular handles to match Wolf transitional products.
- Standard or flush inset installation.
- Crafted of heavy-duty stainless steel.
- Dual convection upper oven with two fans for even heat distribution.
- Ten cooking modes in upper oven—bake, roast, broil, convection, convection bake, convection roast, convection broil and proof—bake stone and dehydration modes require accessory. Four modes in lower oven.
- Cobalt blue porcelain oven interiors.
- Large viewing, double-pane windows and dual halogen interior lights.
- Three adjustable oven racks per oven; one full-extension easy glide, one full-extension door glide and one standard.
- Hidden bake elements and recessed broil elements.
- Temperature probe and broiler pan.
- Self-clean, delayed start, timed cook and Sabbath features.
- Balanced door hinge system for smooth opening and closing.




MODEL	
Transitional	DO30TE/S/TH

ACCESSORIES

- Bake stone kit (stone, rack and peel).
- Dehydration kit (racks and door stop).
- Set of three standard oven racks.
- Full-extension easy glide oven rack.
- 30" baking sheet.
- Temperature probe and broiler pan.

Accessories available through an authorized Wolf dealer. For local dealer information, visit the find a showroom section of our website, wolfappliance.com.

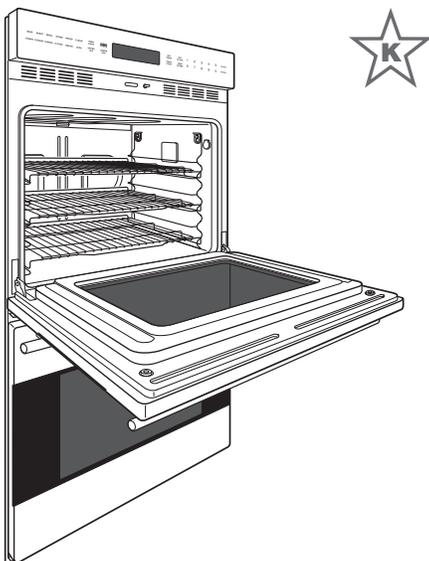

Model DO30TE/S/TH

SPECIFICATIONS

PRODUCT

Dimensions 29⁷/₈"W x 50³/₈"H x 23³/₄"D
 Door Clearance 22"
 Weight 466 lb


OVEN INTERIORS

Interior 25"W x 16¹/₂"H x 19"D
 AHAM Overall Capacity 4.5 cu ft each
 AHAM Usable Capacity 2.8 cu ft each

ELECTRICAL

Supply 240/208 VAC, 60 Hz
 Service 50 amp circuit
 Conduit 5'


DIMENSIONS

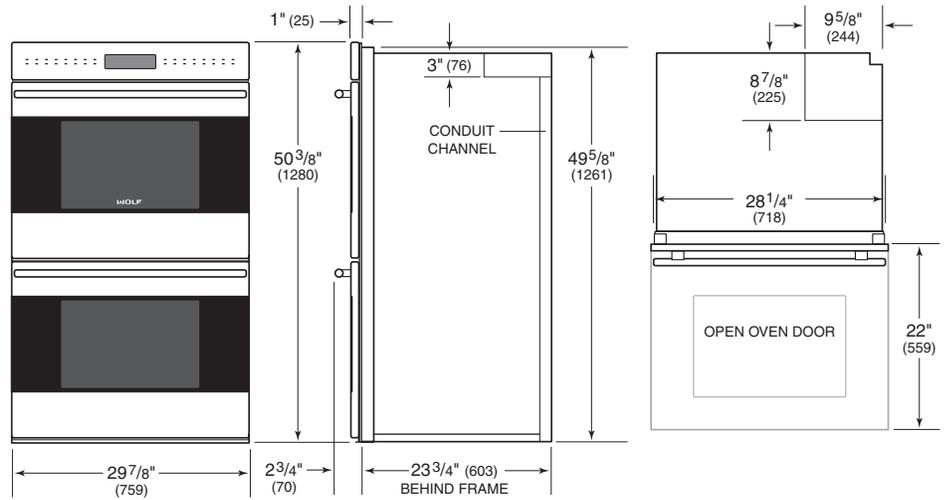

Specifications are subject to change without notice. Visit wolfappliance.com/specs for the most up-to-date information.


Dimensions may vary ±1/8" (3). Dimensions in parentheses are millimeters unless otherwise specified.

STANDARD INSTALLATION

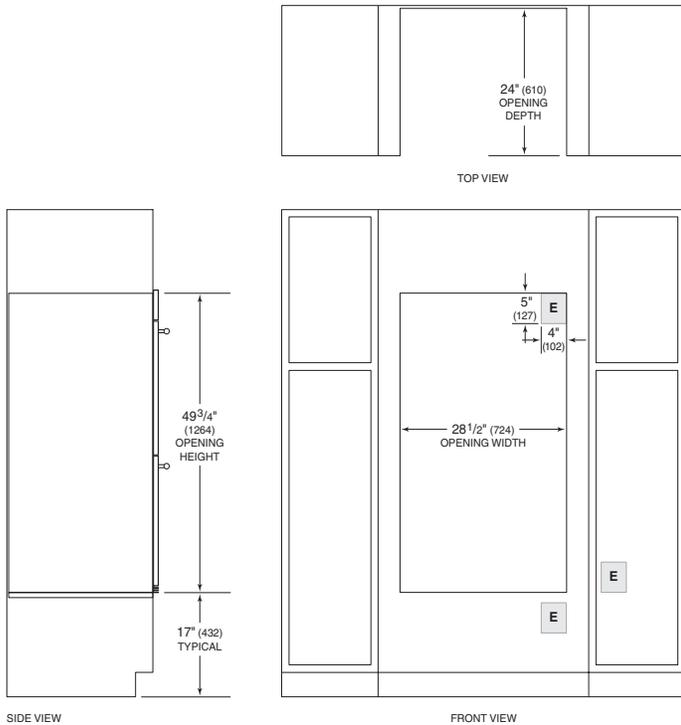

NOTE: Location of electrical supply within opening may require additional cabinet depth.

FLUSH INSET INSTALLATION

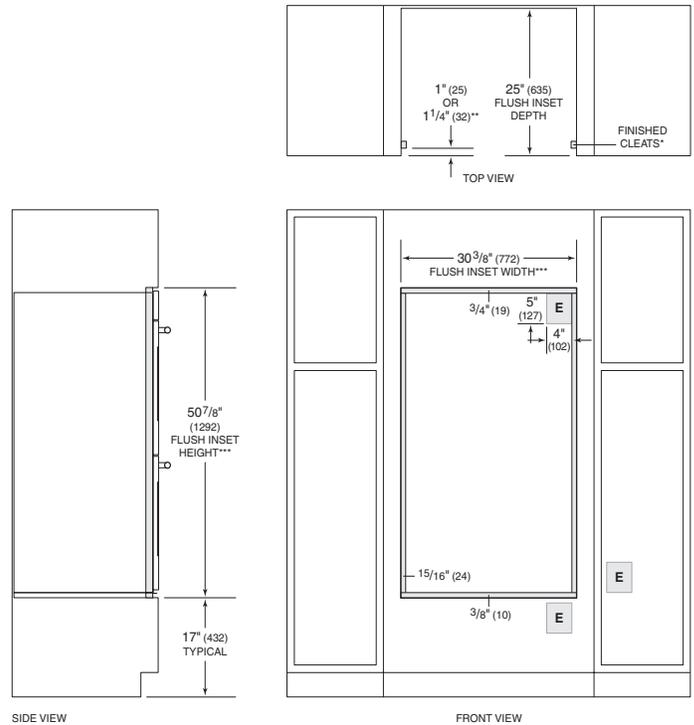

*Will be visible and should be finished to match cabinetry.
 **1" (25) for professional and transitional models and 1 1/4" (32) for contemporary model.
 ***Dimension provides minimum reveals.
 NOTE: Location of electrical supply within opening may require additional cabinet depth.