

# PINAR146SS

Hood Insert



**YALE**  
APPLIANCE



This model provides professional grade performance, while being discreetly mounted inside the cabinetry. It is available with a 1200 CFM blower for extraordinary ventilating power.

Plus the All-In-One design avoids the need purchase a stainless steel liner. Hidden metallic in/out knob controls operate the 4-speed blower and LED lighting. A cleaner kitchen is ensured by angled traditional baffle filters.

*\*Damp Location Approved.*

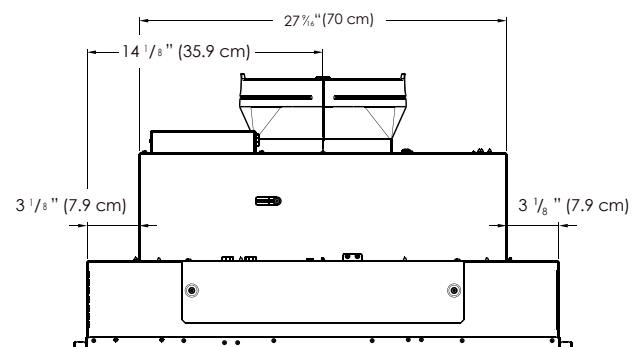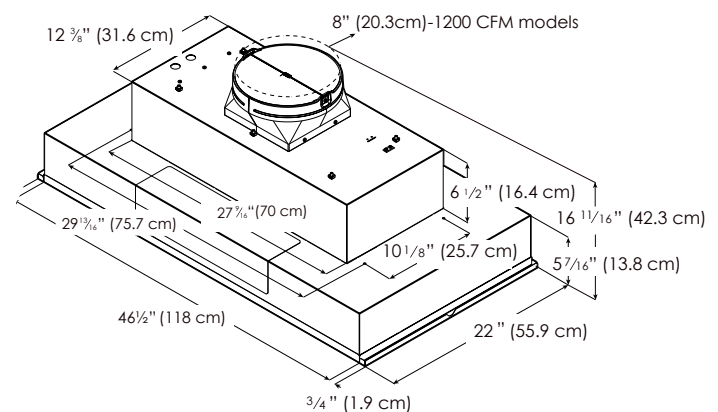

# PINAR146SS

Hood Insert

**YALE**  
APPLIANCE

## SPECIFICATIONS

|   |  |
|---|--|
| Width:  | 46" Unit   |
| Model:  | PINAR146SS   |
| Cut-Out Dimensions:   | 28 15/16"W x 15 5/16"D   |
| Blower Type(internal):**  | 1200 CFM(4-speed)  |
| Noise (sones):**  | 2.5 - 8.5 Sones  |
| Finish:   | Stainless Steel  |
| Controls:   | Fully Retractable Rotating Knobs with White Backlighting   |
| Illumination:<br>(Replaceable Lamps 1 Intensity)  | 4 LED, 6.5 Watts 3000 KELVIN 540 LUMEN/Lamp  |
| Grease Filter:  | (3) Grease Collecting Stainless Steel Baffle   |
| Duct Transition:  | 8" Round with Backdraft Damper (top only)  |
| Installation Type:  | Ducted or Recirculating with Kit   |
| Mounting Height Range:  | Electric ≥ 24", Gas ≥ 30"  |
| Electrical:   | 120V - 60 Hz, 926 Watts  |
| ACCESSORIES:<br>External Blower Shell Kit:<br>Inline Blower Shell Kit:<br>RECIRCULATING KIT:<br>Carbon Filters:<br>Metal Deflector: | ACC0179547 (8" or 10" duct size compatible, for use with 1200 cfm models)<br>ACC0179549(8" or 10" duct size compatible, for use with 1200 cfm models)<br><br>ACC0192765 ( Contains 4 round carbon filters )<br>ACC0192763 (8" round metal deflector for 1200 CFM models) |
| WARRANTY:   | Two (2) years parts & in-home labor  |

## FEATURES



Quiet system - Specialized technology that allows reducing sound levels of your hood, which can effectively decrease noise by more than 35%.



Grease Collecting Baffle Filters - Intended for high airflow cooking. Their "S" shape design and Stainless Steel finish is crafted to capture significant amounts of grease.



Thermal barrier - The system detects extreme temperatures above 158 degrees and automatically increases the blower speed to HIGH.



Fine precision - Constructed with great attention to detail with High-quality stainless steel, result in a seamless and flawless finish.



Superior performance - High performance ventilation with a 1200 CFM Blower.

## AIRFLOW CONTROL

Air Flow Control technology enables the user to reduce the maximum blower CFM of your hood achieving <300 CFMs, to meet local code requirements.

This model includes an Electronic Bypass Kit that needs to be placed at the moment of installing.



\* The product images shown are for illustration purposes only and may not be an exact representation of the product.

\*\* CFM and Noise data indicate the performance of the hood blower tested according to international standards. For AHAM Certified Ratings, established in accordance with California Title 24 Standardized test procedure, please refer to AHAM Certified Product Directory. Electric Ratings are declared according to UL.