Accliv™ | K-103A36-SBNA

Touchless single-hole lavatory faucet, less drain, 0.5 gpm

Features

- Requires battery, plug-in AC power, or Hybrid Energy System (each sold separately)
- Design-forward aesthetic for commercial bathroom spaces
- Below-counter valving reduces the faucet footprint and provides easier service
- 0.5 gpm (1.9 lpm) maximum flow rate with vandal-resistant outlet
- On-demand usage with 30-second max. continual run cycle to prevent vandalism and save water
- Pair with select KOHLER® soap dispensers and single or two-hole escutcheons for an easy retrofit
- Includes spout and control box assemblies, and standard mounting hardware
- Less drain
- Concealed mechanical mixer sold separately
- Complies with the Safe Drinking Water Act (SDWA)



Sustainability

Available Colors/Finishes

Color tiles intended for reference only.

CP Polished Chrome

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
5-30-2026 23:19 - US-CA

THE BOLD LOOK OF KOHLER®

Codes/Standards

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

ADA | CSA B651 | OBC

ASME A112.18.1/CSA B125.1
NSF/ANSI/CAN 372
NSF/ANSI/CAN 61
DOE - Energy Policy Act 1992
California Energy Commission (CEC)
ADA
ICC/ANSI A117.1
CSA B651
OBC

Technical Information

All product dimensions are nominal.

Spout

Spout Reach:	4" (102 mm)

Flow Rate

Faucet Flow Rate:	0.5 gpm (1.9 l/min)

Valves

Included Valves:	Ceramic disc, Thermostatic Mixer

Material

- Premium material construction for durability and reliability

Recommended Products/Accessories

K-24154 Mechanical mixing valve

K-13480 AC single supply, global outlets

K-13481 Multi-outlet power supply, global outlets

K-99799 Undercounter thermostatic mixing valve

Required Products/Accessories

- K-13480-A AC single supply, North American outlets

or

- K-13481-A Multi-outlet power supply, North American outlets

or

- K-28520 High-efficiency battery pack for commercial touchless sensor faucets

or

- K-36264 DC-powered battery pack for commercial touchless faucets

Required Electrical Service

One circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

110/220 V


Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
5-30-2026 23:19 - US-CA

THE BOLD LOOK OF KOHLER®

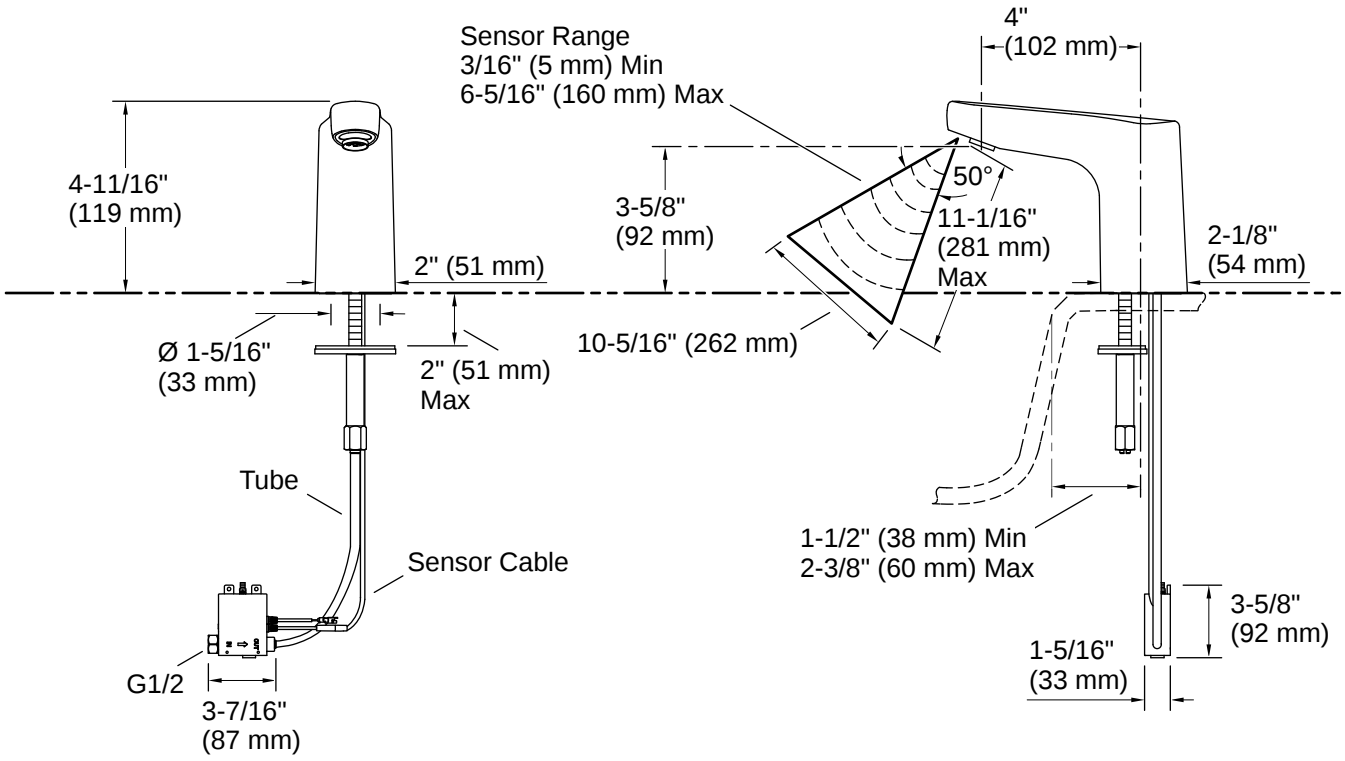

Installation

- Single-hole mounting

Installation Notes

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
5-30-2026 23:19 - US-CA

THE BOLD LOOK OF KOHLER.