

## FIorentina 48" INDUCTION

1M002ZV1015A SOLID DOOR

1M002ZV1016A GLASS DOOR



The Fiorentina 48" Induction is characterized by seven cooking zones. It includes a dedicated bridge element, which allows one to combine both induction zones into one large zone for use with specialty cookware or an induction-capable griddle.

Below the cooking surface, two self-cleaning convection ovens with multiple baking functions allow for ultimate flexibility, performance and capacity. Telescopic chrome oven racks allow for convenient inspection of dishes during cooking and effortless removal when done. The door, made of 4 layers of thermo-reflecting glass, ensure the safety of a cool touch door while the oven is on - even at its highest temperature during the pyrolytic cycle (869°F - 465 °C). Robust stainless oven doors with wide viewing windows get an assist from shock absorbing hinges, facilitating an effortless soft closing oven.

### COOKING SURFACE

- 7 powerful premium European inductors
- 4 Single Induction cooking zones
- 1 Dual Max Power with Ø 11" cooking zone
- 2 Bridge Zone Elements (griddle function)
- Elegant Ceramic glass surface
- Booster function for each cooking zone
- Residual heat and Power-on Indicators
- Pot Detection System
- Child Lock Function
- Automatic Heat-up

### OVENS

- Dual True Convection in main oven and
- True Convection in accessory oven
- Self-cleaning oven with Multifunction baking
- Black Porcelain enamel interior
- Cool to the touch soft closing doors
- Extra-large baking cavity and viewing area
- 3 Halogen lights on the main oven
- 2 Halogen light on the accessory oven
- Total capacity 147,2 lt and 63,4 lt
- Total capacity 5,20 cu. ft. and 2,24 cu. ft.

### OVEN FUNCTIONS

- Bake
- Broil
- Roast
- Convection
- True Convection
- Warm / Proof / Dehydrate
- Electronic cooking programmer
- Fast Pre-Heat
- Self-Clean
- Sabbath Mode

### INCLUDED ACCESSORIES

- 2 chrome racks per oven
- 1 telescopic rack per oven
- 1 enameled broiler pan

FIORENTINA 48" INDUCTION


1M002ZV1015A SOLID DOOR

1M002ZV1016A GLASS DOOR

VER. 1.0 - 2024.05.30

CONTROL PANEL					
Control Type	11 knobs				
Oven Programming	Electronic with 6 Touch Keys				
Display: Clock - Temperature - Function	White LED				
INDUCTION COOKTOP FEATURES					
	Pot Detection System	Residual Heat Indication	Melting Function 113°F / 45°C		
	Simmering Function 158°F / 70°C	Digital Display for Power Level	Booster/Fast Boil Function for Each Zone		
	Failure Codes Indication	Power Levels: 1 to 9	Cooling Fan System		
	Heat up time automatic	Child Lock Function	Knob for power setting		
Type	Induction				
Cooking Zones	5 + 2 Bridge zone elements				
Front Left Power L9   Booster	Inductor 9" (230mm) 2300W   3700W				
Rear Left Power L9   Booster	Inductor 7" (180mm) 1850W   3000W				
Middle dual circuit Power L9   Booster	Inductor 11" (280mm) 3000W   5500W				
Middle single circuit Power L9   Booster	Inductor 7" (180mm) 1850W   3000W				
Front Right Power L9   Booster	Inductor 9" (230mm) 2300W   3700W				
Rear Right Power L9   Booster	Inductor 7" (180mm) 1850W   3000W				
Griddle Front + Rear Left Power L9   Booster	2 x Inductor 7" (180mm) 2 x 1850W   3000W				
OVENS					
Oven Type	Electric Self-clean - Dual Convection (True Euro Conv.)				
Temperature Regulation	Electronic Control (min/max 170/550°F - 75/290°C)				
OVEN FUNCTIONS					
	Pyrolytic Self-Clean	Dehydrate	True Convection		
	Thaw (Defrost)	Convection Broil	Proof (Warm)		
	Convection Roast	Keep warm (Warm Plus)	Pizza (Lower Convection)		
	Oven Lights	Bake	Broil		
	Preset/Last Used Temperature Memory	Preheat Indicator (25%, 50%, 75%, 100%)	Child Door Lock		
	Control Display Lock	Fast Preheat	12/24 Hour Clock Formats		
	Sabbath Mode	Temperature Display °C/°F	Meat Probe		
OVEN CAVITY		18" (ACCESSORY OVEN)		30" (MAIN OVEN)	
Total Capacity	2,24 cu. ft.	63,4 lt	5,20 cu. ft.	147,2 lt	
Cavity Enamel Color	Black		Black		
Rack Positions	6		6		
Oven Lights	2x20W Halogen		3x20W Halogen		
HEATING ELEMENTS (@240V)		18" (ACCESSORY OVEN)		30" (MAIN OVEN)	
Broil Upper Heating Element	2100 W		3500 W		
Upper Auxiliary Element Wattage	700 W		1032 W		
Concealed Bake Lower Heating Element	1750 W		3000 W		
Convection Element	1 x 2500 W		2 x 1300 W		
OVEN ACCESSORIES		18" (ACCESSORY OVEN)		30" (MAIN OVEN)	
Chrome Racks	2		2		
Enameled Broiler Pan (basin + anti splash)	-		1		
Telescopic Chrome Rack	1		1		
DIMENSIONS					
Overall dim - Width	47-15/16"		122 mm		
Overall dim - Height (min - max)	37 - 3/8", 31 - 5/8"		948 mm - 980 mm		
Overall dim - Depth	30 - 1/16"		764 mm		
Gross Weight	450,6 lbs		204,4 kg		
POWER / RATINGS (208/240 V, 60 HZ)					
kW / Amps rating at 120-240V, 60Hz	20.3 kW - 84.6 A				
kW / Amps rating at 120-208V, 60Hz	17.6 kW - 84.6 A				
Power Cable	Nema 14-50P				

MEASUREMENTS - 1M002ZV1015A - SOLID DOOR



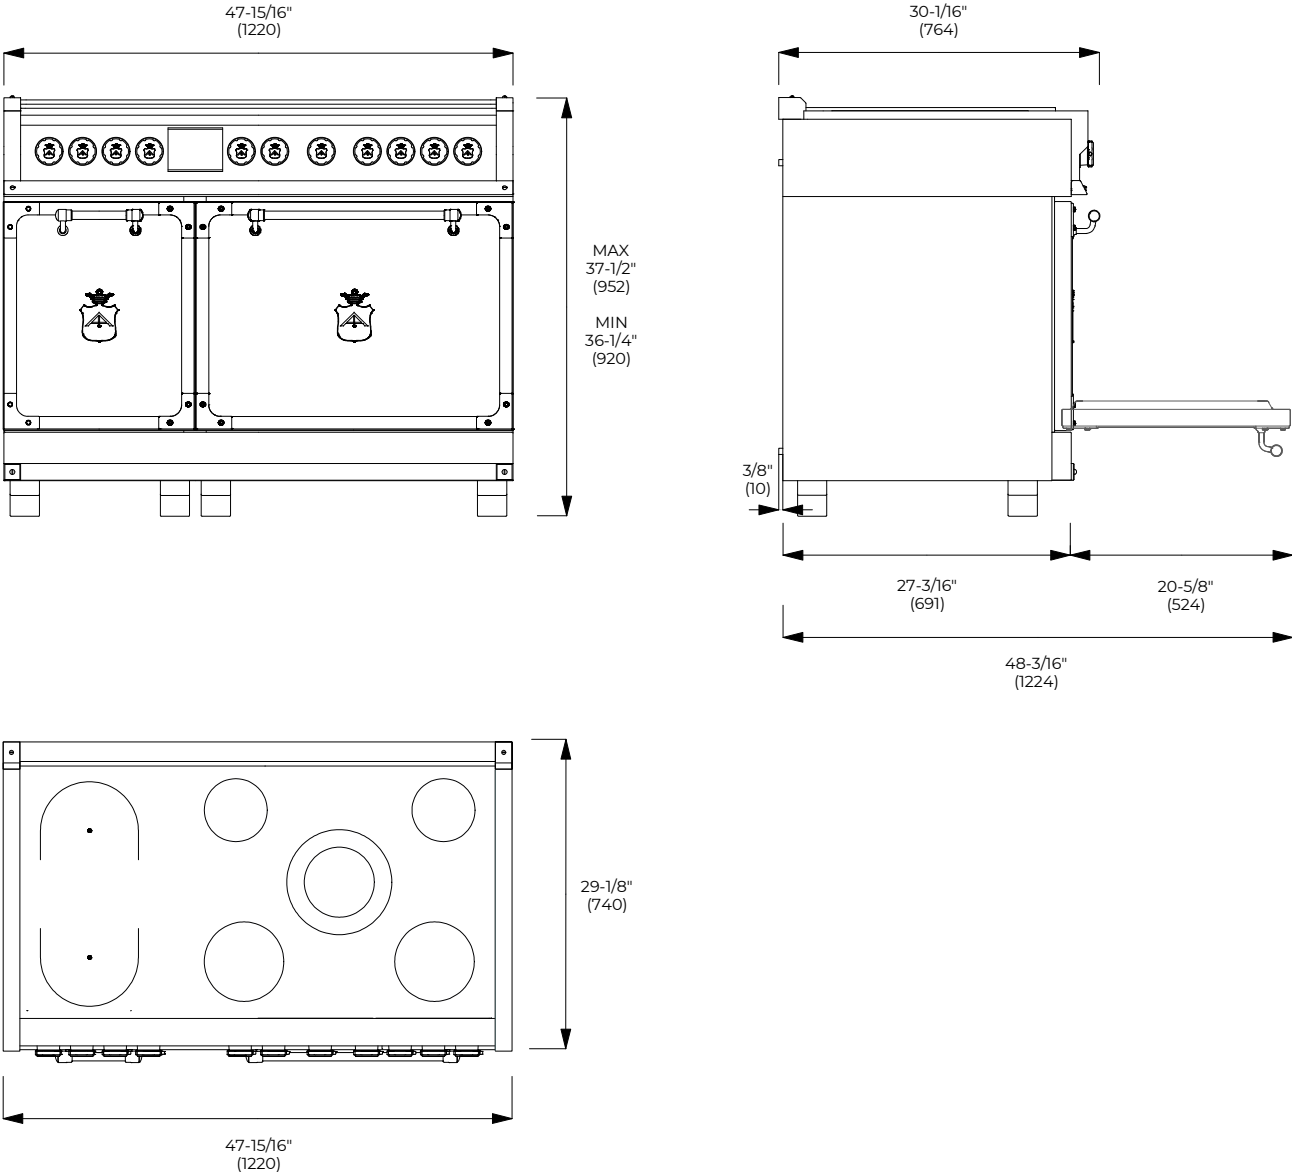


FIORENTINA 48" INDUCTION


1M002ZV1015A SOLID DOOR  
 1M002ZV1016A GLASS DOOR

VER. 1.0 - 2024.05.30

MEASUREMENTS - 1M002ZV1016A - GLASS DOOR

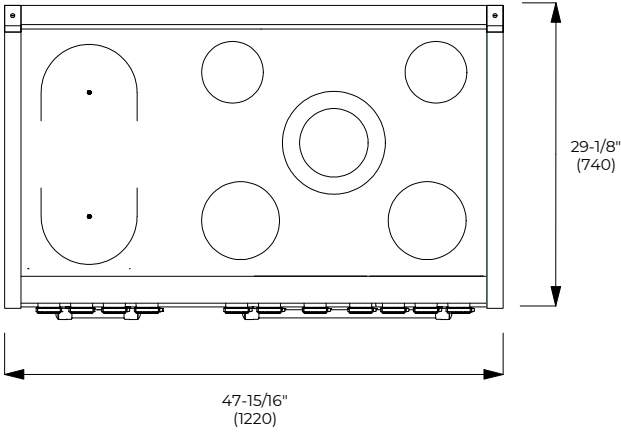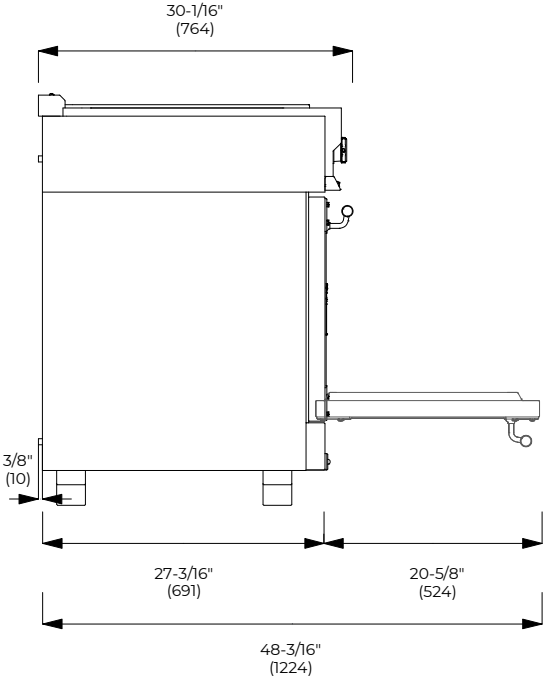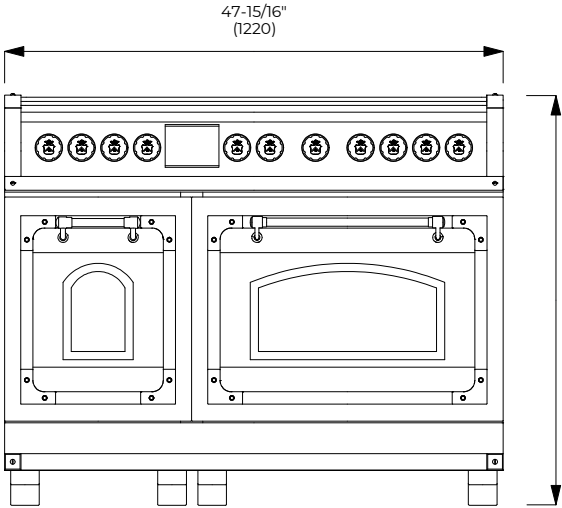

CUTOUT REQUIREMENTS

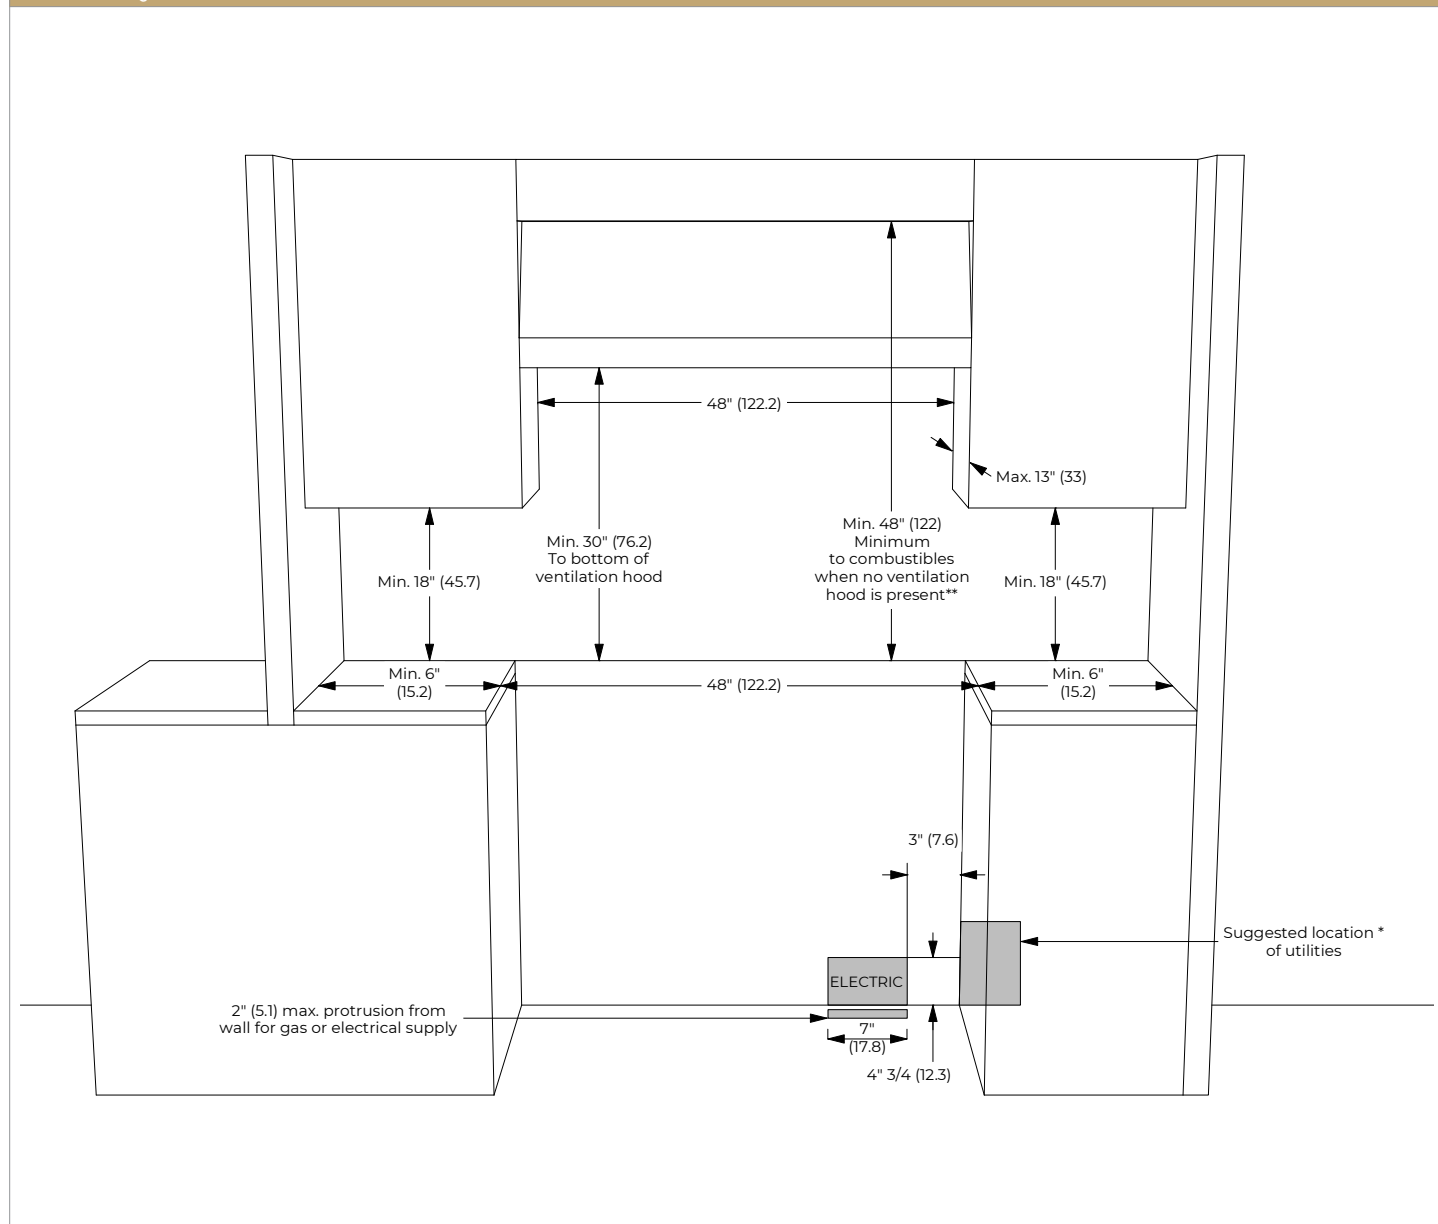

\*\*NOTE: Ensure your installation also complies with local and national building and fire codes. If the surface of the entire back wall above the range and below the hood is not composed of a non-combustible material then the 9" accessory back guard must be used.

\*Consult local code for exact location requirements.