

# SKSSV3001S

## SINGLE WALL OVEN WITH STEAM-COMBI

**SKS** | SIGNATURE  
KITCHEN  
SUITE



### TRUE CONVECTION COOKING

The convection cooking system utilizes a third element and fan to cook food quickly and evenly, on every rack.

### STEAM-COMBI CONVECTION OVEN

Versatile oven combines steam and convection cooking for gourmet results. The convection system cooks food quickly and evenly while steam helps to preserve texture, appearance and taste.

### STEAM SOUS VIDE COOKING MODE

Enjoy sous vide results right in the spacious oven, without preheating. Achieve delicious results that are moist and tender on the inside, crisp and flaky on the outside, all with minimal effort.

### SPEED-CLEAN™

Makes fast work of cleaning a lightly-soiled oven with just a ten minute cycle, using only water.

### GLIDESHUT™ DOOR

The door opens and closes gently with grace and elegance.

### WI-FI ENABLED FOR SMART CONTROL

The innovative wi-fi feature, powered by ThinQ® Technology, lets you cook and monitor from anywhere.

### Innovation

|  |     |
|--|-----|
| Wi-Fi Enabled for ThinQ® Control with iPhone / Android App | Yes |
| Remote Operations  | Yes |

### Oven Features & Performance

|                                      |  |
|--------------------------------------|--|
| Oven Type                            | Steam-Combi Convection   |
| Capacity                             | 4.7 cu. ft.  |
| Cooking Modes                        | Convection Bake, Convection Roast, Bake, Broil, Auto Cook, Steam Cook (Steam-Combi, Gourmet Steam, Steam Sous Vide), Warm, Proof, My Recipes, RapidHeat Roast+ |
| Interior Color                       | Blue   |
| Oven Cleaning                        | Self Cleaning & Speed-Clean™   |
| Variable Cleaning Time               | Self Cleaning (3,4,5 hrs), Speed-Clean™ (10 min.)  |
| Variable Broil                       | Yes (Full,Center / High,Med,Low)   |
| Broil Element                        | 2,500 W / 1,500 W  |
| Bake Element                         | 2,500 W  |
| Steam Element                        | 1,960 W  |
| GlideShut™ Door                      | Yes  |
| Oven Racks                           | 2 Gliding, 1 Heavy Duty  |
| Rack Positions                       | 5  |
| Oven Meat Probe                      | Yes  |
| Automatic Shut Off (After 12 hrs.)   | Yes  |
| Star-K Certified Sabbath Mode        | Yes  |
| Interior Oven Lights (Auto & Manual) | 2 Halogen  |
| Convection System                    | True Convection  |
| Convection Conversion                | Yes  |
| Convection Element                   | 2,000 W  |
| Proof                                | Yes  |
| Variable Warm                        | Yes (High: 200°F, Med: 170°F, Low: 140°F)  |

# SKSSV3001S

## SINGLE WALL OVEN WITH STEAM-COMBI

**SKS** | SIGNATURE  
KITCHEN  
SUITE

### Controls

|                              |                                |
|------------------------------|--------------------------------|
| Oven                         | Knob+LCD<br>Touch Screen       |
| Display                      | 7 inch LCD                     |
| Electronic Clock & Timer     | Yes                            |
| Lock Out Function            | Yes                            |
| Delay Start Time             | Yes                            |
| Preheat Alarm Light          | Yes                            |
| Audible Preheat Signal       | Yes                            |
| Cooking Complete Reminder    | Yes                            |
| Temperature Display (F or C) | Yes                            |
| Language Options             | English,<br>Spanish,<br>French |

### Technical Specs

|                       |                       |
|-----------------------|-----------------------|
| Rating (240V / 208V)  | 6.1 kW / 4.6 kW       |
| Required Power Supply | 240 / 208V,<br>30 Amp |

### Dimensions and Weight

|   |          |
|---|----------|
| Overall Width (inches)                  | 29 3/4   |
| Overall Depth Including Door (inches)   | 24 15/32 |
| Overall Depth Including Handle (inches) | 27       |
| Overall Depth with Door Open (inches)   | 45 5/8   |
| Overall Height (inches)                 | 29 7/16  |
| Size of Water Tank                      | 1 Liter  |
| Net Weight (approx.)                    | 154 lbs  |
| Shipping Weight (approx.)               | 169 lbs  |

### Accessories

#### Included Accessories

Broiler Pan, Grid, 2 Gliding Racks, Heavy Duty Rack, Meat Probe

### Warranty Summary\*

|                                 |         |
|---------------------------------|---------|
| Limited Warranty, Parts & Labor | 3 Years |
|---------------------------------|---------|


\*These warranties give you specific legal rights and you may have other rights that vary from state to state. For complete warranty details, refer to your Use & Care manual.

# SKSSV3001S


## SINGLE WALL OVEN WITH STEAM-COMBI

**SKS** | SIGNATURE  
KITCHEN  
SUITE

### PRODUCT DIMENSIONS

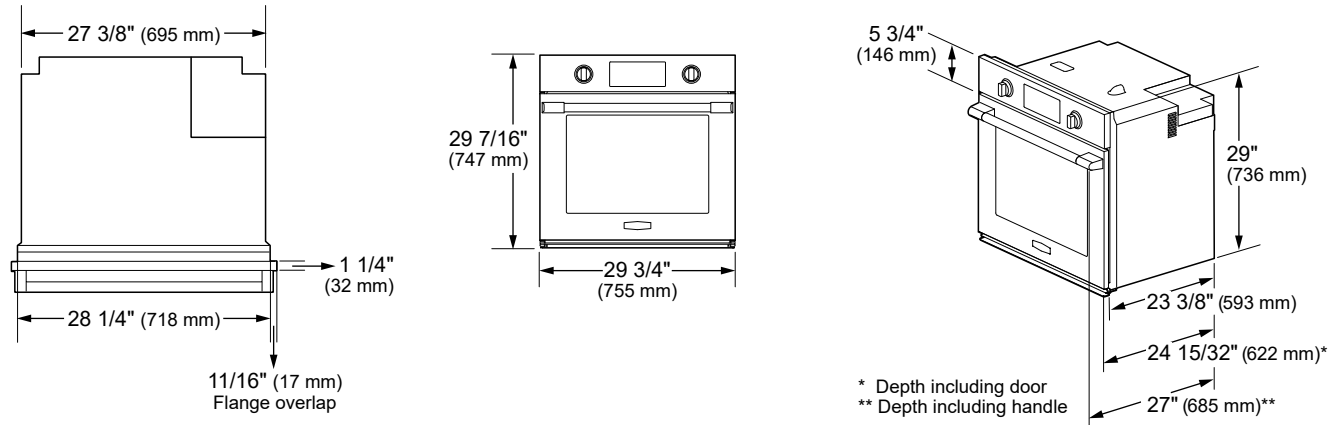

### CUTOUT DIMENSIONS – PROUD INSTALLATION IN WALL CABINET

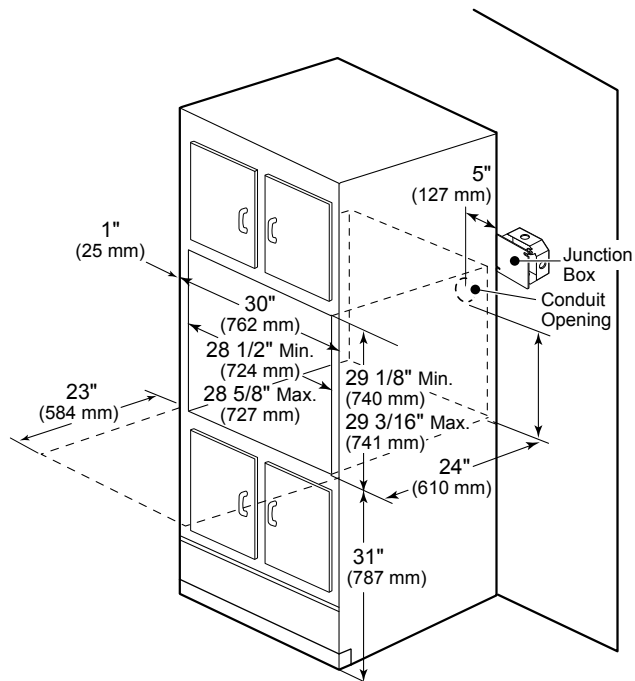

# SKSSV3001S

## SINGLE WALL OVEN WITH STEAM-COMBI

**SKS** | SIGNATURE  
KITCHEN  
SUITE

### CUTOUT DIMENSIONS – UNDER-COUNTER PROUD INSTALLATION

Gas or electric cooktops may be installed over this oven.  
See cooktop installation instructions for cutout size.  
See label on top of oven for approved cooktop models.

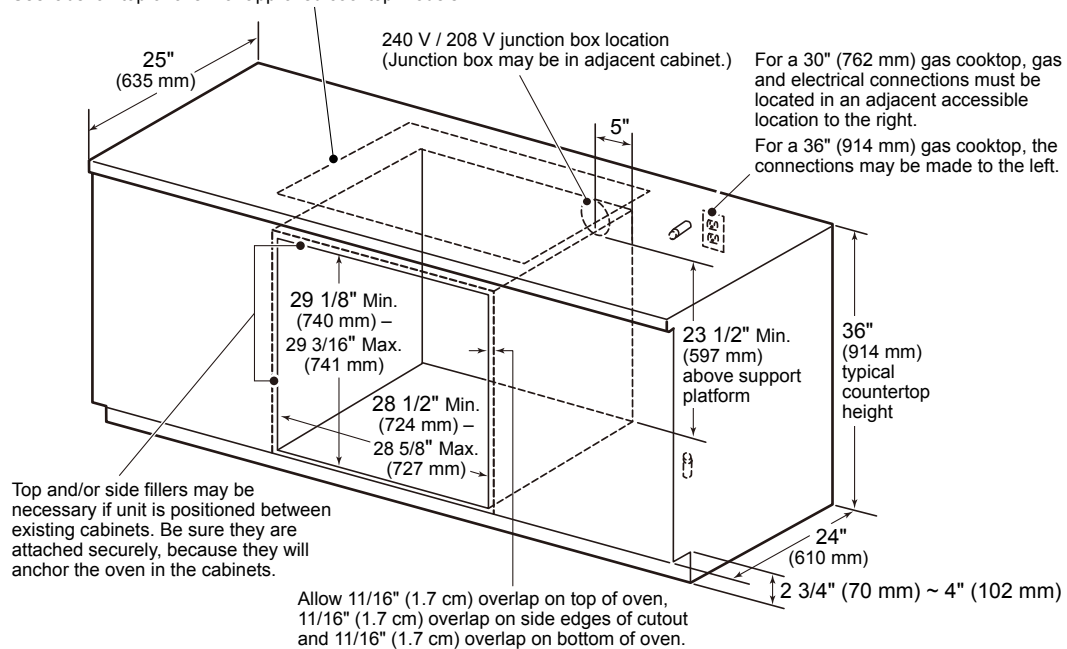


Diagram illustrating the dimensions for a 24-inch wide cabinet installation. The diagram shows a side view of the cabinet with various measurements for height, width, and depth.

Key dimensions labeled:

- 31" (787 mm) - Total height
- 28 9/16" (726 mm) - Upper door height
- 29 5/8" (752 mm) - Lower door height
- 13/8" (35 mm) - Upper door width
- 1" (25 mm) - Lower door width
- 23" (584 mm) - Cabinet depth
- 5" (127 mm) - Junction Box Conduit Opening
- 30" (762 mm) - Upper door height (from top edge)
- 3/16" (5 mm) - Upper door width (from side edge)
- 25" (635 mm) - Lower door height (from bottom edge)
- 23 1/2" (597 mm) - Lower door width (from side edge)
- 3/4" (19 mm) - Detail of internal structure (shown in circular inset)
- Cleat (Spacer) - Indicated at the bottom

25"  
(635 mm)

240 V / 208 V junction box location  
(Junction box may be in adjacent cabinet.)

For a 30" (762 mm) gas cooktop, gas and electrical connections must be located in an adjacent accessible location to the right.

For a 36" (914 mm) gas cooktop, the connections may be made to the left.

Top and/or side fillers may be necessary if unit is positioned between existing cabinets. Be sure they are attached securely, because they will anchor the oven in the cabinets.

29 5/8"  
(752 mm)

30"  
(762 mm)

23 1/2" Min.  
(597 mm)  
above support platform

36"  
(914 mm)  
typical countertop height

24"  
(610 mm)

2 3/4" (70 mm) ~ 4" (102 mm)

1 3/8"  
(35 mm)

3/4"  
(19 mm)