

FRONT-CONTROL ELECTRIC RANGES



FEATURING



TimeSaver™ system

The TimeSaver™ system's Frozen Bake™ Technology allows you to skip preheating for favorites like pizza and lasagna so you can cook frozen foods faster.*



QuickSelect™ system

The QuickSelect™ system's Guided cooktop controls helps you to control the heat without the guesswork. The knobless design uses up/down arrows to select the temperature you need, while heat level indicators show when you are simmering and melting.



CompleteClean system

CompleteClean system's Adjustable self-cleaning allows you to take on all kinds of messes in the oven with cleaning settings for light, moderate or heavy soils.

Every day, care.™

*Compared to a traditional preheat and bake cycle for pizza and lasagna.

Front-Control Electric Ranges



WEE510S0F

NEW

4.8 cu. ft.



TimeSavor™ system

- Frozen Bake™ technology



QuickSelect™ system

- Guided cooktop controls
- FlexHeat™ dual radiant elements



CompleteClean system

- Adjustable self-cleaning
- Easy-wipe ceramic glass cooktop



HeatRight™ system

- Temperature sensor



ReadySet™ system

- Keep Warm
- Delay Cook

Available Colors



W
White




B
Black



S
Stainless Steel

Product Dimensions




- A. 13^{1/8}" (3.0 cm) height from cooktop to top of vent
- B. 29^{1/4}" (75.9 cm)
- C. Model/serial/rating plate (located behind the oven door on the top right-hand side of the oven frame)
- D. 36" (91.4 cm) height to top of cooktop edge with leveling legs
- E. 28^{5/8}" (72.1 cm) max. depth from front of console to back of range
- F. 29^{1/4}" (73.7 cm) max. depth from handle to back of range

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.

* Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.

Cabinet Dimensions

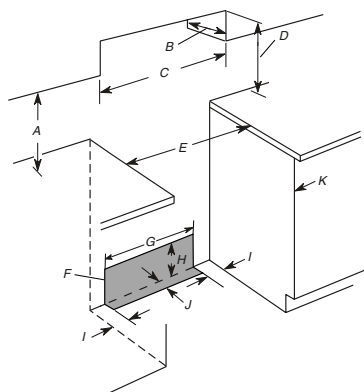

- A. 18" (45.7 cm) upper side cabinet to countertop
- B. 13" (33 cm) max. upper cabinet depth
- C. 30" (76.2 cm) min. opening width
- D. For minimum clearance to top of cooktop, see NOTE*
- E. 30" (76.2 cm) min. opening width
- F. The shaded area is recommended for installation of grounded outlet.
- G. 13^{1/8}" (33.3 cm)
- H. 7^{1/8}" (19.5 cm)
- I. 4^{1/8}" (12.2 cm)
- J. 3^{1/8}" (9.4 cm)
- K. Cabinet door or hinges should not extend into the cutout.

***NOTE:** 24" (61.0 cm) minimum when bottom of wood or metal cabinet is shielded by not less than 1/2" (0.64 cm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper. 30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

ADDITIONAL FEATURES

- Closed door broiling
- Sabbath mode
- Star-K certified
- ADA compliant

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

