



D100 Series Director Collection

When real dynamic bass from the ceiling is the demand, the Director 100 series is the obvious answer. A massive 10" woofer backs up the incredible pivoting FocalPoint™ mid/tweeter assembly in our TriLinear®, three-way configuration assuring the sound ends up exactly where it needs to be. In addition, this 10" speaker astoundingly fits into a footprint the size of a conventional 8". The Director 100 is sure to impress.



D108



D106



D104

Director Technology

The entire speaker pivots allowing the sound to be directed toward the listening area from anywhere in the room.

DPSD™ Tweeter

Featured in the C68 and C66, this patented tweeter has the greatest output and is able to crossover much lower to either the woofer or the midrange improving both dispersion and the frequency response.

Woofer Cone Materials

Designed from the ground up, we only use the finest materials for our woofers to ensure optimal performance in response with speed and precision.

Compression Molded Baskets

These complex baskets that support the woofer cones were computer designed and compression molded with absolute precision allowing for unique support and venting elements to assure peak performance.

TriLinear Configuration (TLC)

The three-driver design is efficient and is more precise by dividing the frequency spectrum into smaller segments allowing the individual drivers to concentrate on a more limited sonic palette.

Tool-less Mounting System

The ZipClip™ secures the speaker in the ceiling with the exact torque to ensure a tight fit. This is accomplished by squeezing the clips into place and locking the speaker with a twist.

X-Wave™ Woofer Surround


This suspension element absorbs unwanted frequencies that reflect up and down the woofer cone to reduce harmonic distortion while maintaining the desired linear travel of the woofer.

EQ Adjustment


These switches on the baffle allows the adjustment of the output of either the high frequencies or both high and low frequencies to custom tailor the sound based on the proximity of the architectural elements of the room.

Specifications

Model	D108	D106	D104
Part Number	SCD100800	SCD100600	SCD100400
Woofer Cone	Kevlar	Glass Fiber	IMG
Woofer Dimensions	10" (254mm)	10" (254mm)	10" (254mm)
Tweeter Dome	Silk DPSD	Silk DPSD	Aluminum
Tweeter Diameter	0.75" (20mm)	0.75" (20mm)	0.75" (20mm)
Frequency Response	25 Hz - 20 kHz	28 Hz - 20 kHz	28 Hz - 20 kHz
Impedance	8 ohm	8 ohm	8 ohm
Power Handling	50 - 200 Watts	50 - 175 Watts	50 - 150 Watts
Diameter	11" (279mm)	11" (279mm)	11" (279mm)
Grille Diameter	11.25" (286mm)	11.25" (286mm)	11.25" (286mm)
Cutout Diameter	10.375" (264mm)	10.375" (264mm)	10.375" (264mm)
Mounting Depth	7.5" (188mm)	7.5" (188mm)	7.5" (188mm)

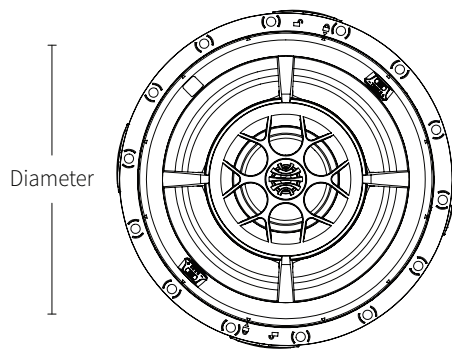

Woofer
Diameter



Mounting
Depth

*Not to Scale