# **HBD524** • 24" Dual-Zone Beverage Center • 5 Class











Stainless Frame

Integrated Frame

Integrated Solid

# **Additional Options**

- Accessory panels are designed for easy installation on Integrated models
- Stainless lock model available







**Key Features** 

- Industry Exclusive: Full-depth lower interior maximizes storage options
- Industry Leading: Variable speed compressor delivers maximum energy efficiency, faster temperature response, and quieter operation
- Stainless steel interior
- Stainless steel cabinet, toe kick, and accents
- U-Adjust™ Interior: 17 adjustable positions
- One removable, full-extension Slide & Secure™ Bin
- One removable, full-extension stainless steel shelf
- Two removable, full-extension wine racks
- Convection cooling system provides a quick cool down and consistent temperature
- Independently controlled dual zones

- Temperature range: (upper compartment) 38°F 65°F; (lower compartment) 33°F - 45°F
- Adjustable bright white or blue LED lighting
- Soft close door with articulating hinge
- Volume of 5.1 cu ft holds up to 14 wine bottles (750 ml) and 68 bottles (12 oz) or 72 cans (12 oz)
- Digital touch pad control with blue LED display
- Use of U-Line Connect<sup>™</sup> App is included during the two-year parts and labor warranty period
- Stainless steel handle (7/8" diameter)
- Integrated model requires 3/4" custom door panel and handle (not supplied by U-Line)
- Field reversible door is shipped right-hand hinged
- Built-in or freestanding
- Four adjustable leveling legs

### **Model Details**

Model	Voltage/Hz	Door Swing	Finish	Shipping Weight
UHBD524-SG01A	115 / 60	Field Reversible	Stainless Frame	153 lb
UHBD524-SG41A	115 / 60	Right-Hand Hinged	Stainless Frame (with lock)	154 lb
UHBD524-SG51A	115 / 60	Left-Hand Hinged	Stainless Frame (with lock)	154 lb
UHBD524-IG01A	115 / 60	Field Reversible	Integrated Frame	148 lb
UHBD524-IS01A	115 / 60	Field Reversible	Integrated Solid	142 lb


### Accessories


Model	Description	Finish	Shipping Weight
ULAGRILLE24	Adjustable Grille (Accepts Integrated Panel)	Black	3 lb
ULASHP24FRAME*	Stainless Handleless Panel Frame	Stainless	10 lb
ULASHP24SOLID*	Stainless Handleless Panel Solid	Stainless	15 lb


<sup>\*</sup>Installs on integrated models.

Front Side Top

\*Add  $^{1}\!/_{2}$ " for Integrated models with  $^{3}\!/_{4}$ " integrated panel installed.





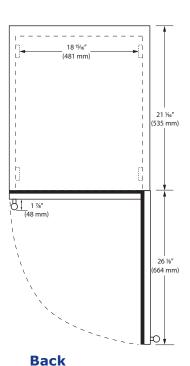


# **Specifications**

Model	HBD524	
Amps: Running	1.2	
Capacity: Bottle (12 oz)	68	
Capacity: Can (12 oz)	72	
Capacity: Volume (cu ft)	5.1	
Capacity: Wine Bottle (750 ml)	14	
Dimensions: Product Depth	22 <sup>15</sup> / <sub>16</sub> " / 583 mm	
Dimensions: Product Height (Min.)	33 <sup>11</sup> / <sub>16</sub> " / 855 mm	
Dimensions: Product Width	23 <sup>5</sup> /8" / 600 mm	
Energy Consumption: Avg. Per Year	220 kWh	
Panel Height	30" / 762 mm	
Panel Thickness	³/4" / 20 mm	
Panel Type	2 3/4" / 70 mm Frame Panel or Solid Panel	
Panel Width	23 ½" / 595 mm	
Product Weight: Max	154 lb	
Refrigerant Type:	R600a	
Sabbath (Star K Certified)	Yes	
Temperature Range (upper)	38°F - 65°F	
Temperature Range (lower)	33°F - 45°F	

# Power Cord (222 mm) 1 3/4" (222 mm) 1 3/4" (35 mm)

# **Cabinet Cut-Out**



# **Installation Notes**

- No additional clearance is needed for ventilation
- Do not obstruct front grille air flow











# **Warranty**

- 2 Year (parts & labor) / 5 year sealed system (parts)
- + Additional 1 Year (parts & labor) warranty at no cost with product registration

See complete warranty for details

Please visit u-line.com to view this model's User Guide & Service Manual. All Specifications are subject to change without notice.