



Exclusive iQ Blower System™ with GPS Technology (see page 62) for the quietest, most energy efficient and fastest smoke and odor removal available in a range hood; choice of 13 Internal or External blower options offered separately.

Four-speed LCD electronic control includes air-refresh cycle

and filter clean reminder for the ultimate in convenience for a fresh kitchen.

Heat Sentry™ detects excessive heat and adjusts blower to high automatically.

Brilliant halogen lighting bathes the cooking area with crisp, clean illumination.

Automatic sensor control monitors cooking activity to automatically control blower operation for the perfect combination of ventilation and comfort.

Works with optional LinkLogic® enabled SMD dampers or Universal Make-Up Air Dampers.

Model Numbers:

IP29M42SB IP29M54SB



Pro-Style Hi-Flow™ baffle filters with easy to clean bottom panel and halogen lighting.



Hi-Flow™ baffle filters utilize a V-mesh & baffle design to increase airflow, lower sound levels and provide excellent ventilation efficiency.



Optional remote LinkLogic® Control makes access convenient.



The optional LinkLogic® Remote Control can be installed in any single-gang electrical box; features pushbutton switches for the lighting control that previously occupied the space.



Drywall finish trim kit allows for unique design applications.

Hood Sizes

Widths 42", 54"
Depth 32"
 (Must purchase blower separately)

Finish

Stocked Brushed Professional Grade Stainless Steel
 Special Order Not Available

Features

Lighting Type Halogen, GU10-50W
 Number of Lamps 6 on 42" | 8 on 54"
 Lighting Levels 4
 Lighting Lamps Included Yes
 Control Type 4-speed Electronic
 Control Features LinkLogic® enabled, Heat Sentry™, ASC, Air-Refresh, Filter Clean Reminder
 Remote Control Optional LinkLogic® Wall Control
 Filter Type Hi-Flow™ Baffle Filter
 Non-ducted Capability No

Hood Blower Options (Must choose one blower sold separately)


Internal	iQ6	iQ12	P3	P6	P12
Blower CFM	600	1200	300	600	1200
Sones Low/High	0.3/7.5	0.3/10.0	0.3/3.5	2.0/9.5	2.25/12.0
External In-line	ILB3	ILB6	ILB9	ILB11	
Max CFM	280	600	800	1100	
Sone levels are typically half of comparable CFM internal blowers.					
External Exterior	EB6	EB9	EB12	EB15	
Max CFM	600	900	1200	1500	

Accessories

Flue Extension (ducted) AEIP 12", 18", 24" and 30" tall—in all widths
 Drywall Trim Kit ATDIP42SB, ATDIP54SB
 LinkLogic® Wall Control ACW1WH (White)
 Trim Kit for Wall Control ADCW1AL (Almond)
 Make-Up Air Damper SMD6, SMD8
 Universal MUA Damper MD6TU, MD8TU, MD10TU

Installation Requirements

Amps @ 120V: Internal Blower 8.5 Max
 Electrical Connection Plug In
 Duct Size: Internal Blower 8" for iQ6; 10" for iQ12
 Duct Size: External Blower 10"
 Duct Direction Vertical
 Backdraft Damper Included

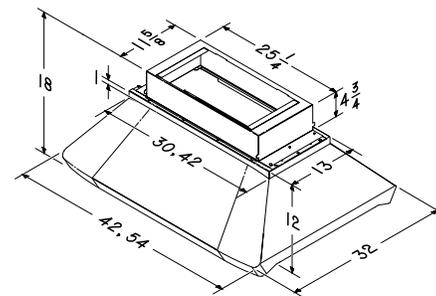

Installation height above the cooking surface: 30"–36"

For more details see the product specifications sheet found at www.BESTRangeHoods.com