



KITCHEN VENTILATION SYSTEMS



Insert

XOI22SMUA

The center panel of the XOI22SMUA provides more than a sleek European appearance, it diverts exhaust flow for perimeter aspiration to improve capture. While the powerful tangential blower and integral sound reduction design minimize background noise.



Wireless
Remote
Included

ADA
Compliant



www.xoappliance.com

XOI Spec Sheet

Insert

2 YEAR
PARTS & LABOR
WARRANTY



Model: XO I22SMUA

Sizes: 22"

Depth: 11 9/16"

Features and Benefits:



- 395 CFM tangential blower optimally removes Smoke, Grease and Odors.
- 3 speed electronic push button remote control
- 15 Minute auto shut-off timer function
- Twin, Three level 50W Halogen lighting provides the perfect amount of illumination
- Dim: 20 11/16" W x 11 9/16" D x 11 1/4" T
Cut Out: 19 1/8" W x 10 3/8" D
- The center panel masks dishwasher safe filters and directs air flow for perimeter aspiration, superior capture with a sleek European look.
- Mounting Height from cooking surface 27"-32"
- Sound level 0.5 - 3.2 Sones

Duct Options and Electrical Requirements:

- 6 inch duct required.
- Ductless Option for applications where no ducting is available
- AC 120v-60Hz (6.2amp).

Options:

Optional recirculation kit available
XORFK04

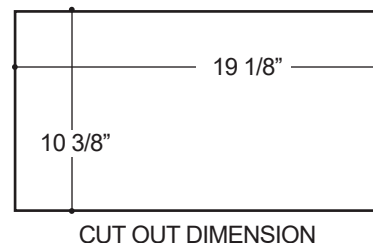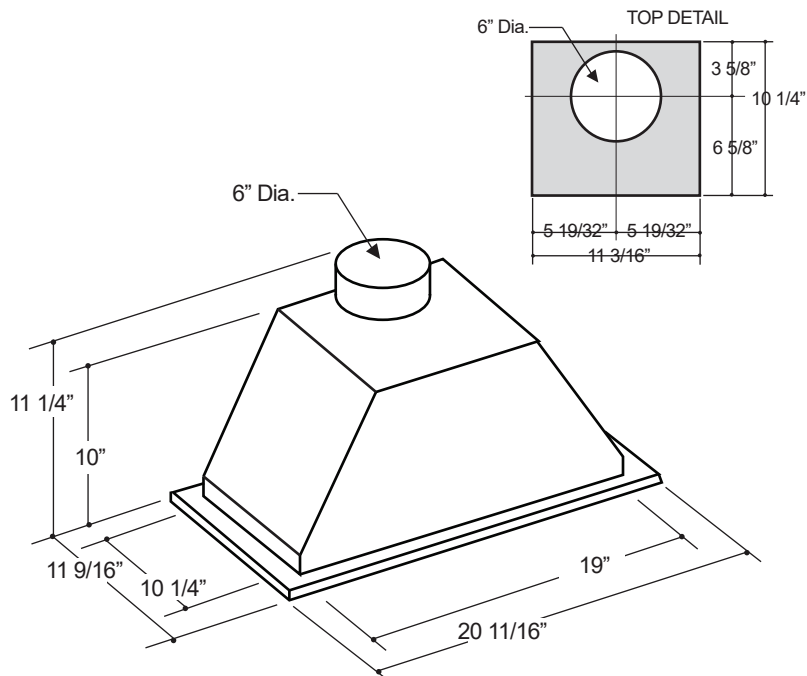

CUT OUT DIMENSION

WIDTH	DEPTH	CFM
22"	11 5/8"	395

XO

www.xoappliance.com

XO is Exclusively Distributed by:
Eastern Marketing Corp 24 Eisenhower Parkway Roseland,
New Jersey 07068 800-966-8300
www.easternmarketingcorp.com

All XO hoods are UL approved.

DESIGNED & CRAFTED IN
ITALY




KITCHEN VENTILATION SYSTEMS



XOI28S

The center panel of the XOI28S provides more than a sleek European appearance. It diverts exhaust flow for perimeter aspiration to improve capture. While the powerful tangential blower and integral sound reduction design minimize background noise

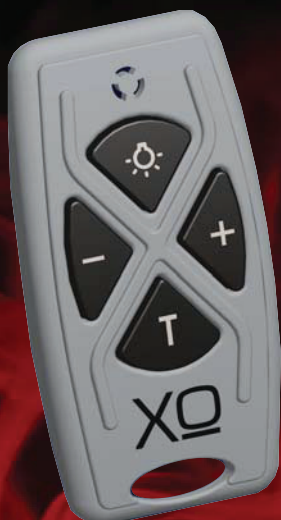

Wireless
Remote
Included

ADA
Compliant



www.xoappliance.com

XOI Spec Sheet

Insert

2 YEAR
PARTS & LABOR
WARRANTY



Model: XOI28S

Sizes: 28"

Depth: 11 9/16"

Features and Benefits:



- 600 CFM tangential blower optimally removes Smoke, Grease and Odors.
- 3 speed electronic push button remote control
- 15 Minute auto shut-off timer function
- Twin, Three level 50W Halogen lighting provides the perfect amount of illumination
- Dim: 28 3/8" W x 11 9/16" D x 11 1/4" T
Cut Out: 26 3/4" W x 10 3/8" D
- The center panel masks dishwasher safe filters and directs air flow for perimeter aspiration, superior capture with a sleek European look.
- Mounting Height from cooking surface 27"-32"
- Sound level 1.2 - 4.2 Sones

Duct Options and Electrical Requirements:

- 6 inch duct required.
- Ductless Option for applications where no ducting is available
- AC 120v-60Hz (6.2amp).

Options:

Optional recirculation kit available
XORFK04

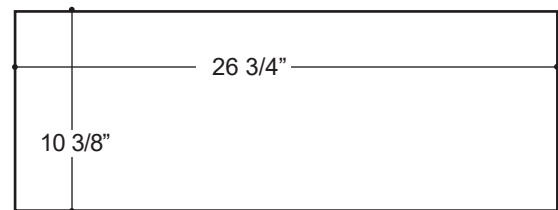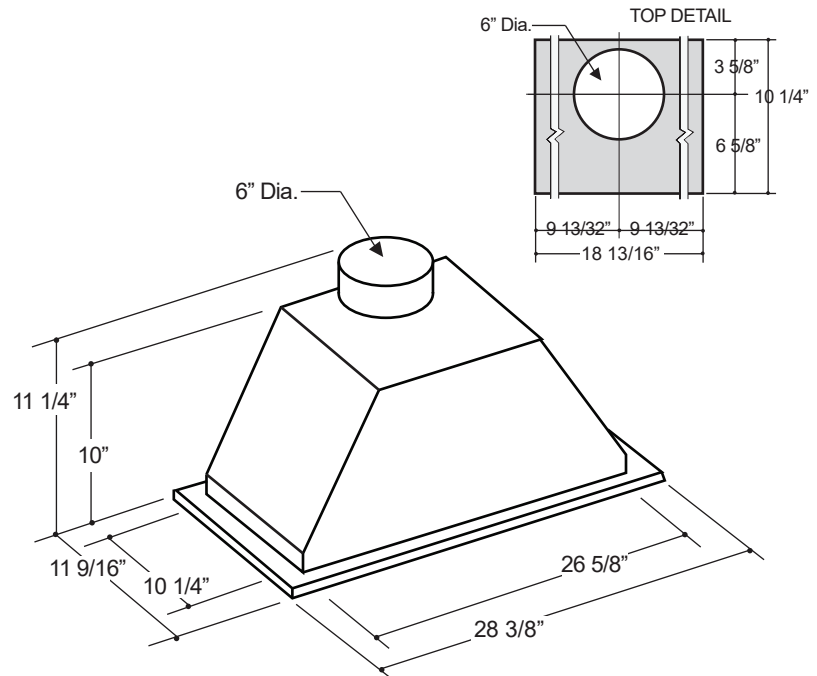

CUT OUT DIMENSION

WIDTH	DEPTH	CFM
28"	11 5/8"	600

XO

www.xoappliance.com

XO is Exclusively Distributed by:
Eastern Marketing Corp 24 Eisenhower Parkway Roseland,
New Jersey 07068 800-966-8300
www.easternmarketingcorp.com

All XO hoods are UL approved.

DESIGNED & CRAFTED IN

ITALY




KITCHEN VENTILATION SYSTEMS



XOI28SMUA

The center panel of the XOI28SMUA provides more than a sleek European appearance. It diverts exhaust flow for perimeter aspiration to improve capture. While the powerful tangential blower and integral sound reduction design minimize background noise

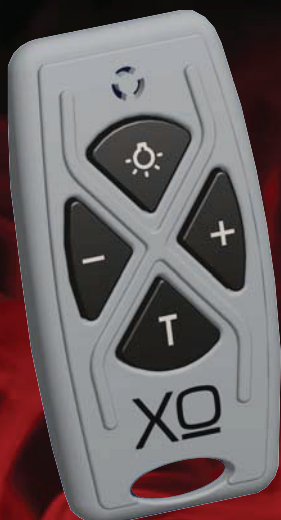

Wireless
Remote
Included

ADA
Compliant



www.xoappliance.com

XOI Spec Sheet

Insert

2 YEAR
PARTS & LABOR
WARRANTY



Model: XOI28SMUA

Sizes: 28"

Depth: 11 9/16"

Features and Benefits:



- 395 CFM tangential blower optimally removes Smoke, Grease and Odors.
- 3 speed electronic push button remote control
- 15 Minute auto shut-off timer function
- Twin, Three level 50W Halogen lighting provides the perfect amount of illumination
- Dim: 28 3/8" W x 11 9/16" D x 11 1/4" T
Cut Out: 26 3/4" W x 10 3/8" D
- The center panel masks dishwasher safe filters and directs air flow for perimeter aspiration, superior capture with a sleek European look.
- Mounting Height from cooking surface 27"-32"
- Sound level 0.5 - 3.2 Sones

Duct Options and Electrical Requirements:

- 6 inch duct required.
- Ductless Option for applications where no ducting is available
- AC 120v-60Hz (6.2amp).

Options:

Optional recirculation kit available
XORFK04

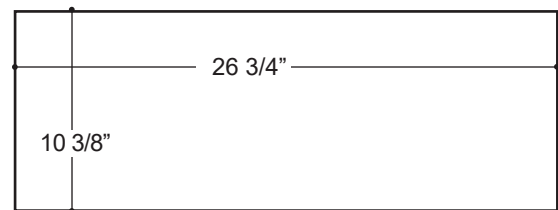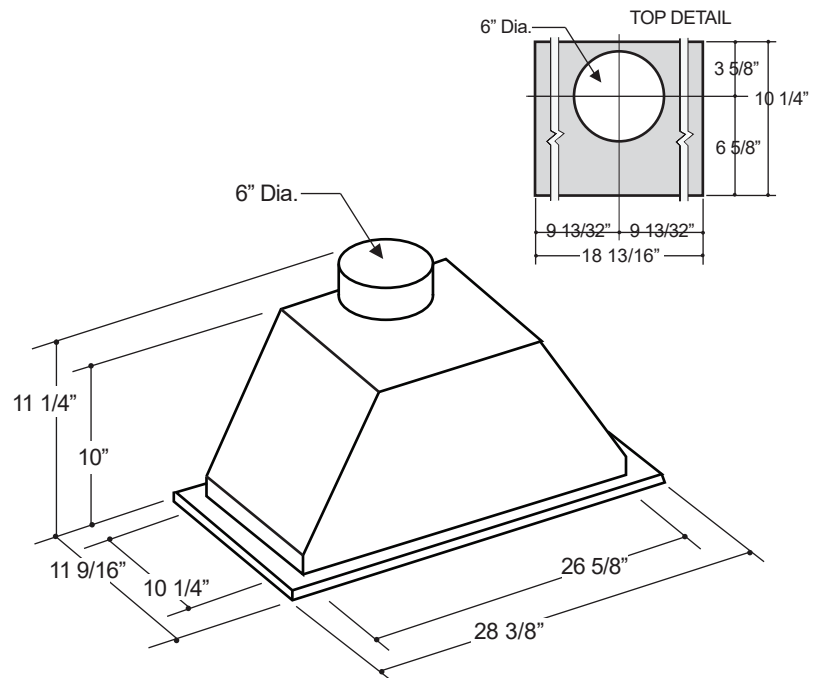

CUT OUT DIMENSION

WIDTH	DEPTH	CFM
28"	11 5/8"	395

XO

www.xoappliance.com

XO is Exclusively Distributed by:
Eastern Marketing Corp 24 Eisenhower Parkway Roseland,
New Jersey 07068 800-966-8300
www.easternmarketingcorp.com

All XO hoods are UL approved.

DESIGNED & CRAFTED IN

ITALY