

FDWCIC

PROFESSIONAL FEATURES

- ■12 beech natural wood front shelves store 60 bottles
 - 30 in Upper Compartment
 - 30 in Lower Compartment
- Uniform air circulation maintains consistent temperatures throughout
- Two independent zones with dedicated evaporators
- Extremely quiet compressor with electronic controls
 - Maintains temperature to within 1°F
- Triple-Pane Bronzed Glass Door protects from harmful UV rays
- Temperature Range: 39°F (4°C) to 64°F (18°C)
- Humidity control for enhanced wine preservation
- Two active carbon filters
- Easy user interaction allows for personalization of the settings
- Energy-efficient LED lighting enhances visibility
- Stainless steel backwall

DESIGN FEATURES

- Patented Double Pivot Hinge has three-dimensional adjustability for a perfect fit in integrated installations
- Hinge damper allows for smoothness when opening and closing door
- Unit is custom panel ready to accept matching cabinetry panels or the Viking Professional and RVL Door Panel Kits



FDWCIC7240R (shown with custom panel)

MODEL NUMBERS

- FDWCIC7240L 24"W. Integrated Wine Column, Custom Panel; Left Hinge
- FDWCIC7240R 24"W. Integrated Wine Column, Custom Panel; Right Hinge

ACCESSORIES

■ PHK528-SS — Professional Stainless Steel handle (1 piece/28")

WARRANTY

- 2-year full covers complete unit
- 6-year full sealed refrigeration system
- 90-day full cosmetic parts such as glass, painted items, and decorative items
- 12-year limited sealed refrigeration system




FDWCIC

PROFESSIONAL DOOR PANEL KITS

- VI724WDPL* 24"W. Integrated Wine Cellar Door Panel Kit with Handle, Left Hinge
- VI724WDPR* 24"W. Integrated Wine Cellar Door Panel Kit with Handle, Right Hinge

DOOR PANEL COLOR FINISHES*

■ Stainless Steel (SS)



RVL DOOR PANEL KITS

- MVI624WDPLSS** 24"W. Integrated Wine Cellar Door Panel, RVL Stanless Steel, Left Hinge
- MVI624WDPRSS** 24"W. Integrated Wine Cellar Door Panel, RVL Stanless Steel, Right Hinge

RVL DOOR PANEL FINISHES**

■ Stainless Steel (SS)

24"W. INTEGRATED WINE CELLAR						
DESCRIPTION	FDWCIC7240					
Overall Width	23-7/8 (60.8 cm)					
Overall Height	83-1/2" (212.1 cm) min. to 84-1/2" (214.6 cm) max.					
Overall Depth from Rear	To front edge of side trim: 22" (56.0 cm) To front of top grille: 24" (61.0 cm)					
Cutout Width	24" (61.0 cm)					
Cutout Height	84" (91.5 cm) min. to 84-1/16" (213.5 cm) max.					
Cutout Depth	24" (61.0 cm) plus panel thickness					
Electrical Requirements	115 volt, 60 Hz, 15 amp dedicated circuit; 3-wire cord with grounded 9 ft. 3-prong plug attached to product					
Maximum Amp Usage	2.0 amps					
Maximum Storage Capacity	60 bottles					
Approximate Shipping Weight	337 lb. (152.9 kg)					

Please do not prepare installation from brochure data only. See installation instructions for important clearance/installation information.



FDWCIC

INSTALLATION CUTOUT FEATURES: PANEL-READY

Minimum cutout height 84" (2134 mm)

Cutout width

24" model: 24" (610 mm)

Minimum cutout depth

24" (610 mm) + panel thickness for flush installation


Area to be left clear for the anti-tipping brackets

5" (127 mm) for both right and left sides


Appliance height


83-1/2" (2120 mm) + 1" (25 mm)

WIDTH OF APPLIANCE BODY



Width of appliance with mounting brackets installed (effective width)

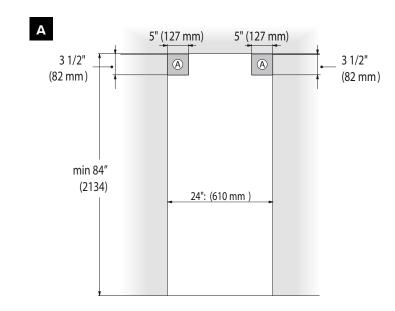

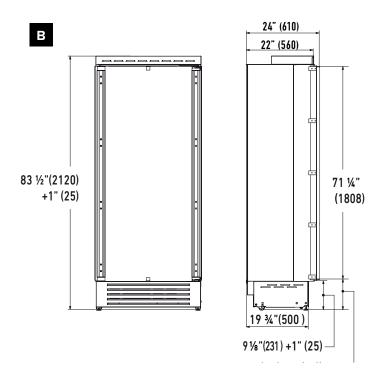





FDWCIC

0925

WIDTH	DOOR WIDTH A	
24"	23 3/4" (604)	


Panels with thickness ranging between 3/4" (19 mm) and 1-1/8" (28 mm). Door panels with max weight of 75 lbs. (34 kg).

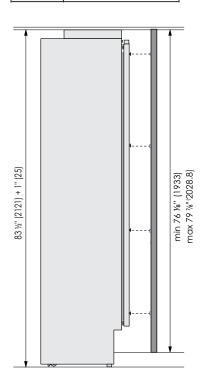

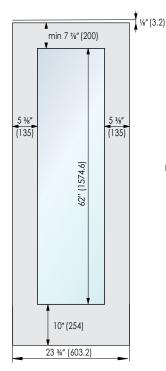


CUTOUT DIMENSIONS FOR COMBINED INSTALLATION

		18"	24"	30"	36"
	18"	36" (914 mm)	42" (1067 mm)	48" (1220 mm)	54" (1372 mm)
В	24"	42" (1067 mm)	48" (1220 mm)	54" (1372 mm)	60" (1520 mm)
	30"	48" (1220 mm)	54" (1372 mm)	60" (1520 mm)	66" (1676 mm)
	36"	54" (1372 mm)	60" (1524 mm)	66" (1676 mm)	72" (1829 mm)



DOOR-SWING CLEARANCE

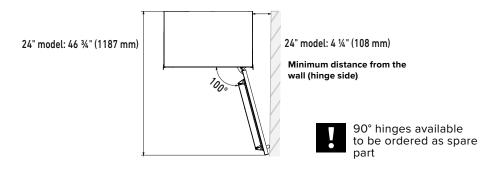



VIKING RANGE, LLC 111 FRONT STREET GREENWOOD, MISSISSIPPI 38930 USA

For detailed product information, model numbers, or to request a quote call 1-888-845-4641 or visit vikingrange.com © 2025 Viking Range, LLC All rights reserved. Specifications subject to change without notice.

F60489