

Refrigeration Equipment Sandwich/Salad Preparation Table, 60" with 16GN 1/6 containers- Stainless Steel (R290)

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____



738257 (KCHST60.16)

2-door sandwich/salad preparation table for 16 GN 1/6 containers, 60", R290 refrigerant gas, +33/+41°F, stainless steel

Short Form Specification

Item No.

2-door sandwich/salad refrigerated preparation table. Exterior back panel in aluminium, exterior bottom panel in galvanized steel, side and top panels in 430 stainless steel; interior back, top panels and interior bottom panel in 304 stainless steel, worktop in 430 stainless steel.

Built-in refrigeration unit and an insulated lid to maintain food freshness. Fin & Tube Condenser improves performance in high-temperature environments. Automatic Defrost Cooling System to provide worry-free performances.

Full-depth cutting board of 61,2x11,4x0,5 in.

Control panel, Vinyl-Coated Steel adjustable shelves, removable door gaskets and self-closing doors with 90-degree stay-open feature.

Temperature range: +33/+41°F.

R290 gas in the refrigeration circuit.

ETL Safety and Sanitation certifications.

3/5 Years warranty.

Main Features

- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- 1/4 HP Compressor.
- Vinyl-Coated Steel adjustable dividers to customize bottle storage effortlessly.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.

Construction


- Stainless steel exterior and interior, durable and easy to clean for daily commercial use.
- External Electronic Digital Temperature Control for easy setting and monitoring.
- Removable door gaskets.
- Holds (16) 1/6 pans.
- Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- Insulated lid maintains food freshness.
- Preparation area designed for work station convenience and self food handling, also thanks to the full-depth cutting board.

Optional Accessories


- shelf for 60" mega top, salad and undercounter PNC 880596 ☐
- shelf clips PNC 880611 ☐

APPROVAL: _____

Front

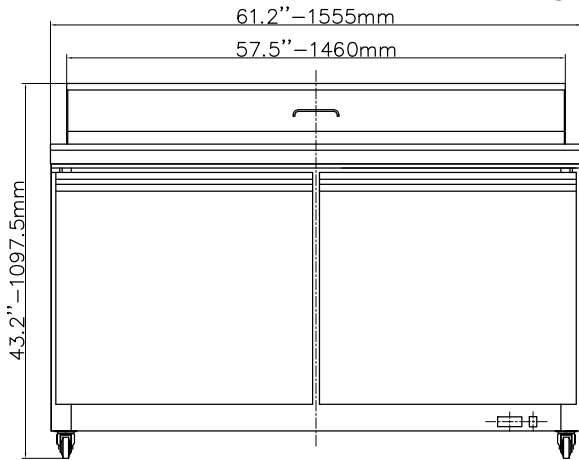


Side

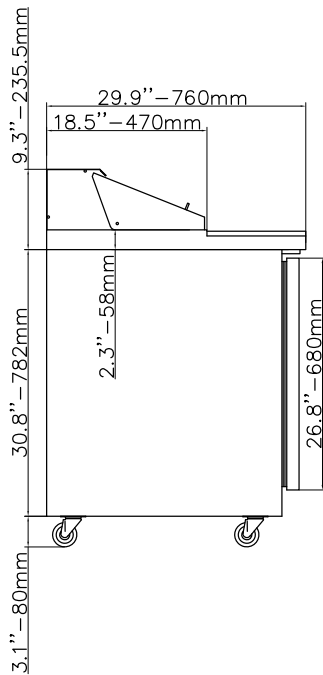

El = Electrical connection

Top

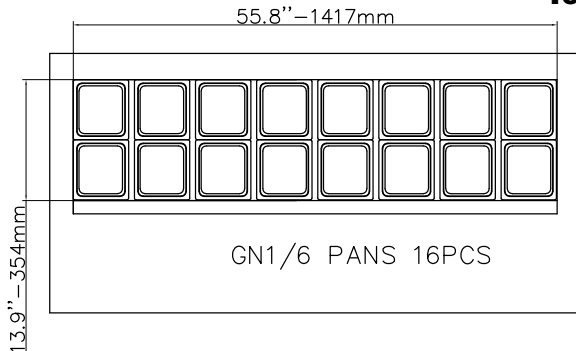

Electric

Supply voltage:

738257 (KCHST60.16) 115 V/1 ph/60 Hz

Electrical power, max:

0.8 kW

Current consumption:

7.5 Amps

Plug type:

USA NEMA 5-15P

Capacity:

Gross capacity:

15.5 cu.feet

Key Information:

Door hinges:

1 Left+1 Right

External dimensions, Width:

61 1/4" (1555 mm)

External dimensions, Depth:

29 15/16" (760 mm)

External dimensions, Height:

43 3/16" (1097.5 mm)

Number and type of doors:

2 Full

Internal Dimensions (depth):

23 13/16"

Internal Dimensions (height):

23 1/2"

Internal Dimensions (width):

56 1/4"

Shipping height:

47 1/4" (1200 mm)

Shipping weight:

370 lbs (168 kg)

Shipping volume:

54.07 ft³ (1.53 m³)

Type of grids (included):

Vinyl-Coated steel

Type of external material:

Stainless Steel

Type of internal material:

Polystyrene

Warranty:

3 / 5 years

Refrigeration Data

Compressor power:

Refrigerant type:

R290

Refrigerant weight:

90 g

Operating temperature min.:

32 °F

Operating temperature max.:

41 °F

Condenser type:

Fin & tube

Defrost type:

Auto Defrost