

## SEDONA BY LYNX™ SERIES

# **36'' SEDONA BUILT-IN GRILL** WITH 3 STAINLESS STEEL BURNERS (L601)








#### **L601 PRODUCT OVERVIEW**

- Variable power—three stainless steel burners combining to provide up to 69,000 BTU
- Dependable performance—direct spark ignition with battery backup
- Perfect clarity—dual halogen grill surface lights
- Quick visibility—temperature gauge
- Easy opening—Lynx Hood Assist Kit
- Steadfast durability—heavy-duty welded construction eliminates gaps where grease can collect
- Ample capacity—891 square inches of cooking surface (618 primary, 273 secondary)
- Beautiful illumination—blue-lit control knobs
- Smooth opening—fluid rotation handle
- Premier platform—stainless steel grilling grates
- Understated luxury—brushed stainless steel finish on canopy, bullnose, and drip tray
- Installation into a combustible enclosure requires an insulated jacket accessory





## **L601 PRODUCT FEATURES**

The Sedona by Lynx<sup>™</sup> Series is always evolving to be the best at something new. That philosophy is reflected in its features. We've refined these features to give you a grilling experience that's both simple and stunning.



**STAINLESS STEEL BURNERS** 



**SPARK IGNITION SYSTEM** 



**CERAMIC RADIANT BRIQUETTES** 



INTEGRATED ILLUMINATION




LYNX HOOD ASSIST



**EXPANSIVE GRILLING SURFACE** 

## FOR MORE INFORMATION ON SEDONA BY LYNX™ SERIES PRODUCT FEATURES. PLEASE VISIT LYNXGRILLS.COM

**L601 ISLAND PREPARATION** 

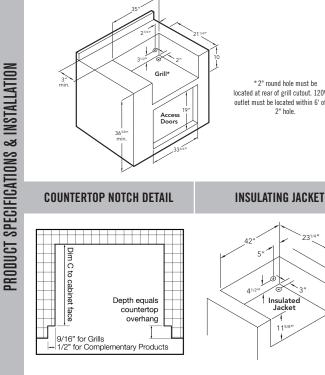

\* 2" round hole must be located at rear of grill cutout. 120V GFI outlet must be located within 6' of the 2" hole.

Insulated Jacket

11



CUT-OUT DIMENSIONS: WIDTH: 35" / HEIGHT: 10" / DEPTH: 21.25"

SHIPPING DIMENSIONS: WIDTH 33.5" / HEIGHT 41" / DEPTH 30" SHIPPING WEIGHT: 180 POUNDS







ELECTRICAL REQUIREMENTS: INSTALLATION REQUIRES AN OUTDOOR 120V/15GFI ELECTRICAL OUTLET ADJACENT TO PRODUCT

COOKING CONFIGURATION: BUILT-IN GRILL WITH 3 STAINLESS STEEL BURNERS

Note: Insulating jacket required for all grills installed into a combustible enclosure. For natural gas grills, commends using ¾" gas lines. Side burners may be rotated 90 degrees. See installation manuals for details.

**IDLYNX** FOR EVEN MORE ON THIS PRODUCT AND OTHER COMPLIMENTARY LYNX PRODUCTS, VISIT LYNXGRILLS.COM