



Product Specifications

Style Number VV674

Construction Mineral Core

Edge Profile Enhanced Painted Bevel

Nominal Dimensions 7" wide, 48" long

	US Units	Metric Units
Actual Product Width	7.6"	19 cm
Actual Product Length	47.64"	121 cm
Overall Product Thickness	0.354"	9 mm
Core Thickness	0.315"	8 mm
Attached Underlayment	Attached Cork	
Attached Underlayment	0.039"	1 mm
Thickness		
Installation Methods	Floating	
Profile	Angle/Tap	
Country of Origin	Imported	
Packaging		
Area per Box	15.08 sq ft	1 sq m
Pieces per Box	6 pcs	
Weight per Box	37.04 lbs	16.8 kg
Boxes per Pallet	60 boxes	



Colors



Scratchless 7x48



Performance

Static Load (ASTM F970)

Resistance to Heat (ASTM F1514)

Resistance to Light (ASTM F1515)

Resistance to Chemicals (ASTM F925)

Smoke Density (ASTM E662)

Passes

Passes

Radiant Panel (ASTM E648) Passes, Class I Slip Resistance (ASTM D2047) ADA compliant

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties


30 Year Scratch

USF Lifetime

Residential Resilient Limited Warranty - Defects, Wear, Waterproof, Petproof, Scratch

20 Year Light Commercial

Coordinating Trim

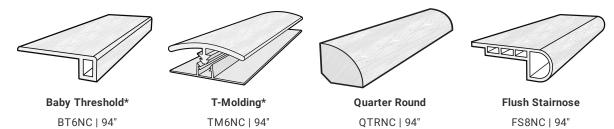

*Packaged with molding track

Stair Tread



Stair Tread

03Z70 | 48"